



Air Conditioning & Heating

SSZ14

HIGH-EFFICIENCY, R-410A SPLIT SYSTEM HEAT PUMP

UP TO 15 SEER

UP TO 8.5 HSPF

COOLING CAPACITY: 18,000 TO 57,600 BTU/H

HEATING CAPACITY: 18,000 TO 59,000 BTU/H

Standard Features

- R-410A chlorine-free refrigerant
- High-efficiency scroll compressor
- High density foam compressor sound blanket
- SmartShift™ technology to ensure quiet reliable defrost
- Factory-installed bi-flow liquid-line filter dryer
- Factory-installed suction-line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high-capacity muffler
- High- and low-pressure switches
- Service valves with sweat connections and easy access to gauge ports
- Copper tube/enhanced aluminum fin coil
- Fully charged for 15' of tubing length
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed

Cabinet Features

- Goodman® brand sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- Service ports and controls are accessible while unit is operating
- When properly anchored, meets the 2001 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



Contents

Nomenclature	2
Product Specifications	3
Expanded Cooling Data	4
Expanded Heating Data	18
AHRI Ratings.....	20
Dimensions	37
Wiring Diagrams	38
Accessories	40



* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the Lifetime Compressor Limited Warranty (good for as long as you own your home) and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec.

** The Best Buy Seal is a registered trademark of Consumers Digest Communications, LLC, used under license.



NOMENCLATURE

	S	S	Z	14	036	1	A	A		
	1	2	3	4,5	6,7,8	9	10	11		
Brand	G Goodman® (Standard Feature Set Models)		S Goodman® (High Feature Set Models)							Engineering * Minor Revision
Product Category	S Split System									Engineering * Major Revision
Unit Type	C Condenser R-22		X Condenser R-410A		H Heat Pump R-22		Z Heat Pump R-410A			Electrical
										1 208/230 V, 1 Phase, 60 Hz
										2 220/240 V, 1 Phase, 50 Hz
										3 208/230 V, 3 Phase, 60 Hz
										4 460 V, 3 Phase, 60 Hz
										5 380/415 V, 3 Phase, 50 Hz
Efficiency										Nominal Capacity
13 13 SEER										018 1½ Tons 048 4 Tons
14 14 SEER										024 2 Tons 060 5 Tons
16 16 SEER										030 2½ Tons 090 7½ tons
										036 3 Tons 120 10 Tons
										042 3½ Tons

* Neither used for order entry or inventory management.



Important EnergyStar Notice: EnergyStar ratings are dependent upon conditions beyond equipment installation. Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet EnergyStar criteria. Ask your contractor for details or visit www.energystar.gov.

SPECIFICATIONS

	SSZ14 0181A	SSZ14 0241A	SSZ14 0301A	SSZ14 0361B	SSZ14 0421A	SSZ14 0481A	SSZ14 0601A
NOMINAL CAPACITIES							
Cooling (BTU/h)	18,000	24,000	28,800	35,000	40,000	46,000	57,000
Heating (BTU/h)	18,000	24,000	29,000	33,000	41,000	47,000	58,000
Decibels	70	72	72	74	73	74	75
COMPRESSOR							
RLA	9.0	12.8	14.1	14.1	17.9	19.9	26.4
LRA	48.0	58.3	73.0	77.0	112.0	109.0	134.0
CONDENSER FAN MOTOR							
Horsepower	1/12	1/6	1/6	¼	¼	¼	¼
FLA	0.6	1.1	1.0	1.5	1.5	1.5	1.5
REFRIGERATION SYSTEM							
Refrigerant Line Size ¹							
Liquid Line Size ("O.D.)	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"
Suction Line Size ("O.D.)	¾"	¾"	¾"	⅞"	1⅛"	1⅛"	1⅛"
Refrigerant Connection Size							
Liquid Valve Size ("O.D.)	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"
Suction Valve Size ("O.D.)	¾"	¾"	¾"	¾"	⅞"	⅞"	⅞"
Valve Connection Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	140	160	185	186	210	270	275
ELECTRICAL DATA							
Volts -Hz-Phase	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1
Minimum Circuit Ampacity ²	11.9	17.1	18.6	19.1	23.9	26.4	34.5
Max. Overcurrent Protection ³	20	25	30	30	40	45	60
Min / Max Volts	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253
Electrical Conduit Size	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"
SHIP WEIGHT (LBS)	199	207	219	215	242	266	280

¹ Tested and rated in accordance with AHRI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the rating plate for electrical data on the unit being installed.
- Installer will need to supply ⅜" to 1⅛" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of ⅜" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

EXPANDED COOLING DATA — SSZ140181A* / CA*F3131*6A* +TXV / MBR800** *-1

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	675	MBh	17.6	18.3	20.0	-	17.2	17.9	19.6	-	16.8	17.4	19.1	-	16.4	17.0	18.6	-	15.6	16.2	17.7	-	14.4	15.0	16.4	-
		S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-
		ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	15	12	-	17	14	11	-
		kW	1.17	1.19	1.23	-	1.25	1.28	1.32	-	1.33	1.36	1.40	-	1.40	1.43	1.47	-	1.45	1.48	1.53	-	1.50	1.53	1.58	-
		Amps	4.2	4.3	4.4	-	4.5	4.6	4.8	-	4.9	5.0	5.2	-	5.3	5.4	5.6	-	5.6	5.7	5.9	-	5.9	6.1	6.3	-
		Hi PR	213	229	242	-	239	257	271	-	271	292	308	-	309	333	351	-	348	374	395	-	384	413	436	-
	Lo PR	107	113	124	-	113	120	131	-	117	124	136	-	123	131	143	-	129	137	150	-	133	142	155	-	
	600	MBh	17.1	17.7	19.4	-	16.7	17.3	19.0	-	16.3	16.9	18.5	-	15.9	16.5	18.1	-	15.1	15.7	17.2	-	14.0	14.5	15.9	-
		S/T	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-
		ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-
		kW	1.16	1.18	1.22	-	1.24	1.27	1.31	-	1.32	1.35	1.39	-	1.38	1.41	1.46	-	1.44	1.47	1.52	-	1.49	1.52	1.57	-
		Amps	4.2	4.3	4.4	-	4.5	4.6	4.8	-	4.9	5.0	5.2	-	5.2	5.3	5.5	-	5.5	5.7	5.9	-	5.9	6.0	6.2	-
Hi PR		210	227	239	-	236	254	268	-	269	289	305	-	306	329	348	-	344	370	391	-	380	409	432	-	
Lo PR	105	112	122	-	111	119	129	-	116	123	134	-	122	129	141	-	127	136	148	-	132	140	153	-		
525	MBh	15.8	16.4	17.9	-	15.4	16.0	17.5	-	15.1	15.6	17.1	-	14.7	15.2	16.7	-	14.0	14.5	15.9	-	12.9	13.4	14.7	-	
	S/T	0.68	0.57	0.39	-	0.70	0.59	0.41	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.78	0.65	0.45	-	
	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	17	13	-	19	16	12	-	18	15	12	-	
	kW	1.13	1.15	1.19	-	1.21	1.24	1.28	-	1.29	1.31	1.35	-	1.35	1.38	1.42	-	1.41	1.44	1.48	-	1.45	1.48	1.53	-	
	Amps	4.1	4.2	4.3	-	4.4	4.5	4.6	-	4.7	4.9	5.0	-	5.1	5.2	5.4	-	5.4	5.5	5.7	-	5.7	5.8	6.0	-	
	Hi PR	204	220	232	-	229	247	260	-	261	280	296	-	297	319	337	-	334	359	379	-	369	397	419	-	
Lo PR	102	109	119	-	108	115	126	-	112	119	130	-	118	126	137	-	124	132	144	-	128	136	149	-		
75	675	MBh	17.9	18.5	20.0	21.5	17.5	18.0	19.5	21.0	17.1	17.6	19.1	20.5	16.7	17.2	18.6	20.0	15.9	16.3	17.7	19.0	14.7	15.1	16.4	17.6
		S/T	0.84	0.75	0.57	0.36	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42
		ΔT	20	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10
		kW	1.18	1.20	1.24	1.27	1.26	1.29	1.33	1.37	1.34	1.37	1.41	1.46	1.41	1.44	1.48	1.53	1.46	1.50	1.54	1.59	1.51	1.55	1.60	1.65
		Amps	4.2	4.3	4.5	4.6	4.6	4.7	4.8	5.0	5.0	5.1	5.2	5.4	5.3	5.4	5.6	5.8	5.6	5.8	6.0	6.2	6.0	6.1	6.3	6.5
		Hi PR	215	231	244	255	241	259	274	286	274	295	311	325	312	336	355	370	351	378	399	416	388	418	441	460
	Lo PR	108	114	125	133	114	121	132	141	118	126	137	146	124	132	144	154	130	138	151	161	135	143	156	166	
	600	MBh	17.4	17.9	19.4	20.8	17.0	17.5	19.0	20.3	16.6	17.1	18.5	19.9	16.2	16.7	18.1	19.4	15.4	15.8	17.2	18.4	14.3	14.7	15.9	17.1
		S/T	0.80	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.91	0.81	0.62	0.40	0.92	0.82	0.62	0.40
		ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10
		kW	1.17	1.19	1.23	1.26	1.25	1.28	1.32	1.36	1.33	1.36	1.40	1.44	1.40	1.43	1.47	1.52	1.45	1.48	1.53	1.58	1.50	1.53	1.58	1.64
		Amps	4.2	4.3	4.4	4.6	4.5	4.6	4.8	5.0	4.9	5.0	5.2	5.4	5.3	5.4	5.6	5.8	5.6	5.7	5.9	6.1	5.9	6.1	6.3	6.5
Hi PR		213	229	242	252	239	257	271	283	271	292	308	322	309	333	351	366	348	374	395	412	384	413	437	455	
Lo PR	107	113	124	132	113	120	131	139	117	124	136	145	123	131	143	152	129	137	150	159	133	142	155	165		
525	MBh	16.1	16.5	17.9	19.2	15.7	16.2	17.5	18.8	15.3	15.8	17.1	18.3	15.0	15.4	16.7	17.9	14.2	14.6	15.8	17.0	13.2	13.5	14.7	15.7	
	S/T	0.77	0.69	0.52	0.34	0.80	0.71	0.54	0.35	0.82	0.73	0.55	0.36	0.84	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.88	0.79	0.60	0.39	
	ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	20	19	15	11	
	kW	1.14	1.16	1.20	1.24	1.22	1.25	1.29	1.33	1.30	1.32	1.37	1.41	1.36	1.39	1.44	1.48	1.42	1.45	1.49	1.54	1.47	1.50	1.54	1.60	
	Amps	4.1	4.2	4.3	4.5	4.4	4.5	4.7	4.8	4.8	4.9	5.1	5.2	5.1	5.2	5.4	5.6	5.4	5.6	5.7	6.0	5.7	5.9	6.1	6.3	
	Hi PR	206	222	234	244	231	249	263	274	263	283	299	312	300	323	341	355	337	363	383	400	373	401	423	442	
Lo PR	103	110	120	128	109	116	127	135	113	121	132	140	119	127	138	147	125	133	145	155	129	137	150	160		

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — SSZ140181A* / CA*F3131*6A* +TXV / MBR800** -1 (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	675	MBh	18.3	18.7	19.9	21.3	17.8	18.2	19.5	20.8	17.4	17.8	19.0	20.3	17.0	17.4	18.5	19.8	16.1	16.5	17.6	18.8	14.9	15.3	16.3	17.4	
		S/T	0.92	0.86	0.70	0.52	0.95	0.89	0.73	0.54	1.00	0.92	0.75	0.56	1.00	0.94	0.77	0.57	1.00	1.00	0.80	0.60	1.00	1.00	0.80	0.60	
		ΔT	23	22	19	15	23	22	19	15	24	22	19	15	23	22	19	16	22	22	19	15	20	21	18	14	
	600	KW	1.19	1.21	1.25	1.28	1.27	1.30	1.34	1.38	1.35	1.38	1.42	1.47	1.42	1.45	1.50	1.54	1.48	1.51	1.56	1.61	1.53	1.56	1.61	1.66	
		Amps	4.3	4.4	4.5	4.7	4.6	4.7	4.9	5.1	5.0	5.1	5.3	5.5	5.3	5.5	5.7	5.9	5.7	5.8	6.0	6.2	6.0	6.2	6.4	6.6	
		Hi/PR	217	233	247	257	243	262	277	288	277	298	315	328	315	339	358	374	355	382	403	420	392	422	445	465	
	525	Lo/PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	146	155	131	140	153	162	136	145	158	168	
		MBh	17.7	18.1	19.4	20.7	17.3	17.7	18.9	20.2	16.9	17.3	18.5	19.7	16.5	16.8	18.0	19.2	15.7	16.0	17.1	18.3	14.5	14.8	15.8	16.9	
		S/T	0.88	0.82	0.67	0.50	0.91	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.94	0.76	0.57	1.00	0.94	0.77	0.57	
	85	675	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	19	15
			KW	1.18	1.20	1.24	1.27	1.26	1.29	1.33	1.37	1.34	1.37	1.41	1.46	1.41	1.44	1.48	1.53	1.46	1.50	1.54	1.59	1.51	1.55	1.60	1.65
			Amps	4.2	4.3	4.5	4.6	4.6	4.7	4.8	5.0	5.0	5.1	5.3	5.4	5.3	5.4	5.6	5.8	5.6	5.8	6.0	6.2	6.0	6.1	6.3	6.5
600		Hi/PR	215	231	244	255	241	259	274	286	274	295	311	325	312	336	355	370	351	378	399	416	388	418	441	460	
		Lo/PR	108	114	125	133	114	121	132	141	118	126	137	146	124	132	144	154	130	138	151	161	135	143	156	166	
		MBh	16.4	16.7	17.9	19.1	16.0	16.3	17.4	18.6	15.6	15.9	17.0	18.2	15.2	15.6	16.6	17.8	14.5	14.8	15.8	16.9	13.4	13.7	14.6	15.6	
525		S/T	0.84	0.79	0.64	0.48	0.88	0.82	0.67	0.50	0.90	0.84	0.69	0.51	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	0.97	0.91	0.74	0.55	
		ΔT	24	23	20	16	24	23	20	16	25	23	20	16	25	24	21	16	24	23	20	16	23	22	19	15	
		KW	1.15	1.17	1.21	1.24	1.23	1.26	1.30	1.34	1.31	1.34	1.38	1.42	1.37	1.40	1.45	1.49	1.43	1.46	1.51	1.56	1.48	1.51	1.56	1.61	
85		675	Amps	4.1	4.2	4.4	4.5	4.5	4.6	4.7	4.9	4.8	4.9	5.1	5.3	5.2	5.3	5.5	5.7	5.5	5.6	5.8	6.0	5.8	5.9	6.1	6.4
			Hi/PR	208	224	237	247	234	252	266	277	266	286	302	315	303	326	344	359	341	367	387	404	376	405	428	446
			Lo/PR	104	111	121	129	110	117	128	136	115	122	133	142	120	128	140	149	126	134	147	156	131	139	152	161
	600	MBh	18.6	18.9	19.8	21.2	18.1	18.5	19.4	20.7	17.7	18.1	18.9	20.2	17.3	17.6	18.4	19.7	16.4	16.7	17.5	18.7	15.2	15.5	16.2	17.3	
		S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78	
		ΔT	24	24	23	20	25	24	23	20	24	24	23	20	24	24	23	20	22	23	23	20	21	21	21	18	
	525	KW	1.19	1.22	1.26	1.29	1.28	1.31	1.35	1.39	1.36	1.39	1.43	1.48	1.43	1.46	1.51	1.56	1.49	1.52	1.57	1.62	1.54	1.57	1.62	1.68	
		Amps	4.3	4.4	4.6	4.7	4.7	4.8	4.9	5.1	5.1	5.2	5.3	5.5	5.4	5.5	5.7	5.9	5.7	5.9	6.1	6.3	6.1	6.2	6.4	6.7	
		Hi/PR	219	236	249	260	246	265	279	291	280	301	318	331	318	343	362	377	358	386	407	425	396	426	450	469	
	85	600	Lo/PR	110	117	127	136	116	123	135	143	121	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170
			MBh	18.0	18.4	19.3	20.5	17.6	18.0	18.8	20.1	17.2	17.5	18.4	19.6	16.8	17.1	17.9	19.1	15.9	16.2	17.0	18.2	14.8	15.0	15.8	16.8
			S/T	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.74
525		ΔT	25	25	24	20	26	25	24	21	26	25	24	21	26	25	24	21	24	25	24	21	23	23	22	19	
		KW	1.19	1.21	1.25	1.28	1.27	1.30	1.34	1.38	1.35	1.38	1.42	1.47	1.42	1.45	1.50	1.54	1.48	1.51	1.56	1.61	1.53	1.56	1.61	1.66	
		Amps	4.3	4.4	4.5	4.7	4.6	4.7	4.9	5.1	5.0	5.1	5.3	5.5	5.3	5.5	5.7	5.9	5.7	5.8	6.0	6.2	6.0	6.2	6.4	6.6	
525		Hi/PR	217	233	247	257	243	262	277	288	277	298	315	328	315	339	358	374	355	382	403	420	392	422	445	465	
		Lo/PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	146	155	131	140	153	162	136	145	158	168	
		MBh	16.6	17.0	17.8	19.0	16.3	16.6	17.4	18.5	15.9	16.2	16.9	18.1	15.5	15.8	16.5	17.6	14.7	15.0	15.7	16.8	13.6	13.9	14.5	15.5	
525		S/T	0.89	0.85	0.77	0.63	0.92	0.89	0.80	0.65	0.94	0.91	0.82	0.66	0.97	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	0.98	0.89	0.72	
		ΔT	26	25	24	21	26	26	24	21	26	26	24	21	26	26	24	21	26	26	24	21	24	24	23	20	
		KW	1.16	1.18	1.22	1.25	1.24	1.27	1.31	1.35	1.32	1.35	1.39	1.43	1.38	1.41	1.46	1.51	1.44	1.47	1.52	1.57	1.49	1.52	1.57	1.62	
525	Amps	4.2	4.3	4.4	4.6	4.5	4.6	4.8	4.9	4.9	5.0	5.2	5.3	5.2	5.3	5.5	5.7	5.5	5.7	5.8	6.1	5.9	6.0	6.2	6.4		
	Hi/PR	210	226	239	249	236	254	268	280	269	289	305	318	306	329	348	362	344	370	391	408	380	409	432	451		
	Lo/PR	105	112	122	130	111	118	129	138	116	123	134	143	122	129	141	150	127	136	148	158	132	140	153	163		

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — SSZ140241A* / CA* F3636* 6A* +TXV / MBR800** -1

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	956	MBh	23.5	24.4	26.7	-	22.4	23.2	25.5	-	21.9	22.7	24.8	-	20.8	21.5	23.6	-	19.3	20.0	21.9	-	17.1	17.8	20.0	-	
		S/T	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.87	0.72	0.50	-	0.81	0.67	0.46	-	
		ΔT	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	16	14	11	-	14	12	9	-	
	850	KW	1.65	1.68	1.73	-	1.77	1.80	1.86	-	1.87	1.91	1.97	-	2.04	2.09	2.15	-	2.11	2.16	2.22	-	2.04	2.09	2.15	-	
		Amps	10.1	10.2	10.4	-	10.5	10.7	10.9	-	11.0	11.2	11.4	-	12.0	12.2	12.4	-	12.4	12.6	12.9	-	12.4	12.6	12.9	-	
		Hi/PR	222	239	252	-	249	268	283	-	283	305	322	-	323	347	367	-	363	391	412	-	401	432	456	-	
	744	Lo/PR	110	117	128	-	116	124	135	-	121	129	140	-	127	135	147	-	133	142	155	-	138	146	160	-	
		MBh	22.8	23.7	25.9	-	22.3	23.1	25.3	-	21.8	22.6	24.7	-	20.2	20.9	22.9	-	18.7	19.4	21.2	-	16.5	17.2	19.1	-	
		S/T	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.83	0.69	0.48	-	
	75	956	ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	15	12	-	17	14	11	-	15	12	9	-
			KW	1.64	1.67	1.72	-	1.75	1.79	1.84	-	1.86	1.90	1.95	-	2.03	2.07	2.14	-	2.09	2.14	2.21	-	2.03	2.07	2.14	-
			Amps	10.0	10.1	10.3	-	10.5	10.6	10.8	-	11.0	11.1	11.4	-	11.9	12.1	12.3	-	12.3	12.5	12.8	-	12.3	12.5	12.8	-
850		Hi/PR	220	236	250	-	247	265	280	-	280	302	319	-	319	344	363	-	359	387	408	-	397	427	451	-	
		Lo/PR	109	116	127	-	115	122	134	-	120	127	139	-	126	134	146	-	132	140	153	-	136	145	158	-	
		MBh	21.1	21.8	23.9	-	20.6	21.3	23.4	-	20.1	20.8	22.8	-	19.6	20.3	22.3	-	18.6	19.3	21.1	-	17.3	17.9	19.6	-	
744		S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-	
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	15	11	-	17	15	11	-	
		KW	1.60	1.63	1.68	-	1.72	1.75	1.80	-	1.82	1.85	1.91	-	1.90	1.94	2.00	-	1.98	2.02	2.08	-	2.04	2.09	2.15	-	
75		956	Amps	9.8	10.0	10.2	-	10.3	10.4	10.6	-	10.8	11.0	11.2	-	11.2	11.4	11.7	-	11.7	11.9	12.1	-	12.1	12.3	12.6	-
			Hi/PR	213	229	242	-	239	257	272	-	272	293	309	-	310	333	352	-	349	375	396	-	385	414	438	-
			Lo/PR	106	112	123	-	112	119	130	-	116	123	135	-	122	130	142	-	128	136	148	-	132	141	153	-
	850	MBh	23.9	24.6	26.7	28.6	23.4	24.1	26.0	27.9	22.8	23.5	25.4	27.3	22.2	22.9	24.8	26.6	21.1	21.8	23.6	25.3	19.6	20.2	21.8	23.4	
		S/T	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.91	0.81	0.62	0.40	0.94	0.84	0.64	0.41	0.98	0.87	0.66	0.42	0.98	0.88	0.67	0.43	
		ΔT	20	18	15	10	20	18	15	10	20	18	15	10	20	19	15	10	20	18	15	10	19	17	14	10	
	744	KW	1.66	1.70	1.75	1.80	1.78	1.82	1.87	1.93	1.89	1.93	1.99	2.05	1.98	2.02	2.09	2.15	2.06	2.10	2.17	2.24	2.13	2.17	2.24	2.32	
		Amps	10.1	10.2	10.4	10.7	10.6	10.7	10.9	11.2	11.1	11.3	11.5	11.8	11.6	11.8	12.0	12.3	12.0	12.2	12.5	12.8	12.5	12.7	13.0	13.3	
		Hi/PR	224	241	255	266	252	271	286	298	286	308	325	339	326	351	370	386	367	395	417	435	405	436	460	480	
	75	956	Lo/PR	111	118	129	138	117	125	136	145	122	130	142	151	128	136	149	159	134	143	156	166	139	148	161	172
			MBh	23.2	23.9	25.9	27.8	22.7	23.4	25.3	27.1	22.1	22.8	24.7	26.5	21.6	22.2	24.1	25.8	20.5	21.1	22.9	24.5	19.0	19.6	21.2	22.7
			S/T	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.41	0.94	0.84	0.63	0.41
850		ΔT	21	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	20	18	15	10	
		KW	1.65	1.68	1.73	1.78	1.77	1.80	1.86	1.92	1.87	1.91	1.97	2.03	1.97	2.01	2.07	2.13	2.04	2.09	2.15	2.22	2.11	2.16	2.22	2.30	
		Amps	10.1	10.2	10.4	10.6	10.5	10.7	10.9	11.1	11.0	11.2	11.4	11.7	11.5	11.7	11.9	12.2	12.0	12.2	12.4	12.7	12.4	12.6	12.9	13.2	
744		Hi/PR	222	239	252	263	249	268	283	295	283	305	322	336	323	347	367	382	363	391	412	430	401	432	456	475	
		Lo/PR	110	117	128	136	116	124	135	144	121	129	140	150	127	135	147	157	133	142	155	165	138	146	160	170	
		MBh	21.4	22.1	23.9	25.6	20.9	21.6	23.3	25.0	20.4	21.0	22.8	24.4	19.9	20.5	22.2	23.8	18.9	19.5	21.1	22.7	17.5	18.1	19.6	21.0	
75		956	S/T	0.79	0.70	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.38	0.90	0.80	0.61	0.39	0.90	0.81	0.61	0.39
			ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	20	18	15	10
			KW	1.61	1.64	1.69	1.74	1.73	1.76	1.82	1.87	1.83	1.87	1.92	1.98	1.92	1.96	2.02	2.08	2.00	2.04	2.10	2.17	2.06	2.10	2.17	2.24
	850	Amps	9.9	10.0	10.2	10.4	10.3	10.5	10.7	10.9	10.9	11.0	11.2	11.5	11.3	11.5	11.7	12.0	11.8	11.9	12.2	12.5	12.2	12.4	12.7	13.0	
		Hi/PR	215	232	245	255	242	260	275	286	275	296	312	326	313	337	356	371	352	379	400	417	389	419	442	461	
		Lo/PR	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	152	129	137	150	160	133	142	155	165	
	744	MBh	20.7	21.4	23.4	25.1	20.2	20.9	22.8	24.5	20.0	20.7	22.6	24.3	19.8	20.5	22.4	24.1	19.0	19.7	21.6	23.3	18.1	18.8	20.7	22.4	
		S/T	0.76	0.67	0.50	0.33	0.79	0.70	0.52	0.34	0.81	0.72	0.54	0.35	0.83	0.74	0.56	0.37	0.85	0.76	0.58	0.38	0.86	0.77	0.59	0.39	
		ΔT	20	18	14	10	20	18	14	10	20	18	14	10	20	18	14	10	20	18	14	10	19	17	13	9	

kW = Total system power
Amps = outdoor unit amps (comp. +fan)

Shaded area reflects ACCA (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

EXPANDED COOLING DATA — SSZ140241A* / CA* F3636* 6A* +TXV / MBR800** -1 (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	24.3	24.9	26.6	28.4	23.8	24.3	26.0	27.7	23.2	23.7	25.3	27.1	22.6	23.1	24.7	26.4	21.5	22.0	23.5	25.1	19.9	20.4	21.8	23.3
	S/T	0.94	0.88	0.72	0.54	1.00	0.91	0.74	0.56	1.00	0.94	0.76	0.57	1.00	0.97	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.62
	ΔT	22	21	18	15	23	21	19	15	22	21	19	15	22	21	19	15	21	20	18	15	19	20	17	14
	kW	1.67	1.71	1.76	1.81	1.80	1.83	1.89	1.95	1.90	1.94	2.00	2.06	2.00	2.04	2.10	2.17	2.08	2.12	2.19	2.26	2.15	2.19	2.26	2.33
	Amps	10.2	10.3	10.5	10.7	10.6	10.8	11.0	11.2	11.2	11.3	11.6	11.8	11.6	11.8	12.1	12.4	12.1	12.3	12.6	12.9	12.6	12.8	13.1	13.4
	Hi PR	226	244	257	268	254	273	289	301	289	311	328	343	329	354	374	390	370	399	421	439	409	440	465	485
	Lo PR	112	119	130	139	119	126	138	147	123	131	143	153	130	138	150	160	136	144	158	168	140	149	163	174
	MBh	23.6	24.1	25.8	27.6	23.1	23.6	25.2	26.9	22.5	23.0	24.6	26.3	22.0	22.5	24.0	25.7	20.9	21.3	22.8	24.4	19.3	19.8	21.1	22.6
	S/T	0.90	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.96	0.78	0.58	1.00	0.96	0.79	0.59
	ΔT	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	16	23	22	19	15	21	21	18	14
kW	1.66	1.70	1.75	1.80	1.78	1.82	1.87	1.93	1.89	1.93	1.99	2.05	1.98	2.02	2.09	2.15	2.06	2.10	2.17	2.24	2.13	2.17	2.24	2.32	
Amps	10.1	10.2	10.4	10.7	10.6	10.7	10.9	11.2	11.1	11.3	11.5	11.8	11.6	11.8	12.0	12.3	12.0	12.2	12.5	12.8	12.5	12.7	13.0	13.3	
Hi PR	224	241	255	266	252	271	286	298	286	308	325	339	326	351	370	386	367	395	417	435	405	436	460	480	
Lo PR	111	118	129	138	117	125	136	145	122	130	142	151	128	136	149	159	134	143	156	166	139	148	161	172	
MBh	21.8	22.3	23.8	25.5	21.3	21.8	23.3	24.9	20.8	21.3	22.7	24.3	20.3	20.7	22.2	23.7	19.3	19.7	21.0	22.5	17.9	18.2	19.5	20.8	
S/T	0.86	0.81	0.66	0.49	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.76	0.57	
ΔT	23	22	19	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	18	15	
kW	1.63	1.66	1.71	1.76	1.74	1.78	1.83	1.89	1.84	1.88	1.94	2.00	1.93	1.97	2.04	2.10	2.01	2.05	2.12	2.19	2.08	2.12	2.19	2.26	
Amps	9.9	10.1	10.3	10.5	10.4	10.5	10.7	11.0	10.9	11.1	11.3	11.6	11.4	11.5	11.8	12.1	11.8	12.0	12.3	12.6	12.3	12.5	12.7	13.1	
Hi PR	217	234	247	258	244	263	277	289	278	299	315	329	316	340	359	375	356	383	404	422	393	423	447	466	
Lo PR	108	115	125	133	114	121	132	141	118	126	138	146	124	132	144	154	130	139	151	161	135	143	157	167	

85	MBh	24.8	25.2	26.4	28.2	24.2	24.7	25.8	27.6	23.6	24.1	25.2	26.9	23.0	23.5	24.6	26.2	21.9	22.3	23.4	24.9	20.3	20.7	21.6	23.1
	S/T	0.98	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.98	0.79	1.00	1.00	0.98	0.80
	ΔT	23	23	23	20	23	23	23	22	23	23	22	19	22	23	22	19	21	21	22	19	19	20	20	18
	kW	1.69	1.72	1.77	1.83	1.81	1.85	1.90	1.96	1.92	1.96	2.02	2.08	2.01	2.05	2.12	2.19	2.09	2.14	2.21	2.28	2.16	2.21	2.28	2.35
	Amps	10.2	10.3	10.5	10.8	10.7	10.8	11.1	11.3	11.2	11.4	11.6	11.9	11.7	11.9	12.1	12.4	12.2	12.4	12.6	13.0	12.7	12.9	13.1	13.5
	Hi PR	229	246	260	271	257	276	292	304	292	314	332	346	332	358	378	394	374	402	425	443	413	445	470	490
	Lo PR	113	121	132	140	120	127	139	148	125	132	145	154	131	139	152	162	137	146	159	170	142	151	165	175
	MBh	24.0	24.5	25.7	27.4	23.5	23.9	25.1	26.8	22.9	23.4	24.5	26.1	22.4	22.8	23.9	25.5	21.2	21.7	22.7	24.2	19.7	20.1	21.0	22.4
	S/T	0.94	0.91	0.82	0.66	0.97	0.94	0.85	0.69	1.00	0.96	0.87	0.71	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76
	ΔT	24	24	23	20	25	24	23	20	25	24	23	20	24	25	23	20	23	23	23	20	21	22	21	18
kW	1.67	1.71	1.76	1.81	1.80	1.83	1.89	1.95	1.90	1.94	2.00	2.06	2.00	2.04	2.10	2.17	2.08	2.12	2.19	2.26	2.15	2.19	2.26	2.33	
Amps	10.2	10.3	10.5	10.7	10.6	10.8	11.0	11.2	11.2	11.3	11.6	11.8	11.6	11.8	12.1	12.4	12.1	12.3	12.6	12.9	12.6	12.8	13.1	13.4	
Hi PR	226	244	257	268	254	273	289	301	289	311	328	343	329	354	374	390	370	399	421	439	409	440	465	485	
Lo PR	112	119	130	139	119	126	138	147	123	131	143	153	130	138	150	160	136	144	158	168	140	149	163	174	
MBh	22.2	22.6	23.7	25.3	21.7	22.1	23.1	24.7	21.2	21.6	22.6	24.1	20.6	21.0	22.0	23.5	19.6	20.0	20.9	22.3	18.2	18.5	19.4	20.7	
S/T	0.91	0.87	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.87	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.91	0.73	
ΔT	ΔT	24	23	20	25	25	23	20	25	25	23	20	25	25	24	20	24	25	23	20	22	23	22	19	
kW	1.64	1.67	1.72	1.77	1.75	1.79	1.84	1.90	1.86	1.90	1.95	2.02	1.95	1.99	2.05	2.12	2.03	2.07	2.13	2.20	2.09	2.14	2.21	2.28	
Amps	10.0	10.1	10.3	10.5	10.5	10.6	10.8	11.0	11.0	11.1	11.4	11.6	11.4	11.6	11.9	12.1	11.9	12.1	12.3	12.6	12.3	12.5	12.8	13.1	
Hi PR	220	236	250	260	246	265	280	292	280	302	319	332	319	344	363	378	359	387	408	426	397	427	451	470	
Lo PR	109	116	127	135	115	122	134	142	120	127	139	148	126	134	146	155	132	140	153	163	136	145	158	168	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSZ140301A* / CA* F3642* 6A* +TXV / MBR1600** -1

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1181	MBh	28.2	29.3	32.0	-	27.6	28.6	31.3	-	26.9	27.9	30.6	-	26.3	27.2	29.8	-	24.9	25.8	28.3	-	23.1	23.9	26.2	-	
		S/T	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.84	0.70	0.48	-	0.86	0.72	0.50	-	0.90	0.75	0.52	-	0.90	0.75	0.52	-	
		ΔT	17	15	11	-	17	15	11	-	18	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-	
	1050	kW	1.99	2.03	2.09	-	2.13	2.18	2.24	-	2.26	2.30	2.37	-	2.37	2.42	2.49	-	2.46	2.51	2.59	-	2.54	2.59	2.67	-	
		Amps	2.3	2.5	2.7	-	2.9	3.0	3.3	-	3.5	3.7	4.0	-	4.1	4.3	4.6	-	4.6	4.8	5.1	-	5.1	5.4	5.7	-	
		Hi PR	221	237	251	-	247	266	281	-	281	303	320	-	321	345	364	-	361	388	410	-	398	429	453	-	
	919	Lo PR	112	119	130	-	118	126	137	-	123	131	143	-	129	137	150	-	135	144	157	-	140	149	162	-	
		MBh	27.4	28.4	31.1	-	26.8	27.7	30.4	-	26.1	27.1	29.7	-	25.5	26.4	28.9	-	24.2	25.1	27.5	-	22.4	23.2	25.5	-	
		S/T	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.86	0.72	0.50	-	
	75	1181	ΔT	18	16	12	-	18	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-
			kW	1.98	2.02	2.08	-	2.12	2.16	2.22	-	2.24	2.29	2.36	-	2.35	2.40	2.47	-	2.44	2.49	2.57	-	2.52	2.57	2.65	-
			Amps	2.3	2.4	2.6	-	2.8	3.0	3.2	-	3.4	3.6	3.9	-	4.0	4.2	4.5	-	4.5	4.7	5.1	-	5.1	5.3	5.6	-
1050		Hi PR	218	235	248	-	245	264	278	-	279	300	317	-	317	342	361	-	357	384	406	-	394	425	448	-	
		Lo PR	111	118	129	-	117	124	136	-	122	129	141	-	128	136	148	-	134	142	155	-	138	147	161	-	
		MBh	25.3	26.2	28.7	-	24.7	25.6	28.1	-	24.1	25.0	27.4	-	23.5	24.4	26.7	-	22.3	23.2	25.4	-	20.7	21.5	23.5	-	
919		S/T	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-	
		ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
		kW	1.94	1.97	2.03	-	2.07	2.11	2.17	-	2.19	2.23	2.30	-	2.30	2.34	2.41	-	2.38	2.43	2.51	-	2.46	2.51	2.59	-	
75		1181	Amps	2.1	2.2	2.4	-	2.6	2.8	3.0	-	3.2	3.4	3.7	-	3.7	3.9	4.2	-	4.3	4.5	4.8	-	4.8	5.0	5.3	-
			Hi PR	212	228	241	-	238	256	270	-	270	291	307	-	308	331	350	-	346	373	394	-	383	412	435	-
			Lo PR	107	114	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	134	143	156	-
	1050	MBh	28.7	29.5	32.0	34.3	28.0	28.9	31.2	33.5	27.4	28.2	30.5	32.7	26.7	27.5	29.8	31.9	25.4	26.1	28.3	30.3	23.5	24.2	26.2	28.1	
		S/T	0.89	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.66	0.43	1.00	0.91	0.69	0.44	1.00	0.92	0.69	0.45	
		ΔT	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	19	15	10	18	17	14	10	
	919	kW	2.01	2.05	2.11	2.17	2.15	2.19	2.26	2.33	2.28	2.32	2.39	2.47	2.39	2.44	2.51	2.59	2.48	2.53	2.61	2.69	2.56	2.61	2.70	2.78	
		Amps	2.4	2.5	2.8	3.0	2.9	3.1	3.4	3.7	3.6	3.8	4.0	4.4	4.1	4.3	4.6	5.0	4.7	4.9	5.2	5.6	5.2	5.5	5.8	6.2	
		Hi PR	223	240	253	264	250	269	284	296	284	306	323	337	324	348	368	384	364	392	414	432	402	433	457	477	
	75	1050	Lo PR	113	120	131	140	119	127	139	148	124	132	144	153	130	139	151	161	137	145	159	169	141	150	164	175
			MBh	27.9	28.7	31.1	33.3	27.2	28.0	30.3	32.6	26.6	27.4	29.6	31.8	25.9	26.7	28.9	31.0	24.6	25.4	27.4	29.5	22.8	23.5	25.4	27.3
			S/T	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.66	0.43
919		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	20	16	11	21	19	16	11	20	18	15	10	
		kW	1.99	2.03	2.09	2.15	2.14	2.18	2.24	2.31	2.26	2.30	2.37	2.45	2.37	2.42	2.49	2.57	2.46	2.51	2.59	2.67	2.54	2.59	2.67	2.76	
		Amps	2.3	2.5	2.7	3.0	2.9	3.0	3.3	3.6	3.5	3.7	4.0	4.3	4.1	4.3	4.6	4.9	4.6	4.8	5.1	5.5	5.1	5.4	5.7	6.1	
919		Hi PR	221	237	251	261	248	266	281	293	281	303	320	334	321	345	364	380	361	388	410	427	399	429	453	472	
		Lo PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	162	173	
		MBh	25.7	26.5	28.7	30.8	25.1	25.9	28.0	30.0	24.5	25.2	27.3	29.3	23.9	24.6	26.7	28.6	22.7	23.4	25.3	27.2	21.1	21.7	23.5	25.2	
919		S/T	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.94	0.84	0.64	0.41	
		ΔT	21	19	16	11	21	20	16	11	22	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10	
		kW	1.95	1.99	2.05	2.11	2.09	2.13	2.19	2.26	2.21	2.25	2.32	2.39	2.31	2.36	2.43	2.51	2.40	2.45	2.53	2.61	2.48	2.53	2.61	2.69	
919	Amps	2.1	2.3	2.5	2.8	2.7	2.8	3.1	3.4	3.3	3.5	3.7	4.0	3.8	4.0	4.3	4.6	4.4	4.6	4.9	5.2	4.9	5.1	5.4	5.8		
	Hi PR	214	230	243	254	240	258	273	285	273	294	310	324	311	335	353	369	350	376	398	415	387	416	439	458		
	Lo PR	109	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168		

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSZ140301A* / CA* F3642* 6A* +TXV / MBR1600** -1 (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	29.2	29.8	31.9	34.1	28.5	29.2	31.1	33.3	27.9	28.5	30.4	32.5	27.2	27.8	29.7	31.7	25.8	26.4	28.2	30.1	23.9	24.4	26.1	27.9
	S/T	1.00	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	1.00	0.80	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.85	0.64	1.00	1.00	0.86	0.64
	ΔT	23	21	19	15	22	22	19	15	21	22	19	15	21	22	19	15	20	21	19	15	19	19	17	14
	kW	2.02	2.06	2.12	2.19	2.17	2.21	2.28	2.35	2.29	2.34	2.41	2.49	2.40	2.45	2.53	2.61	2.50	2.55	2.63	2.71	2.58	2.64	2.72	2.80
	Amps	2.4	2.6	2.8	3.1	3.0	3.2	3.4	3.7	3.7	3.9	4.1	4.5	4.2	4.4	4.7	5.1	4.8	5.0	5.3	5.7	5.3	5.6	5.9	6.3
	Hi PR	225	242	256	267	253	272	287	299	287	309	326	340	327	352	372	388	368	396	418	436	407	438	462	482
	Lo PR	114	121	133	141	121	128	140	149	125	133	146	155	132	140	153	163	138	147	160	171	143	152	166	177
	MBh	28.4	29.0	31.0	33.1	27.7	28.3	30.2	32.3	27.0	27.6	29.5	31.6	26.4	27.0	28.8	30.8	25.1	25.6	27.4	29.2	23.2	23.7	25.3	27.1
	S/T	0.94	0.88	0.71	0.53	0.97	0.91	0.74	0.55	0.99	0.93	0.76	0.57	1.00	0.96	0.78	0.59	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61
	ΔT	23	22	19	15	24	23	20	16	24	23	20	16	23	23	20	16	22	22	19	16	20	21	18	15
	kW	2.01	2.05	2.11	2.17	2.15	2.19	2.26	2.33	2.28	2.32	2.39	2.47	2.39	2.44	2.51	2.59	2.48	2.53	2.61	2.69	2.56	2.61	2.70	2.78
	Amps	2.4	2.5	2.8	3.0	2.9	3.1	3.4	3.7	3.6	3.8	4.0	4.4	4.1	4.3	4.6	5.0	4.7	4.9	5.2	5.6	5.2	5.5	5.8	6.2
Hi PR	223	240	253	264	250	269	284	296	284	306	323	337	324	348	368	384	364	392	414	432	403	433	457	477	
Lo PR	113	120	131	140	119	127	139	148	124	132	144	154	130	139	151	161	137	145	159	169	141	150	164	175	
MBh	26.2	26.7	28.6	30.5	25.6	26.1	27.9	29.8	25.0	25.5	27.2	29.1	24.3	24.9	26.6	28.4	23.1	23.6	25.3	27.0	21.4	21.9	23.4	25.0	
S/T	0.90	0.85	0.69	0.51	0.93	0.88	0.71	0.53	0.96	0.90	0.73	0.55	0.99	0.93	0.75	0.56	1.03	0.96	0.78	0.59	1.04	0.97	0.79	0.59	
ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	18	15	
kW	1.97	2.00	2.06	2.12	2.10	2.14	2.21	2.27	2.22	2.27	2.34	2.41	2.33	2.38	2.45	2.53	2.42	2.47	2.55	2.63	2.50	2.55	2.63	2.72	
Amps	2.2	2.4	2.6	2.8	2.7	2.9	3.2	3.4	3.4	3.5	3.8	4.1	3.9	4.1	4.4	4.7	4.4	4.7	5.0	5.3	5.0	5.2	5.5	5.9	
Hi PR	216	233	246	256	243	261	276	287	276	297	313	327	314	338	357	372	353	380	402	419	390	420	444	463	
Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	126	135	147	156	133	141	154	164	137	146	159	170	
85	MBh	29.7	30.3	31.7	33.9	29.0	29.6	31.0	33.1	28.3	28.9	30.3	32.3	27.6	28.2	29.5	31.5	26.3	26.8	28.0	29.9	24.3	24.8	26.0	27.7
	S/T	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	1.00	0.83	1.00	1.00	1.00	0.83
	ΔT	23	23	22	19	23	23	22	19	22	22	22	19	22	22	23	20	20	21	22	19	19	19	20	18
	kW	2.04	2.08	2.14	2.20	2.18	2.23	2.29	2.36	2.31	2.36	2.43	2.50	2.42	2.47	2.55	2.63	2.52	2.57	2.65	2.74	2.60	2.66	2.74	2.83
	Amps	2.5	2.7	2.9	3.2	3.1	3.3	3.5	3.8	3.7	3.9	4.2	4.5	4.3	4.5	4.8	5.2	4.9	5.1	5.4	5.8	5.4	5.7	6.0	6.4
	Hi PR	227	245	258	269	255	274	290	302	290	312	330	344	330	356	375	392	372	400	422	440	411	442	467	487
	Lo PR	115	123	134	143	122	130	141	151	127	135	147	157	133	141	154	164	139	148	162	172	144	153	167	178
	MBh	28.9	29.4	30.8	32.9	28.2	28.7	30.1	32.1	27.5	28.0	29.4	31.3	26.8	27.4	28.7	30.6	25.5	26.0	27.2	29.0	23.6	24.1	25.2	26.9
	S/T	0.98	0.95	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.80
	ΔT	25	24	23	20	25	25	23	20	24	25	23	20	24	24	23	20	22	23	23	20	21	21	22	19
	kW	2.02	2.06	2.12	2.19	2.17	2.21	2.28	2.35	2.29	2.34	2.41	2.49	2.40	2.45	2.53	2.61	2.50	2.55	2.63	2.71	2.58	2.64	2.72	2.80
	Amps	2.4	2.6	2.8	3.1	3.0	3.2	3.4	3.7	3.7	3.9	4.1	4.5	4.2	4.4	4.7	5.1	4.8	5.0	5.3	5.7	5.3	5.6	5.9	6.3
Hi PR	225	242	256	267	253	272	287	299	287	309	326	340	327	352	372	388	368	396	418	436	407	438	462	482	
Lo PR	114	121	133	141	121	128	140	149	125	133	146	155	132	140	153	163	138	147	160	171	143	152	166	177	
MBh	26.6	27.1	28.4	30.3	26.0	26.5	27.8	29.6	25.4	25.9	27.1	28.9	24.8	25.3	26.4	28.2	23.5	24.0	25.1	26.8	21.8	22.2	23.3	24.8	
S/T	0.95	0.91	0.82	0.67	0.98	0.95	0.85	0.69	1.00	0.97	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.94	0.77	
ΔT	25	25	23	20	25	25	24	21	25	25	24	21	25	25	24	21	24	24	24	21	22	22	22	19	
kW	1.98	2.02	2.08	2.14	2.12	2.16	2.22	2.29	2.24	2.29	2.35	2.43	2.35	2.40	2.47	2.55	2.44	2.49	2.57	2.65	2.52	2.57	2.65	2.74	
Amps	2.3	2.4	2.6	2.9	2.8	3.0	3.2	3.5	3.4	3.6	3.9	4.2	4.0	4.2	4.5	4.8	4.5	4.7	5.0	5.4	5.1	5.3	5.6	6.0	
Hi PR	218	235	248	259	245	264	278	290	279	300	317	330	317	341	361	376	357	384	406	423	394	424	448	467	
Lo PR	111	118	129	137	117	124	136	145	122	129	141	150	128	136	148	158	134	142	155	166	138	147	161	171	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — SSS2140361B* / AR*F374316B*

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	30.7	31.9	34.9	-	30.0	31.1	34.1	-	29.3	30.4	33.3	-	28.6	29.6	32.5	-	27.2	28.2	30.8	-	25.2	26.1	28.6	-
	S/T	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-
	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	17	13	-	19	16	12	-	18	15	12	-
	kW	2.27	2.31	2.38	-	2.42	2.47	2.54	-	2.56	2.61	2.68	-	2.67	2.73	2.81	-	2.77	2.83	2.91	-	2.86	2.92	3.01	-
	Amps	8.3	8.4	8.7	-	8.9	9.1	9.3	-	9.6	9.8	10.1	-	10.2	10.4	10.7	-	10.8	11.0	11.4	-	11.4	11.6	12.0	-
	Hi PR	223	240	254	-	251	270	285	-	285	307	324	-	325	349	369	-	365	393	415	-	403	434	458	-
	Lo PR	108	115	126	-	114	122	133	-	119	126	138	-	125	133	145	-	131	139	152	-	135	144	157	-
	MBh	33.3	34.5	37.8	-	32.5	33.7	36.9	-	31.7	32.9	36.1	-	31.0	32.1	35.2	-	29.4	30.5	33.4	-	27.3	28.3	31.0	-
	S/T	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.86	0.71	0.49	-	0.86	0.72	0.50	-
	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-
	kW	2.32	2.36	2.43	-	2.48	2.52	2.59	-	2.61	2.66	2.74	-	2.74	2.79	2.87	-	2.84	2.90	2.98	-	2.93	2.99	3.08	-
	Amps	8.5	8.7	8.9	-	9.1	9.3	9.6	-	9.8	10.0	10.3	-	10.4	10.7	11.0	-	11.1	11.3	11.7	-	11.7	11.9	12.3	-
Hi PR	230	248	262	-	258	278	294	-	294	316	334	-	335	360	380	-	376	405	428	-	416	448	473	-	
Lo PR	111	119	129	-	118	125	137	-	122	130	142	-	129	137	149	-	135	143	156	-	139	148	162	-	
MBh	34.3	35.5	38.9	-	33.5	34.7	38.0	-	32.7	33.9	37.1	-	31.9	33.1	36.2	-	30.3	31.4	34.4	-	28.1	29.1	31.9	-	
S/T	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.84	0.70	0.48	-	0.86	0.72	0.50	-	0.90	0.75	0.52	-	0.90	0.76	0.52	-	
ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	15	12	-	17	14	11	-	
kW	2.34	2.38	2.45	-	2.49	2.54	2.61	-	2.63	2.68	2.76	-	2.76	2.81	2.89	-	2.86	2.92	3.00	-	2.95	3.01	3.10	-	
Amps	8.5	8.7	9.0	-	9.2	9.4	9.7	-	9.9	10.1	10.4	-	10.5	10.8	11.1	-	11.2	11.4	11.8	-	11.8	12.1	12.4	-	
Hi PR	233	250	264	-	261	281	296	-	297	319	337	-	338	364	384	-	380	409	432	-	420	452	477	-	
Lo PR	113	120	131	-	119	127	138	-	124	132	144	-	130	138	151	-	136	145	158	-	141	150	163	-	
75	MBh	31.3	32.2	34.8	37.4	30.5	31.4	34.0	36.5	29.8	30.7	33.2	35.6	29.1	29.9	32.4	34.8	27.6	28.4	30.8	33.0	25.6	26.3	28.5	30.6
	S/T	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.95	0.85	0.64	0.41
	ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	20	19	15	11
	kW	2.29	2.33	2.39	2.46	2.44	2.49	2.56	2.63	2.58	2.63	2.70	2.78	2.69	2.75	2.83	2.91	2.80	2.85	2.94	3.03	2.88	2.94	3.03	3.12
	Amps	8.3	8.5	8.8	9.1	8.9	9.1	9.4	9.7	9.6	9.9	10.2	10.5	10.3	10.5	10.8	11.2	10.9	11.1	11.5	11.9	11.5	11.7	12.1	12.5
	Hi PR	226	243	256	267	253	272	288	300	288	310	327	341	328	353	373	389	369	397	419	437	408	439	463	483
	Lo PR	109	116	127	135	115	123	134	143	120	128	139	148	126	134	146	156	132	140	153	163	137	145	159	169
	MBh	33.9	34.9	37.7	40.5	33.1	34.1	36.9	39.6	32.3	33.2	36.0	38.6	31.5	32.4	35.1	37.7	29.9	30.8	33.3	35.8	27.7	28.5	30.9	33.2
	S/T	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.39	0.91	0.81	0.61	0.40	0.94	0.84	0.63	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.66	0.43
	ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10
	kW	2.34	2.38	2.45	2.52	2.49	2.54	2.61	2.69	2.63	2.68	2.76	2.84	2.76	2.81	2.89	2.98	2.86	2.92	3.01	3.10	2.95	3.01	3.10	3.20
	Amps	8.5	8.7	9.0	9.3	9.2	9.4	9.7	10.0	9.9	10.1	10.4	10.8	10.5	10.8	11.1	11.5	11.2	11.4	11.8	12.2	11.8	12.1	12.4	12.9
Hi PR	233	250	264	276	261	281	297	309	297	319	337	352	338	364	384	401	380	409	432	451	420	452	477	498	
Lo PR	113	120	131	139	119	127	138	147	124	132	144	153	130	138	151	161	136	145	158	168	141	150	164	174	
MBh	34.9	35.9	38.9	41.7	34.1	35.1	38.0	40.7	33.3	34.2	37.1	39.8	32.4	33.4	36.2	38.8	30.8	31.7	34.4	36.9	28.6	29.4	31.8	34.2	
S/T	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.66	0.43	1.00	0.91	0.69	0.44	1.00	0.92	0.70	0.45	
ΔT	21	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	20	19	16	11	19	18	15	10	
kW	2.35	2.40	2.46	2.53	2.51	2.56	2.63	2.71	2.65	2.70	2.78	2.87	2.78	2.83	2.92	3.00	2.88	2.94	3.03	3.12	2.97	3.03	3.13	3.22	
Amps	8.6	8.8	9.1	9.4	9.2	9.4	9.7	10.1	10.0	10.2	10.5	10.9	10.6	10.9	11.2	11.6	11.3	11.5	11.9	12.3	11.9	12.2	12.5	13.0	
Hi PR	235	253	267	278	264	284	300	312	300	323	341	355	341	367	388	405	384	413	436	455	424	457	482	503	
Lo PR	114	121	132	141	120	128	140	149	125	133	145	154	131	140	152	162	137	146	160	170	142	151	165	176	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSZ140361B* / AR*F374316B* (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1090	MBh	31.8	32.5	34.7	37.1	31.1	31.7	33.9	36.3	30.3	31.0	33.1	35.4	29.6	30.2	32.3	34.5	28.1	28.7	30.7	32.8	26.0	26.6	28.4	30.4	
		S/T	0.90	0.85	0.69	0.52	0.94	0.88	0.71	0.53	0.96	0.90	0.73	0.55	0.99	0.93	0.76	0.57	1.03	0.96	0.78	0.59	1.04	0.97	0.79	0.59	
	1250	ΔT	24	23	20	16	25	24	20	16	25	24	20	16	25	24	21	16	24	23	20	16	23	22	19	15	
		kW	2.30	2.35	2.41	2.48	2.46	2.50	2.58	2.65	2.59	2.64	2.72	2.80	2.71	2.77	2.85	2.94	2.82	2.87	2.96	3.05	2.91	2.96	3.05	3.15	
	1400	Amps	8.4	8.6	8.8	9.1	9.0	9.2	9.5	9.8	9.7	9.9	10.3	10.6	10.3	10.6	10.9	11.3	11.0	11.2	11.6	12.0	11.6	11.8	12.2	12.7	
		Hi PR	228	245	259	270	256	275	291	303	291	313	330	345	331	356	376	393	373	401	423	442	412	443	468	488	
	85	1090	Lo PR	110	117	128	136	117	124	135	144	121	129	141	150	127	135	148	157	133	142	155	165	138	147	160	171
			MBh	34.5	35.2	37.6	40.2	33.7	34.4	36.8	39.3	32.9	33.6	35.9	38.4	32.1	32.8	35.0	37.4	30.5	31.1	33.3	35.5	28.2	28.8	30.8	32.9
		1250	S/T	0.94	0.88	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.96	0.78	0.59	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61
			ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	19	15	21	21	19	15
1400		kW	2.35	2.40	2.46	2.53	2.51	2.56	2.63	2.71	2.65	2.70	2.78	2.87	2.78	2.83	2.92	3.00	2.88	2.94	3.03	3.12	2.97	3.03	3.13	3.22	
		Amps	8.6	8.8	9.1	9.4	9.2	9.4	9.7	10.1	10.0	10.2	10.5	10.9	10.6	10.9	11.2	11.6	11.3	11.5	11.9	12.3	11.9	12.2	12.5	13.0	
85		1090	Hi PR	235	253	267	278	264	284	300	312	300	323	341	355	341	367	388	405	384	413	437	455	424	457	482	503
			Lo PR	114	121	132	141	120	128	140	149	125	133	145	154	131	140	152	162	137	146	160	170	142	151	165	176
		1250	MBh	35.5	36.3	38.8	41.4	34.7	35.4	37.9	40.5	33.8	34.6	37.0	39.5	33.0	33.7	36.1	38.5	31.4	32.1	34.2	36.6	29.1	29.7	31.7	33.9
			S/T	1.00	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	1.00	0.80	0.60	1.00	1.00	0.82	0.61	1.00	1.00	0.85	0.64	1.00	1.00	0.86	0.64
	1400	ΔT	23	22	19	15	23	22	19	15	22	23	19	15	22	22	19	16	21	21	19	15	19	19	18	14	
		kW	2.37	2.41	2.48	2.55	2.53	2.58	2.65	2.73	2.67	2.72	2.80	2.89	2.80	2.85	2.94	3.03	2.90	2.96	3.05	3.15	3.00	3.06	3.15	3.25	
	85	1090	Amps	8.7	8.9	9.1	9.4	9.3	9.5	9.8	10.2	10.1	10.3	10.6	11.0	10.7	11.0	11.3	11.7	11.4	11.6	12.0	12.4	12.0	12.3	12.7	13.1
			Hi PR	237	255	270	281	266	286	303	316	303	326	344	359	345	371	392	409	388	417	441	460	429	461	487	508
		1250	Lo PR	115	122	133	142	121	129	141	150	126	134	146	156	132	141	154	164	139	148	161	172	144	153	167	178
			MBh	32.4	33.0	34.6	36.9	31.6	32.2	33.8	36.0	30.9	31.5	32.9	35.1	30.1	30.7	32.1	34.3	28.6	29.2	30.5	32.6	26.5	27.0	28.3	30.2
1400		S/T	0.95	0.91	0.82	0.67	0.98	0.95	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77	
		ΔT	26	25	24	21	26	26	24	21	26	26	24	21	25	26	25	21	24	25	24	21	22	23	23	20	
85		1090	kW	2.32	2.36	2.43	2.50	2.48	2.52	2.59	2.67	2.61	2.66	2.74	2.82	2.73	2.79	2.87	2.96	2.84	2.90	2.98	3.07	2.93	2.99	3.08	3.17
			Amps	8.5	8.6	8.9	9.2	9.1	9.3	9.6	9.9	9.8	10.0	10.3	10.7	10.4	10.7	11.0	11.4	11.1	11.3	11.7	12.1	11.7	11.9	12.3	12.8
		1250	Hi PR	230	248	262	273	258	278	293	306	294	316	334	348	335	360	380	396	376	405	428	446	416	447	472	493
			Lo PR	111	119	129	138	118	125	137	146	122	130	142	151	129	137	149	159	135	143	156	167	139	148	162	172
	1400	MBh	35.1	35.7	37.4	39.9	34.3	34.9	36.6	39.0	33.4	34.1	35.7	38.1	32.6	33.3	34.8	37.2	31.0	31.6	33.1	35.3	28.7	29.3	30.6	32.7	
		S/T	0.98	0.95	0.85	0.69	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.80	
	85	1090	ΔT	25	25	24	20	25	25	24	21	25	25	24	21	24	24	24	21	23	23	24	20	21	22	22	19
			kW	2.37	2.41	2.48	2.55	2.53	2.58	2.65	2.73	2.67	2.72	2.80	2.89	2.80	2.85	2.94	3.03	2.90	2.96	3.05	3.15	3.00	3.06	3.15	3.25
		1250	Amps	8.7	8.9	9.1	9.4	9.3	9.5	9.8	10.2	10.1	10.3	10.6	11.0	10.7	11.0	11.3	11.7	11.4	11.6	12.0	12.4	12.0	12.3	12.7	13.1
			Hi PR	237	255	270	281	266	286	303	316	303	326	344	359	345	371	392	409	388	417	441	460	429	461	487	508
1400		Lo PR	115	122	133	142	121	129	141	150	126	134	146	156	132	141	154	164	139	148	161	172	144	153	167	178	
		MBh	36.1	36.8	38.6	41.1	35.3	36.0	37.7	40.2	34.4	35.1	36.8	39.2	33.6	34.2	35.9	38.3	31.9	32.5	34.1	36.4	29.6	30.1	31.6	33.7	
85		1090	S/T	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	1.00	0.83	1.00	1.00	1.00	0.83
			ΔT	24	24	23	20	23	24	23	20	23	23	23	20	22	22	23	20	21	21	22	20	19	20	21	18
		1250	kW	2.39	2.43	2.50	2.57	2.55	2.60	2.67	2.75	2.69	2.74	2.83	2.91	2.82	2.87	2.96	3.05	2.93	2.99	3.08	3.17	3.02	3.08	3.17	3.27
			Amps	8.7	8.9	9.2	9.5	9.4	9.6	9.9	10.2	10.2	10.4	10.7	11.1	10.8	11.0	11.4	11.8	11.5	11.7	12.1	12.5	12.1	12.4	12.8	13.2
	1400	Hi PR	240	258	272	284	269	289	306	319	306	329	348	362	348	375	396	413	392	422	445	464	433	466	492	513	
		Lo PR	116	123	135	144	123	130	142	152	127	136	148	158	134	142	155	166	140	149	163	173	145	154	168	179	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSZ140421A* / CA*F4860*6A* +TXV / MBR2000** -1

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	39.2	40.6	44.5	-	38.3	39.7	43.5	-	37.4	38.7	42.4	-	36.5	37.8	41.4	-	34.6	35.9	39.3	-	32.1	33.3	36.4	-
	S/T	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.88	0.74	0.51	-	0.89	0.74	0.51	-
	ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	15	12	-	17	14	11	-
	kW	2.65	2.71	2.78	-	2.84	2.90	2.98	-	3.01	3.07	3.16	-	3.15	3.22	3.31	-	3.28	3.34	3.45	-	3.38	3.45	3.56	-
	Amps	9.7	9.9	10.2	-	10.4	10.7	11.0	-	11.3	11.6	12.0	-	12.1	12.4	12.8	-	12.8	13.1	13.6	-	13.6	13.9	14.4	-
	Hi PR	218	234	247	-	244	263	277	-	278	299	315	-	316	340	359	-	356	383	404	-	393	423	447	-
	Lo PR	107	114	125	-	113	121	132	-	118	125	137	-	124	132	144	-	130	138	151	-	134	143	156	-
	MBh	38.1	39.4	43.2	-	37.2	38.5	42.2	-	36.3	37.6	41.2	-	35.4	36.7	40.2	-	33.6	34.9	38.2	-	31.2	32.3	35.4	-
	S/T	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.45	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-
	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-
	kW	2.63	2.69	2.76	-	2.82	2.88	2.96	-	2.98	3.04	3.14	-	3.13	3.19	3.29	-	3.25	3.32	3.42	-	3.36	3.43	3.53	-
	Amps	9.6	9.8	10.1	-	10.4	10.6	10.9	-	11.2	11.5	11.8	-	12.0	12.2	12.6	-	12.7	13.0	13.4	-	13.4	13.8	14.2	-
Hi PR	215	232	245	-	242	260	275	-	275	296	312	-	313	337	356	-	352	379	400	-	389	419	442	-	
Lo PR	106	113	123	-	112	120	130	-	117	124	136	-	123	130	142	-	129	137	149	-	133	141	154	-	
MBh	35.1	36.4	39.9	-	34.3	35.6	39.0	-	33.5	34.7	38.0	-	32.7	33.9	37.1	-	31.0	32.2	35.2	-	28.8	29.8	32.7	-	
S/T	0.71	0.59	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-	
ΔT	19	16	12	-	19	16	12	-	19	16	13	-	19	17	13	-	19	16	12	-	18	15	12	-	
kW	2.58	2.63	2.70	-	2.76	2.81	2.89	-	2.92	2.97	3.06	-	3.06	3.12	3.21	-	3.17	3.24	3.34	-	3.28	3.35	3.45	-	
Amps	9.4	9.6	9.9	-	10.1	10.3	10.6	-	10.9	11.2	11.5	-	11.6	11.9	12.3	-	12.4	12.7	13.1	-	13.1	13.4	13.8	-	
Hi PR	209	225	237	-	234	252	266	-	267	287	303	-	304	327	345	-	342	368	388	-	377	406	429	-	
Lo PR	103	110	120	-	109	116	127	-	113	120	132	-	119	127	138	-	125	133	145	-	129	137	150	-	

75	MBh	39.9	41.0	44.4	47.7	38.9	40.1	43.4	46.6	38.0	39.1	42.4	45.5	37.1	38.2	41.3	44.4	35.2	36.3	39.3	42.1	32.6	33.6	36.4	39.0
	S/T	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.94	0.84	0.63	0.41	0.97	0.86	0.65	0.42	1.00	0.90	0.68	0.44	1.00	0.90	0.68	0.44
	ΔT	20	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10
	kW	2.67	2.73	2.80	2.89	2.86	2.92	3.01	3.10	3.03	3.09	3.18	3.28	3.18	3.24	3.34	3.45	3.30	3.37	3.47	3.58	3.41	3.48	3.59	3.70
	Amps	9.8	10.0	10.3	10.7	10.5	10.8	11.1	11.5	11.4	11.7	12.1	12.5	12.2	12.5	12.9	13.3	12.9	13.3	13.7	14.2	13.7	14.0	14.5	15.0
	Hi PR	220	236	250	260	247	265	280	292	280	302	319	332	319	344	363	379	359	387	408	426	397	427	451	471
	Lo PR	108	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168
	MBh	38.7	39.8	43.1	46.3	37.8	38.9	42.1	45.2	36.9	38.0	41.1	44.1	36.0	37.1	40.1	43.1	34.2	35.2	38.1	40.9	31.7	32.6	35.3	37.9
	S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.96	0.86	0.65	0.42	0.96	0.86	0.65	0.42
	ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10
	kW	2.65	2.71	2.78	2.87	2.84	2.90	2.98	3.07	3.01	3.07	3.16	3.26	3.15	3.22	3.32	3.42	3.28	3.34	3.45	3.56	3.38	3.45	3.56	3.68
	Amps	9.7	9.9	10.2	10.6	10.4	10.7	11.0	11.4	11.3	11.6	12.0	12.4	12.1	12.4	12.8	13.2	12.8	13.1	13.6	14.1	13.6	13.9	14.4	14.9
Hi PR	218	234	247	258	244	263	277	289	278	299	316	329	316	340	359	375	356	383	404	422	393	423	447	466	
Lo PR	107	114	125	133	113	121	132	140	118	125	137	146	124	132	144	153	130	138	151	161	134	143	156	166	
MBh	35.7	36.8	39.8	42.7	34.9	35.9	38.9	41.7	34.1	35.1	38.0	40.7	33.2	34.2	37.0	39.7	31.6	32.5	35.2	37.8	29.2	30.1	32.6	35.0	
S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40	
ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	20	19	15	11	
kW	2.60	2.65	2.72	2.80	2.78	2.83	2.92	3.00	2.94	3.00	3.09	3.18	3.08	3.14	3.24	3.34	3.20	3.27	3.37	3.47	3.30	3.37	3.48	3.59	
Amps	9.4	9.7	10.0	10.3	10.2	10.4	10.7	11.1	11.0	11.3	11.6	12.1	11.7	12.0	12.4	12.9	12.5	12.8	13.2	13.7	13.2	13.5	14.0	14.5	
Hi PR	211	227	240	250	237	255	269	281	269	290	306	319	307	330	349	364	345	371	392	409	381	410	433	452	
Lo PR	104	111	121	129	110	117	128	136	114	122	133	142	120	128	140	149	126	134	146	156	130	139	151	161	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. +fan)

EXPANDED COOLING DATA — SSZ140421A* / CA*F4860*6A* +TXV / MBR2000** -1 (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	1575	MBh	40.6	41.5	44.3	47.3	39.6	40.5	43.3	46.2	38.7	39.5	42.2	45.1	37.7	38.6	41.2	44.0	35.9	36.6	39.1	41.8	33.2	33.9	36.3	38.8
		S/T	0.97	0.91	0.74	0.55	1.00	0.94	0.76	0.57	1.00	0.96	0.78	0.59	1.00	1.00	0.81	0.60	1.00	1.00	0.84	0.63	1.00	1.00	0.85	0.63
	ΔT	23	22	19	15	23	22	19	15	22	23	19	15	22	23	19	16	21	21	19	15	19	20	18	14	
	kW	2.69	2.75	2.83	2.91	2.88	2.94	3.03	3.12	3.05	3.11	3.21	3.31	3.20	3.27	3.37	3.47	3.33	3.40	3.50	3.61	3.44	3.51	3.62	3.73	
	Amps	9.9	10.1	10.4	10.8	10.6	10.9	11.2	11.6	11.5	11.8	12.2	12.6	12.3	12.6	13.0	13.5	13.1	13.4	13.8	14.3	13.8	14.2	14.6	15.2	
	Hi PR	222	239	252	263	249	268	283	295	283	305	322	336	323	347	367	382	363	391	412	430	401	432	456	475	
	Lo PR	110	117	127	136	116	123	134	143	120	128	140	149	126	134	147	156	132	141	154	164	137	146	159	169	
	MBh	39.4	40.2	43.0	46.0	38.5	39.3	42.0	44.9	37.6	38.4	41.0	43.8	36.6	37.4	40.0	42.8	34.8	35.6	38.0	40.6	32.2	32.9	35.2	37.6	
	S/T	0.92	0.86	0.70	0.53	0.95	0.90	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.98	0.80	0.60	1.00	0.99	0.81	0.60	
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	23	23	20	16	21	21	19	15	
	kW	2.67	2.73	2.80	2.89	2.86	2.92	3.01	3.10	3.03	3.09	3.18	3.28	3.18	3.24	3.34	3.45	3.30	3.37	3.48	3.59	3.41	3.48	3.59	3.71	
	Amps	9.8	10.0	10.3	10.7	10.5	10.8	11.1	11.5	11.4	11.7	12.1	12.5	12.2	12.5	12.9	13.3	12.9	13.3	13.7	14.2	13.7	14.0	14.5	15.0	
Hi PR	220	237	250	260	247	265	280	292	280	302	319	332	319	344	363	379	359	387	408	426	397	427	451	471		
Lo PR	109	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168		
MBh	36.4	37.1	39.7	42.4	35.5	36.3	38.8	41.4	34.7	35.4	37.8	40.5	33.8	34.6	36.9	39.5	32.1	32.8	35.1	37.5	29.8	30.4	32.5	34.7		
S/T	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.53	0.94	0.89	0.72	0.54	0.97	0.91	0.74	0.56	1.01	0.95	0.77	0.58	1.02	0.96	0.78	0.58		
ΔT	24	23	20	16	25	24	20	16	25	24	20	16	25	24	21	16	24	23	20	16	23	22	19	15		
kW	2.61	2.67	2.74	2.82	2.80	2.85	2.94	3.03	2.96	3.02	3.11	3.21	3.10	3.17	3.26	3.36	3.22	3.29	3.39	3.50	3.33	3.40	3.50	3.62		
Amps	9.5	9.7	10.0	10.4	10.3	10.5	10.8	11.2	11.1	11.4	11.7	12.2	11.9	12.1	12.5	13.0	12.6	12.9	13.3	13.8	13.3	13.6	14.1	14.6		
Hi PR	213	229	242	253	239	257	272	284	272	293	309	322	310	333	352	367	349	375	396	413	385	414	438	456		
Lo PR	105	112	122	130	111	118	129	138	116	123	134	143	121	129	141	150	127	135	148	157	132	140	153	163		

85	1575	MBh	41.3	42.1	44.1	47.0	40.3	41.1	43.0	45.9	39.4	40.1	42.0	44.8	38.4	39.1	41.0	43.7	36.5	37.2	38.9	41.5	33.8	34.4	36.1	38.5
		S/T	1.00	0.98	0.88	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.78	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.78
	ΔT	24	24	23	20	24	24	23	20	23	23	23	20	22	23	23	20	21	22	23	20	20	20	20	18	
	kW	2.71	2.77	2.85	2.93	2.91	2.96	3.05	3.15	3.08	3.14	3.23	3.33	3.23	3.29	3.39	3.50	3.35	3.42	3.53	3.64	3.46	3.54	3.65	3.76	
	Amps	9.9	10.2	10.5	10.9	10.7	11.0	11.3	11.7	11.6	11.9	12.3	12.7	12.4	12.7	13.1	13.6	13.2	13.5	13.9	14.5	13.9	14.3	14.8	15.3	
	Hi PR	224	241	255	266	252	271	286	298	286	308	325	339	326	351	370	386	367	395	417	434	405	436	460	480	
	Lo PR	111	118	129	137	117	124	136	145	122	129	141	150	128	136	148	158	134	142	155	165	138	147	161	171	
	MBh	40.1	40.9	42.8	45.6	39.1	39.9	41.8	44.6	38.2	39.0	40.8	43.5	37.3	38.0	39.8	42.5	35.4	36.1	37.8	40.3	32.8	33.4	35.0	37.4	
	S/T	0.97	0.93	0.84	0.68	1.00	0.97	0.87	0.71	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.78	
	ΔT	25	25	24	20	26	25	24	21	25	25	24	21	24	25	24	21	24	24	24	21	22	22	22	19	
	kW	2.69	2.75	2.83	2.91	2.88	2.94	3.03	3.12	3.05	3.11	3.21	3.31	3.20	3.27	3.37	3.47	3.33	3.40	3.50	3.61	3.44	3.51	3.62	3.73	
	Amps	9.9	10.1	10.4	10.8	10.6	10.9	11.2	11.6	11.5	11.8	12.2	12.6	12.3	12.6	13.0	13.5	13.1	13.4	13.8	14.3	13.8	14.2	14.6	15.2	
Hi PR	222	239	252	263	249	268	283	295	283	305	322	336	323	347	367	382	363	391	412	430	401	432	456	475		
Lo PR	110	117	127	136	116	123	134	143	120	128	140	149	126	134	147	156	132	141	154	164	137	146	159	169		
MBh	37.0	37.7	39.5	42.1	36.1	36.8	38.6	41.2	35.3	36.0	37.7	40.2	34.4	35.1	36.7	39.2	32.7	33.3	34.9	37.2	30.3	30.9	32.3	34.5		
S/T	0.93	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.76		
ΔT	26	25	24	21	26	26	24	21	26	26	24	21	26	26	25	21	25	25	24	21	23	23	23	20		
kW	2.63	2.68	2.76	2.84	2.82	2.87	2.96	3.05	2.98	3.04	3.13	3.23	3.13	3.19	3.29	3.39	3.25	3.32	3.42	3.53	3.36	3.43	3.53	3.64		
Amps	9.6	9.8	10.1	10.5	10.3	10.6	10.9	11.3	11.2	11.5	11.8	12.3	12.0	12.2	12.6	13.1	12.7	13.0	13.4	13.9	13.4	13.8	14.2	14.7		
Hi PR	215	232	245	255	242	260	275	286	275	296	312	326	313	337	356	371	352	379	400	417	389	419	442	461		
Lo PR	106	113	123	131	112	119	130	139	117	124	136	144	123	130	142	152	128	137	149	159	133	141	154	164		

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. +fan)

EXPANDED COOLING DATA — SSZ140481A* / CA*F4860*6A* +TXV / MBR2000** -1

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	45.1	46.7	51.2	-	44.0	45.6	50.0	-	43.0	44.5	48.8	-	41.9	43.5	47.6	-	39.8	41.3	45.2	-	36.9	38.2	41.9	-
	S/T	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.84	0.70	0.48	-	0.87	0.73	0.50	-	0.88	0.73	0.51	-
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
	kW	2.98	3.04	3.13	-	3.19	3.26	3.36	-	3.38	3.45	3.56	-	3.55	3.62	3.73	-	3.69	3.77	3.88	-	3.81	3.89	4.01	-
	Amps	5.9	6.2	6.5	-	6.8	7.0	7.4	-	7.7	8.0	8.5	-	8.6	8.9	9.4	-	9.5	9.8	10.3	-	10.3	10.7	11.2	-
	Hi PR	217	233	247	-	243	262	277	-	277	298	315	-	315	339	358	-	355	382	403	-	392	422	445	-
	Lo PR	106	113	123	-	112	119	130	-	116	124	135	-	122	130	142	-	128	136	149	-	132	141	154	-
	MBh	43.8	45.4	49.7	-	42.7	44.3	48.5	-	41.7	43.2	47.4	-	40.7	42.2	46.2	-	38.7	40.1	43.9	-	35.8	37.1	40.7	-
	S/T	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.84	0.70	0.48	-
	ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	16	12	-	18	15	12	-
	kW	2.96	3.02	3.10	-	3.17	3.23	3.33	-	3.36	3.42	3.53	-	3.52	3.59	3.70	-	3.66	3.74	3.85	-	3.78	3.86	3.98	-
	Amps	5.8	6.1	6.4	-	6.7	6.9	7.3	-	7.6	7.9	8.4	-	8.5	8.8	9.3	-	9.3	9.7	10.2	-	10.2	10.5	11.0	-
Hi PR	215	231	244	-	241	259	274	-	274	295	311	-	312	336	355	-	351	378	399	-	388	418	441	-	
Lo PR	105	112	122	-	111	118	129	-	115	122	134	-	121	129	140	-	127	135	147	-	131	139	152	-	
MBh	40.4	41.9	45.9	-	39.5	40.9	44.8	-	38.5	39.9	43.7	-	37.6	38.9	42.7	-	35.7	37.0	40.5	-	33.1	34.3	37.5	-	
S/T	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-	
ΔT	19	17	13	-	19	17	13	-	19	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-	
kW	2.89	2.95	3.04	-	3.10	3.16	3.25	-	3.28	3.34	3.45	-	3.44	3.51	3.62	-	3.57	3.65	3.76	-	3.69	3.77	3.89	-	
Amps	5.5	5.8	6.1	-	6.3	6.6	7.0	-	7.3	7.6	8.0	-	8.1	8.4	8.9	-	8.9	9.3	9.7	-	9.7	10.1	10.6	-	
Hi PR	208	224	237	-	234	252	266	-	266	286	302	-	303	326	344	-	341	367	387	-	376	405	428	-	
Lo PR	102	108	118	-	107	114	125	-	112	119	130	-	117	125	136	-	123	131	143	-	127	135	148	-	

75	MBh	45.8	47.2	51.1	54.8	44.8	46.1	49.9	53.6	43.7	45.0	48.7	52.3	42.6	43.9	47.5	51.0	40.5	41.7	45.1	48.5	37.5	38.6	41.8	44.9
	S/T	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.99	0.88	0.67	0.43	1.00	0.89	0.67	0.43
	ΔT	21	19	16	11	21	20	16	11	21	20	16	11	21	20	16	11	21	19	16	11	20	18	15	10
	kW	3.00	3.06	3.15	3.25	3.22	3.28	3.38	3.49	3.41	3.48	3.58	3.70	3.58	3.65	3.76	3.88	3.72	3.80	3.92	4.04	3.84	3.92	4.05	4.18
	Amps	6.0	6.3	6.6	7.0	6.9	7.1	7.5	8.0	7.9	8.2	8.6	9.1	8.7	9.1	9.5	10.0	9.6	9.9	10.4	11.0	10.4	10.8	11.3	11.9
	Hi PR	219	236	249	260	246	265	279	291	280	301	318	331	319	343	362	378	358	386	407	425	396	426	450	469
	Lo PR	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	153	129	138	150	160	134	142	155	165
	MBh	44.5	45.8	49.6	53.2	43.5	44.8	48.4	52.0	42.4	43.7	47.3	50.8	41.4	42.6	46.1	49.5	39.3	40.5	43.8	47.0	36.4	37.5	40.6	43.6
	S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.59	0.38	0.91	0.81	0.61	0.40	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41
	ΔT	22	20	16	11	22	20	17	12	22	20	17	12	22	21	17	12	22	20	17	11	21	19	15	11
	kW	2.98	3.04	3.13	3.22	3.19	3.26	3.36	3.46	3.38	3.45	3.56	3.67	3.55	3.62	3.73	3.85	3.69	3.77	3.88	4.01	3.81	3.89	4.01	4.14
	Amps	5.9	6.2	6.5	6.9	6.8	7.0	7.4	7.9	7.7	8.1	8.5	9.0	8.6	8.9	9.4	9.9	9.5	9.8	10.3	10.9	10.3	10.7	11.2	11.8
Hi PR	217	233	247	257	243	262	277	289	277	298	315	328	315	339	358	374	355	382	403	421	392	422	445	465	
Lo PR	106	113	123	131	112	119	130	138	116	124	135	144	122	130	142	151	128	136	149	158	132	141	154	164	
MBh	41.1	42.3	45.8	49.1	40.1	41.3	44.7	48.0	39.2	40.3	43.7	46.8	38.2	39.3	42.6	45.7	36.3	37.4	40.5	43.4	33.6	34.6	37.5	40.2	
S/T	0.80	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.91	0.81	0.61	0.40	0.92	0.82	0.62	0.40	
ΔT	22	20	17	12	22	21	17	12	22	21	17	12	23	21	17	12	23	21	17	12	21	19	16	11	
kW	2.91	2.97	3.06	3.15	3.12	3.18	3.28	3.38	3.30	3.37	3.47	3.58	3.46	3.54	3.65	3.76	3.60	3.68	3.79	3.91	3.72	3.80	3.92	4.04	
Amps	5.6	5.9	6.2	6.6	6.4	6.7	7.1	7.5	7.4	7.7	8.1	8.6	8.2	8.6	9.0	9.5	9.1	9.4	9.9	10.4	9.9	10.2	10.7	11.3	
Hi PR	210	226	239	249	236	254	268	280	269	289	305	318	306	329	348	363	344	370	391	408	380	409	432	451	
Lo PR	103	109	119	127	109	115	126	134	113	120	131	140	118	126	138	147	124	132	144	154	128	137	149	159	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. +fan)

EXPANDED COOLING DATA — SSZ140481A* / CA*F4860*6A* +TXV / MBR2000** -1 (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	1744	MBh	46.7	47.7	50.9	54.4	45.6	46.6	49.7	53.2	44.5	45.5	48.6	51.9	43.4	44.3	47.4	50.6	41.2	42.1	45.0	48.1	38.2	39.0	41.7	44.6
		S/T	0.95	0.89	0.73	0.54	1.00	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.60	1.00	1.00	0.83	0.62	1.00	1.00	0.83	0.62
	ΔT	23	22	19	16	24	23	20	16	23	23	20	16	23	23	20	16	22	22	18	15	20	21	18	15	
	kW	3.03	3.08	3.18	3.27	3.24	3.31	3.41	3.51	3.43	3.51	3.61	3.73	3.60	3.68	3.79	3.91	3.75	3.83	3.95	4.07	3.87	3.95	4.08	4.21	
	Amps	6.1	6.4	6.7	7.1	7.0	7.3	7.6	8.1	8.0	8.3	8.7	9.2	8.8	9.2	9.6	10.2	9.7	10.1	10.6	11.2	10.6	11.0	11.5	12.1	
	Hi PR	221	238	252	262	248	267	282	294	282	304	321	335	322	346	366	381	362	390	411	429	400	430	454	474	
	Lo PR	108	115	125	134	114	121	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	
	MBh	45.3	46.3	49.5	52.9	44.2	45.2	48.3	51.6	43.2	44.1	47.2	50.4	42.1	43.1	46.0	49.2	40.0	40.9	43.7	46.7	37.1	37.9	40.5	43.3	
	S/T	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.96	0.90	0.74	0.55	0.99	0.93	0.76	0.57	1.00	0.97	0.79	0.59	1.00	0.98	0.79	0.59	
	ΔT	24	23	20	16	25	24	21	16	25	24	21	16	25	24	21	17	24	23	20	16	22	22	19	15	
kW	3.00	3.06	3.15	3.25	3.22	3.28	3.38	3.49	3.41	3.48	3.58	3.70	3.58	3.65	3.76	3.88	3.72	3.80	3.92	4.04	3.84	3.92	4.05	4.18		
Amps	6.0	6.3	6.6	7.0	6.9	7.1	7.5	8.0	7.9	8.2	8.6	9.1	8.7	9.1	9.5	10.1	9.6	9.9	10.4	11.0	10.4	10.8	11.3	11.9		
Hi PR	219	236	249	260	246	265	279	291	280	301	318	332	319	343	362	378	358	386	407	425	396	426	450	469		
Lo PR	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	153	129	138	150	160	134	142	155	165		
MBh	41.8	42.7	45.6	48.8	40.8	41.7	44.6	47.7	39.9	40.7	43.5	46.5	38.9	39.7	42.5	45.4	36.9	37.8	40.3	43.1	34.2	35.0	37.4	39.9		
S/T	0.87	0.82	0.67	0.50	0.91	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.93	0.76	0.57	1.00	0.94	0.77	0.57		
ΔT	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	23	22	19	16		
kW	2.94	2.99	3.08	3.17	3.14	3.21	3.30	3.40	3.33	3.40	3.50	3.61	3.49	3.56	3.67	3.79	3.63	3.71	3.82	3.94	3.75	3.83	3.95	4.08		
Amps	5.7	6.0	6.3	6.7	6.6	6.8	7.2	7.6	7.5	7.8	8.2	8.7	8.4	8.7	9.1	9.6	9.2	9.5	10.0	10.6	10.0	10.4	10.9	11.5		
Hi PR	213	229	242	252	239	257	271	283	271	292	308	322	309	333	351	366	348	374	395	412	384	413	436	455		
Lo PR	104	110	121	128	110	117	127	136	114	121	132	141	120	127	139	148	125	133	146	155	130	138	151	160		

85	1744	MBh	47.5	48.4	50.7	54.1	46.4	47.3	49.5	52.8	45.3	46.1	48.3	51.6	44.2	45.0	47.1	50.3	42.0	42.8	44.8	47.8	38.9	39.6	41.5	44.3
		S/T	1.00	0.96	0.87	0.70	1.00	1.00	0.90	0.73	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.99	0.80	1.00	1.00	1.00	0.81
	ΔT	25	25	23	20	24	25	23	20	24	24	24	20	23	24	24	20	22	23	23	20	20	21	22	19	
	kW	3.05	3.11	3.20	3.30	3.27	3.33	3.43	3.54	3.46	3.53	3.64	3.76	3.63	3.71	3.82	3.95	3.78	3.86	3.98	4.11	3.90	3.99	4.11	4.25	
	Amps	6.2	6.5	6.8	7.2	7.1	7.4	7.8	8.2	8.1	8.4	8.8	9.4	9.0	9.3	9.8	10.3	9.9	10.2	10.7	11.3	10.7	11.1	11.6	12.3	
	Hi PR	224	241	254	265	251	270	285	297	285	307	324	338	325	350	369	385	366	393	415	433	404	435	459	479	
	Lo PR	109	116	127	135	115	123	134	143	120	127	139	148	126	134	146	156	132	140	153	163	136	145	158	169	
	MBh	46.1	47.0	49.2	52.5	45.0	45.9	48.1	51.3	43.9	44.8	46.9	50.1	42.9	43.7	45.8	48.8	40.7	41.5	43.5	46.4	37.7	38.5	40.3	43.0	
	S/T	0.95	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77	
	ΔT	26	26	24	21	26	26	24	21	26	26	24	21	25	26	25	21	24	25	24	21	22	23	23	20	
kW	3.03	3.08	3.18	3.27	3.24	3.31	3.41	3.51	3.43	3.51	3.61	3.73	3.60	3.68	3.79	3.91	3.75	3.83	3.95	4.07	3.87	3.95	4.08	4.21		
Amps	6.1	6.4	6.7	7.1	7.0	7.3	7.6	8.1	8.0	8.3	8.7	9.2	8.8	9.2	9.6	10.2	9.7	10.1	10.6	11.2	10.6	11.0	11.5	12.1		
Hi PR	221	238	252	262	248	267	282	294	282	304	321	335	322	346	366	381	362	390	411	429	400	430	454	474		
Lo PR	108	115	125	134	114	121	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167		
MBh	42.5	43.4	45.4	48.5	41.5	42.4	44.4	47.3	40.6	41.3	43.3	46.2	39.6	40.3	42.2	45.1	37.6	38.3	40.1	42.8	34.8	35.5	37.2	39.7		
S/T	0.92	0.88	0.80	0.65	0.95	0.92	0.83	0.67	0.97	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.74		
ΔT	26	26	25	21	27	26	25	22	27	26	25	22	27	27	25	22	25	26	25	21	24	24	23	20		
kW	2.96	3.02	3.10	3.20	3.17	3.23	3.33	3.43	3.35	3.42	3.53	3.64	3.52	3.59	3.70	3.82	3.66	3.74	3.85	3.97	3.78	3.86	3.98	4.11		
Amps	5.8	6.1	6.4	6.8	6.7	6.9	7.3	7.8	7.6	7.9	8.3	8.8	8.5	8.8	9.2	9.8	9.3	9.7	10.1	10.7	10.2	10.5	11.0	11.6		
Hi PR	215	231	244	254	241	259	274	286	274	295	311	325	312	336	355	370	351	378	399	416	388	417	441	460		
Lo PR	105	111	122	130	111	118	129	137	115	122	134	142	121	129	140	150	127	135	147	157	131	139	152	162		

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — SSZ140601A* / CA*F4860*6A* +TXV / MBE2000** -1

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	55.4	57.4	62.9	-	54.1	56.1	61.4	-	52.8	54.7	59.9	-	51.5	53.4	58.5	-	48.9	50.7	55.6	-	45.3	47.0	51.5	-
	S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-
	kW	3.63	3.70	3.82	-	3.91	3.99	4.12	-	4.16	4.25	4.39	-	4.38	4.48	4.63	-	4.57	4.67	4.83	-	4.73	4.83	5.00	-
	Amps	7.6	7.9	8.4	-	8.7	9.1	9.6	-	10.0	10.4	10.9	-	11.1	11.5	12.1	-	12.2	12.7	13.3	-	13.3	13.8	14.5	-
	Hi PR	219	236	249	-	246	264	279	-	279	301	318	-	318	343	362	-	358	385	407	-	396	426	450	-
	Lo PR	103	110	120	-	109	116	126	-	113	120	131	-	119	126	138	-	125	132	145	-	129	137	150	-
	MBh	53.8	55.7	61.0	-	52.5	54.4	59.6	-	51.3	53.1	58.2	-	50.0	51.8	56.8	-	47.5	49.2	53.9	-	44.0	45.6	50.0	-
	S/T	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.81	0.68	0.47	-
	ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	16	13	-	18	15	12	-
kW	3.60	3.67	3.79	-	3.88	3.96	4.09	-	4.12	4.22	4.35	-	4.34	4.44	4.59	-	4.53	4.63	4.78	-	4.69	4.79	4.96	-	
Amps	7.4	7.8	8.2	-	8.6	8.9	9.4	-	9.8	10.2	10.8	-	11.0	11.4	12.0	-	12.1	12.5	13.1	-	13.2	13.6	14.3	-	
Hi PR	217	233	246	-	243	262	276	-	277	298	314	-	315	339	358	-	355	382	403	-	392	422	445	-	
Lo PR	102	108	118	-	108	115	125	-	112	119	130	-	118	125	137	-	123	131	143	-	128	136	148	-	
MBh	49.6	51.4	56.3	-	48.5	50.2	55.0	-	47.3	49.0	53.7	-	46.2	47.8	52.4	-	43.8	45.4	49.8	-	40.6	42.1	46.1	-	
S/T	0.68	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.78	0.65	0.45	-	
ΔT	19	17	13	-	19	17	13	-	19	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-	
kW	3.51	3.58	3.70	-	3.78	3.86	3.99	-	4.02	4.11	4.24	-	4.23	4.33	4.47	-	4.41	4.51	4.66	-	4.57	4.67	4.83	-	
Amps	7.1	7.4	7.8	-	8.2	8.5	9.0	-	9.4	9.8	10.3	-	10.5	10.9	11.5	-	11.6	12.0	12.6	-	12.6	13.1	13.7	-	
Hi PR	210	226	239	-	236	254	268	-	268	289	305	-	306	329	347	-	344	370	391	-	380	409	432	-	
Lo PR	99	105	115	-	105	111	121	-	109	116	126	-	114	121	133	-	120	127	139	-	124	132	144	-	

75	MBh	56.3	58.0	62.7	67.3	55.0	56.6	61.3	65.8	53.7	55.3	59.8	64.2	52.4	53.9	58.4	62.6	49.8	51.2	55.5	59.5	46.1	47.5	51.4	55.1
	S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42
	ΔT	21	19	16	11	21	20	16	11	21	20	16	11	21	20	16	11	21	19	16	11	20	18	15	10
	kW	3.66	3.73	3.85	3.98	3.94	4.03	4.16	4.30	4.19	4.29	4.43	4.58	4.42	4.52	4.67	4.82	4.61	4.71	4.87	5.03	4.77	4.88	5.04	5.22
	Amps	7.7	8.0	8.5	9.1	8.8	9.2	9.7	10.3	10.1	10.5	11.1	11.8	11.3	11.7	12.3	13.0	12.4	12.9	13.5	14.3	13.5	14.0	14.7	15.5
	Hi PR	221	238	251	262	248	267	282	294	282	304	321	335	322	346	365	381	362	389	411	429	400	430	454	474
	Lo PR	104	111	121	129	110	117	128	136	114	122	133	141	120	128	139	148	126	134	146	156	130	138	151	161
	MBh	54.7	56.3	60.9	65.4	53.4	55.0	59.5	63.9	52.1	53.7	58.1	62.3	50.9	52.4	56.7	60.8	48.3	49.7	53.8	57.8	44.7	46.1	49.9	53.5
	S/T	0.80	0.72	0.54	0.35	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.92	0.82	0.62	0.40	0.92	0.83	0.63	0.40
	ΔT	22	20	16	11	22	20	17	12	22	20	17	12	22	21	17	12	22	20	17	11	21	19	16	11
kW	3.63	3.70	3.82	3.95	3.91	3.99	4.12	4.26	4.16	4.25	4.39	4.54	4.38	4.48	4.63	4.78	4.57	4.67	4.83	4.99	4.73	4.84	5.00	5.17	
Amps	7.6	7.9	8.4	8.9	8.7	9.1	9.6	10.2	10.0	10.4	10.9	11.6	11.1	11.5	12.1	12.8	12.2	12.7	13.3	14.1	13.3	13.8	14.5	15.3	
Hi PR	219	236	249	260	246	265	279	291	280	301	318	331	318	343	362	377	358	385	407	425	396	426	450	469	
Lo PR	103	110	120	127	109	116	126	135	113	120	131	140	119	126	138	147	125	132	145	154	129	137	150	159	
MBh	50.5	51.9	56.2	60.3	49.3	50.7	54.9	58.9	48.1	49.5	53.6	57.5	46.9	48.3	52.3	56.1	44.6	45.9	49.7	53.3	41.3	42.5	46.0	49.4	
S/T	0.78	0.69	0.53	0.34	0.80	0.72	0.54	0.35	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.89	0.80	0.60	0.39	
ΔT	22	20	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	19	16	11	
kW	3.54	3.61	3.73	3.85	3.81	3.90	4.02	4.15	4.06	4.14	4.28	4.42	4.27	4.36	4.51	4.66	4.45	4.55	4.70	4.86	4.61	4.71	4.87	5.04	
Amps	7.2	7.5	8.0	8.5	8.3	8.6	9.1	9.7	9.5	9.9	10.5	11.1	10.6	11.0	11.6	12.3	11.7	12.2	12.8	13.5	12.8	13.3	13.9	14.7	
Hi PR	212	229	241	252	238	257	271	283	271	292	308	321	309	332	351	366	347	374	395	412	384	413	436	455	
Lo PR	100	106	116	124	106	112	123	131	110	117	127	136	115	123	134	143	121	129	140	149	125	133	145	155	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. +fan)

EXPANDED COOLING DATA — SSZ140601A* / CA*F4860*6A* +TXV / MBE2000** -1 (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
2081	MBh	57.3	58.6	62.6	66.9	56.0	57.2	61.1	65.3	54.6	55.8	59.6	63.8	53.3	54.5	58.2	62.2	50.6	51.7	55.3	59.1	46.9	47.9	51.2	54.7
	S/T	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	1.00	0.80	0.60	1.00	1.00	0.81	0.61
	ΔT	23	22	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	18	15	21	21	18	15
	kW	3.69	3.76	3.89	4.01	3.97	4.06	4.19	4.33	4.23	4.32	4.47	4.62	4.45	4.55	4.71	4.87	4.64	4.75	4.91	5.08	4.81	4.92	5.09	5.26
	Amps	7.8	8.2	8.6	9.2	9.0	9.3	9.9	10.5	10.3	10.7	11.3	11.9	11.4	11.9	12.5	13.2	12.6	13.0	13.7	14.5	13.7	14.2	14.9	15.7
	Hi PR	223	240	254	265	251	270	285	297	285	307	324	338	325	350	369	385	365	393	415	433	404	434	459	479
	Lo PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	148	157	131	140	153	163
	MBh	55.6	56.9	60.7	64.9	54.3	55.5	59.3	63.4	53.0	54.2	57.9	61.9	51.8	52.9	56.5	60.4	49.2	50.2	53.7	57.4	45.5	46.5	49.7	53.2
	S/T	0.88	0.83	0.67	0.50	0.91	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.95	0.77	0.58
	ΔT	24	23	20	16	25	24	21	16	25	24	21	16	25	24	21	17	24	24	20	16	23	22	19	15
1850	kW	3.66	3.73	3.85	3.98	3.94	4.03	4.16	4.30	4.19	4.29	4.43	4.58	4.42	4.52	4.67	4.82	4.61	4.71	4.87	5.03	4.77	4.88	5.04	5.22
	Amps	7.7	8.0	8.5	9.1	8.8	9.2	9.7	10.3	10.1	10.5	11.1	11.8	11.3	11.7	12.3	13.0	12.4	12.9	13.5	14.3	13.5	14.0	14.7	15.5
	Hi PR	221	238	251	262	248	267	282	294	282	304	321	335	322	346	365	381	362	389	411	429	400	430	454	474
	Lo PR	104	111	121	129	110	117	128	136	114	122	133	141	120	128	139	148	126	134	146	156	130	138	151	161
	MBh	51.4	52.5	56.1	59.9	50.2	51.3	54.8	58.5	49.0	50.0	53.5	57.1	47.8	48.8	52.1	55.7	45.4	46.4	49.5	53.0	42.0	43.0	45.9	49.1
	S/T	0.85	0.80	0.65	0.49	0.88	0.83	0.67	0.50	0.90	0.85	0.69	0.52	0.93	0.88	0.71	0.53	0.97	0.91	0.74	0.55	0.98	0.92	0.75	0.56
	ΔT	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	23	22	19	16
	kW	3.57	3.64	3.76	3.88	3.84	3.93	4.06	4.19	4.09	4.18	4.32	4.46	4.31	4.40	4.55	4.70	4.49	4.59	4.74	4.90	4.65	4.75	4.91	5.08
	Amps	7.3	7.6	8.1	8.6	8.4	8.8	9.3	9.9	9.7	10.1	10.6	11.3	10.8	11.2	11.8	12.5	11.9	12.3	13.0	13.7	13.0	13.4	14.1	14.9
	Hi PR	215	231	244	254	241	259	274	285	274	295	311	325	312	336	354	370	351	378	399	416	388	417	441	460
Lo PR	101	107	117	125	107	113	124	132	111	118	129	137	116	124	135	144	122	130	142	151	126	134	147	156	

2081	MBh	58.3	59.4	62.2	66.4	56.9	58.1	60.8	64.9	55.6	56.7	59.4	63.3	54.2	55.3	57.9	61.8	51.5	52.5	55.0	58.7	47.7	48.7	51.0	54.4
	S/T	0.97	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.79
	ΔT	25	25	23	20	25	25	24	20	25	25	24	20	24	24	24	21	23	23	23	20	21	21	22	19
	kW	3.72	3.80	3.92	4.05	4.01	4.09	4.23	4.37	4.26	4.36	4.50	4.66	4.49	4.59	4.75	4.91	4.68	4.79	4.95	5.12	4.85	4.96	5.13	5.31
	Amps	8.0	8.3	8.8	9.3	9.1	9.5	10.0	10.6	10.4	10.9	11.4	12.1	11.6	12.0	12.7	13.4	12.8	13.2	13.9	14.7	13.9	14.4	15.1	15.9
	Hi PR	226	243	256	268	253	273	288	300	288	310	327	341	328	353	373	389	369	397	419	437	408	439	463	483
	Lo PR	106	113	123	131	112	119	130	139	117	124	135	144	122	130	142	151	128	137	149	159	133	141	154	164
	MBh	56.6	57.7	60.4	64.5	55.3	56.4	59.0	63.0	54.0	55.0	57.6	61.5	52.7	53.7	56.2	60.0	50.0	51.0	53.4	57.0	46.3	47.2	49.5	52.8
	S/T	0.93	0.89	0.81	0.65	0.96	0.93	0.84	0.68	0.98	0.95	0.86	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.93	0.75
	ΔT	26	26	24	21	26	26	25	21	26	26	25	21	26	26	25	21	25	25	24	21	23	23	23	20
1850	kW	3.69	3.76	3.89	4.01	3.97	4.06	4.19	4.33	4.23	4.32	4.47	4.62	4.45	4.55	4.71	4.87	4.64	4.75	4.91	5.08	4.81	4.92	5.09	5.26
	Amps	7.8	8.2	8.6	9.2	9.0	9.3	9.9	10.5	10.3	10.7	11.3	11.9	11.4	11.9	12.5	13.2	12.6	13.0	13.7	14.5	13.7	14.2	14.9	15.7
	Hi PR	223	240	254	265	251	270	285	297	285	307	324	338	325	350	369	385	365	393	415	433	404	434	459	479
	Lo PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	148	157	131	140	153	163
	MBh	52.2	53.3	55.8	59.5	51.0	52.0	54.5	58.1	49.8	50.8	53.2	56.7	48.6	49.5	51.9	55.4	46.2	47.1	49.3	52.6	42.8	43.6	45.7	48.7
	S/T	0.89	0.86	0.78	0.63	0.92	0.89	0.81	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	0.99	0.89	0.72
	ΔT	26	26	25	21	27	26	25	22	27	26	25	22	27	27	25	22	26	26	26	23	24	24	23	20
	kW	3.60	3.67	3.79	3.91	3.88	3.96	4.09	4.22	4.12	4.21	4.35	4.50	4.34	4.44	4.59	4.74	4.53	4.63	4.78	4.95	4.69	4.79	4.95	5.12
	Amps	7.4	7.8	8.2	8.8	8.6	8.9	9.4	10.0	9.8	10.2	10.8	11.4	10.9	11.4	12.0	12.6	12.1	12.5	13.1	13.9	13.1	13.6	14.3	15.1
	Hi PR	217	233	246	257	243	262	276	288	277	298	314	328	315	339	358	373	354	381	403	420	392	421	445	464
Lo PR	102	108	118	126	108	115	125	133	112	119	130	138	118	125	137	145	123	131	143	152	127	136	148	158	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED HEATING DATA

SSZ140181A* / CA*F3131*6A*+TXV / MBR800**-1

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	22.6	21.4	20.2	18.8	18.0	17.4	16.2	14.9	12.8	11.8	10.9	10.3	9.9	8.9	7.9	6.9	5.9	4.8
ΔT	34.9	33.1	31.1	29.1	27.8	26.9	25.0	23.1	19.7	18.2	16.8	15.8	15.3	13.7	12.1	10.6	9.0	7.4
kW	1.56	1.53	1.50	1.47	1.45	1.44	1.41	1.38	1.39	1.36	1.32	1.31	1.29	1.26	1.23	1.20	1.17	1.14
Amps	7.0	6.5	6.1	5.7	5.5	5.4	5.1	4.9	4.7	4.5	4.2	4.1	4.1	3.9	3.6	3.4	3.2	2.9
COP	4.23	4.09	3.93	3.75	3.62	3.54	3.36	3.16	2.70	2.55	2.40	2.30	2.24	2.06	1.87	1.67	1.47	1.23
EER	14.5	14.0	13.4	12.8	12.4	12.1	11.5	10.8	9.2	8.7	8.2	7.9	7.6	7.0	6.4	5.7	5.0	4.2
Hi PR	385	369	355	339	331	325	312	300	287	274	263	257	252	243	234	224	216	208
Lo PR	149	138	129	118	112	108	99	88	80	71	62	58	56	47	41	34	30	24

SSZ140241A* / CA*F3636*6A*+TXV / MBR800**-1

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	30.2	28.6	26.9	25.1	24.0	23.3	21.6	19.9	17.9	16.6	15.2	14.4	13.9	12.4	11.0	9.6	8.2	6.7
ΔT	32.9	31.1	29.3	27.4	26.1	25.3	23.5	21.7	19.5	18.0	16.6	15.7	15.1	13.5	12.0	10.5	8.9	7.3
kW	2.08	2.04	2.00	1.96	1.94	1.92	1.89	1.85	1.87	1.82	1.78	1.76	1.74	1.70	1.66	1.62	1.58	1.54
Amps	8.1	7.9	7.7	7.5	7.4	7.3	7.2	7.1	7.0	6.9	6.8	6.7	6.7	6.6	6.5	6.3	6.2	6.1
COP	4.24	4.09	3.93	3.74	3.62	3.54	3.35	3.16	2.81	2.65	2.50	2.39	2.33	2.14	1.94	1.73	1.52	1.28
EER	14.5	14.0	13.4	12.8	12.4	12.1	11.4	10.8	9.6	9.1	8.5	8.2	7.9	7.3	6.6	5.9	5.2	4.4
Hi PR	373	358	344	329	321	315	303	290	278	266	255	249	245	235	226	217	209	202
Lo PR	143	133	124	114	108	104	95	85	77	68	60	56	54	46	39	33	29	23

SSZ140301A* / CA*F3642*6A*+TXV / MBR1600**-1

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	36.5	34.5	32.5	30.4	29.0	28.1	26.1	24.1	22.6	20.9	19.2	18.2	17.5	15.7	13.9	12.1	10.3	8.5
ΔT	32.1	30.4	28.6	26.8	25.6	24.8	23.0	21.2	19.9	18.4	17.0	16.0	15.4	13.8	12.3	10.7	9.1	7.5
kW	2.40	2.36	2.32	2.27	2.25	2.23	2.19	2.14	2.20	2.15	2.11	2.08	2.06	2.01	1.97	1.92	1.87	1.83
Amps	11.8	10.6	9.6	8.7	8.2	8.0	7.2	6.6	6.1	5.6	5.1	4.9	4.8	4.3	3.6	3.1	2.5	1.8
COP	4.44	4.28	4.10	3.91	3.78	3.69	3.50	3.29	3.01	2.84	2.67	2.55	2.48	2.28	2.07	1.85	1.62	1.36
EER	15.2	14.6	14.0	13.4	12.9	12.6	11.9	11.2	10.3	9.7	9.1	8.7	8.5	7.8	7.1	6.3	5.5	4.6
Hi PR	360	346	332	318	310	304	292	281	269	257	247	241	236	227	219	210	202	195
Lo PR	137	127	119	110	104	100	92	82	74	66	58	54	52	44	38	32	28	22

SSZ140361B*/AR*F374316B*

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	41.5	39.3	37.0	34.6	33.0	32.0	29.7	27.4	24.9	23.0	21.2	20.0	19.3	17.3	15.3	13.4	11.4	9.3
T/R	30.7	29.1	27.4	25.6	24.4	23.7	22.0	20.3	18.5	17.0	15.7	14.8	14.3	12.8	11.3	9.9	8.4	6.9
kW	2.96	2.90	2.85	2.79	2.76	2.74	2.69	2.64	2.93	2.86	2.80	2.76	2.74	2.68	2.61	2.55	2.49	2.43
Amps	11.9	11.1	10.4	9.8	9.5	9.3	8.9	8.4	8.1	7.8	7.5	7.3	7.2	6.9	6.5	6.1	5.7	5.2
COP	4.11	3.96	3.80	3.62	3.49	3.41	3.23	3.04	2.49	2.35	2.21	2.12	2.06	1.89	1.72	1.53	1.34	1.13
EER	14.0	13.5	13.0	12.4	11.9	11.7	11.0	10.4	8.5	8.0	7.6	7.2	7.0	6.5	5.9	5.2	4.6	3.8
HI PR	346	332	319	305	298	292	281	270	258	247	237	231	227	218	210	201	194	187
LO PR	141	131	123	113	107	102	94	84	76	68	59	55	53	45	39	33	29	22

High pressure is measured at the suction service valve (the larger valve).

Low pressure is measured at the gauge port connection.

Calculations are based on nominal CFM and 70°F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

kW = Total system power

EXPANDED HEATING DATA (CONT.)

SSZ140421A* / CA*F4860*6A*+TXV / MBR2000**-1

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	51.5	48.8	45.9	42.9	41.0	39.7	36.9	34.0	34.3	31.6	29.1	27.5	26.5	23.8	21.1	18.4	15.7	12.8
ΔT	34.1	32.3	30.4	28.4	27.1	26.3	24.4	22.5	22.7	20.9	19.3	18.2	17.5	15.7	13.9	12.1	10.4	8.5
kW	3.40	3.33	3.27	3.21	3.17	3.14	3.08	3.02	3.07	3.00	2.94	2.90	2.87	2.81	2.74	2.68	2.61	2.54
Amps	15.2	14.1	13.2	12.4	12.0	11.8	11.1	10.6	10.1	9.7	9.2	9.0	8.9	8.5	7.9	7.5	6.9	6.3
COP	4.44	4.28	4.11	3.92	3.79	3.70	3.50	3.30	3.26	3.08	2.90	2.78	2.70	2.48	2.25	2.01	1.76	1.48
EER	15.2	14.6	14.0	13.4	12.9	12.6	12.0	11.3	11.2	10.5	9.9	9.5	9.2	8.5	7.7	6.9	6.0	5.1
Hi PR	370	354	341	326	318	312	300	288	276	263	253	247	242	233	224	215	207	200
Lo PR	142	132	123	113	107	103	95	84	76	68	60	56	53	45	39	33	29	23

SSZ140481A* / CA*F4860*6A*+TXV / MBR2000**-1

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	57.8	54.7	51.5	48.2	46.0	44.6	41.4	38.2	36.6	33.8	31.1	29.4	28.3	25.4	22.5	19.6	16.8	13.7
ΔT	34.5	32.7	30.8	28.8	27.5	26.6	24.7	22.8	21.9	20.2	18.6	17.6	16.9	15.2	13.4	11.7	10.0	8.2
kW	3.98	3.90	3.83	3.75	3.71	3.68	3.60	3.53	3.65	3.57	3.49	3.44	3.41	3.32	3.24	3.16	3.08	3.00
Amps	19.4	17.6	16.1	14.8	14.1	13.7	12.7	11.7	11.0	10.3	9.5	9.2	9.0	8.3	7.4	6.6	5.7	4.6
COP	4.25	4.10	3.94	3.76	3.63	3.55	3.36	3.17	2.94	2.77	2.61	2.50	2.43	2.24	2.03	1.82	1.59	1.34
EER	14.5	14.0	13.5	12.8	12.4	12.1	11.5	10.8	10.0	9.5	8.9	8.5	8.3	7.6	6.9	6.2	5.4	4.6
Hi PR	408	391	376	359	351	344	331	318	304	291	279	272	267	257	247	237	229	221
Lo PR	136	126	118	109	103	99	91	81	73	65	57	53	51	43	37	32	28	22

SSZ140601A* / CA*F4860*6A*+TXV / MBE2000**-1

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	57.8	57.8	57.8	57.8	57.0	55.2	51.3	47.3	47.9	44.2	40.7	38.4	37.0	33.2	29.4	25.7	21.9	17.9
ΔT	35.9	33.9	32.0	29.9	28.5	27.6	25.7	23.7	24.0	22.1	20.4	19.2	18.5	16.6	14.7	12.8	11.0	9.0
kW	4.8	4.7	4.6	4.5	4.48	4.4	4.3	4.2	4.4	4.3	4.2	4.2	4.1	4.0	3.9	3.8	3.7	3.6
Amps	24.7	22.3	20.4	18.8	17.9	17.4	16.0	14.8	13.9	12.9	12.0	11.5	11.3	10.4	9.2	8.2	7.1	5.7
COP	4.3	4.2	4.0	3.8	3.7	3.6	3.5	3.3	3.2	3.0	2.8	2.7	2.6	2.4	2.2	2.0	1.7	1.5
EER	14.8	14.3	13.8	13.1	12.7	12.4	11.8	11.1	10.8	10.2	9.7	9.3	9.0	8.3	7.5	6.8	5.9	5.0
Hi PR	404	387	372	356	347	341	327	314	301	288	276	269	265	255	245	235	226	218
Lo PR	136	126	119	109	103	99	91	81	73	65	57	53	51	43	37	32	28	22

High pressure is measured at the suction service valve (the larger valve).

Low pressure is measured at the gauge port connection.

Calculations are based on nominal CFM and 70°F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

kW = Total system power

AHRI RATINGS

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
SSZ14 0181A*	AEPF183016C*+TXV		19,000	13,900	13.0	15.0	17,700	13,800	18,000	8.5	10,400	1492621
	AR*F193116B*+TXV		19,000	13,900	12.5	14.5	17,700	13,800	18,000	8.5	10,200	1492622
	AR*F193116C*+TXV		19,000	13,900	12.5	14.5	17,700	13,800	18,000	8.2	10,200	4261918
	ASPF183016B*+TXV		19,000	13,900	13.0	15.0	17,700	13,800	18,000	8.6	10,400	1492623
	ASPF183016C*+TXV		19,000	13,900	13.0	15.0	17,700	13,800	18,000	8.6	10,400	4248587
	ASPF183016D*+TXV		19,000	13,900	13.0	15.0	17,700	13,800	18,000	8.6	10,400	4149302
	ASPF183016E*+TXV		19,000	13,900	13.0	15.0	17,700	13,800	18,000	8.6	10,400	4248588
	AT*F193116A*+TXV		19,000	13,900	12.5	14.5	17,700	13,800	18,000	8.5	10,200	1483553
	AVPTC183014A*		19,000	13,900	13.0	15.0	17,700	13,800	18,000	8.5	10,400	4431292
	AWUF31XX16A*		19,000	13,900	12.5	14.5	17,700	13,800	18,000	8.3	10,000	3853246
	AWUF31XX16A*+TXV		18,000	13,100	12.7	15.0	16,700	13,000	18,000	8.3	10,000	3853245
	CA*F3131*6B*+EEP+TXV	MBE1200** -1A*	19,000	13,900	12.0	14.0	17,700	13,800	18,000	8.3	10,400	1346741
	CA*F3131*6B*+TXV	A*VC950453BXA*	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	4589652
	CA*F3131*6B*+TXV	G*E80703B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	3603256
	CA*F3131*6B*+TXV	G*VC950453BXA*	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	3599151
	CA*F3131*6B*+TXV	G*V950453B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	1346746
	CA*F3131*6B*+TXV	G*E80704B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	1346744
	CA*F3131*6B*+TXV	MBR0800** -1	18,000	13,100	12.0	14.0	16,700	13,000	18,000	8.1	10,200	1346743
	CA*F3131*6B*+TXV	MBE1200** -1A*	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	1346742
	CA*F3131*6C*+EEP+TXV		19,000	13,900	12.0	14.0	17,700	13,800	18,000	8.3	10,400	1401051
	CA*F3131*6C*+TXV	A*VC950453BXA*	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	4589653
	CA*F3131*6C*+TXV	MBVC1200** -1A*	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	3609926
	CA*F3131*6C*+TXV	G*E80703B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	3603264
	CA*F3131*6C*+TXV	G*VC950453BXA*	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	3599152
	CA*F3131*6C*+TXV	G*V950453B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	1401058
	CA*F3131*6C*+TXV	G*E80704B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	1401056
	CA*F3131*6C*+TXV	MBR0800** -1	18,000	13,100	12.0	14.0	16,700	13,000	18,000	8.1	10,200	1386246
	CA*F3131*6C*+TXV	MBE1200** -1A*	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	1386244
	CHPF2430B6B*+TXV	G*E80703B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	3603266
	CHPF2430B6B*+TXV	G*VC950453BXA*	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	3599150
	CHPF2430B6B*+TXV	MBE1200** -1A*	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	1347586
	CHPF2430B6B*+TXV	G*V950453B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	1330424
	CHPF2430B6C*+TXV	A*VC950453BXA*	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	4589654
	CHPF2430B6C*+TXV	G*E80703B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	3603288
	CHPF2430B6C*+TXV	G*VC950453BXA*	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	3599154
	CHPF2430B6C*+TXV	G*V950453B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	3300353
	CHPF2430B6C*+TXV	G*E80704B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	3300351
	CHPF2430B6C*+TXV	MBR0800** -1	18,000	13,100	12.0	14.0	16,700	13,000	18,000	8.1	10,200	3300350
	CSCF3036N6B*+TXV	A*VC950453BXA*	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	4589655
	CSCF3036N6B*+TXV	G*E80703B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	3603253
	CSCF3036N6B*+TXV	G*VC950453BXA*	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	3599149
	CSCF3036N6B*+TXV	G*V950453B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	1296659
	CSCF3036N6B*+TXV	G*E80704B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	1296657
	CT*F3131*6A*+EEP+TXV		19,000	13,900	12.0	14.0	17,700	13,800	18,000	8.3	10,400	1450085
	CT*F3131*6A*+TXV	MBVC1200** -1A*	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	3610092
	CT*F3131*6A*+TXV	G*E80703B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	3603278
	CT*F3131*6A*+TXV	G*VC950453BXA*	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	3599153
	CT*F3131*6A*+TXV	G*V950453B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	1450090
	CT*F3131*6A*+TXV	G*E80704B**	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	1450088
	CT*F3131*6A*+TXV	MBR0800** -1	18,000	13,100	12.0	14.0	16,700	13,000	18,000	8.1	10,200	1450087
CT*F3131*6A*+TXV	MBE1200** -1A*	18,000	13,100	12.5	15.0	16,700	13,000	18,000	8.1	10,200	1450086	

See Notes on Page 28.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
SSZ14 0241A*	AEPF183016C*+TXV		22,800	17,100	12.2	14.5	21,200	17,000	23,600	8.3	14,500	1492624
	AEPF303616C*+TXV		24,000	18,000	13.0	15.0	22,300	17,800	24,000	8.5	14,000	1443961
	AEPF313716A*+TXV		24,000	18,000	13.0	15.0	22,300	17,800	24,000	8.5	14,000	3305554
	AR*F193116B*+TXV		24,000	18,000	12.0	14.0	22,300	17,800	24,000	8.2	14,000	1492625
	ASPF183016B*+TXV		23,600	17,700	12.5	15.0	21,900	17,500	22,000	8.6	13,500	3464581
	ASPF183016C*+TXV		23,600	17,700	12.5	15.0	21,900	17,500	22,000	8.6	13,500	4248572
	ASPF183016D*+TXV		23,600	17,700	12.5	15.0	21,900	17,500	22,000	8.6	13,500	4149303
	ASPF183016E*+TXV		23,600	17,700	12.5	15.0	21,900	17,500	22,000	8.6	13,500	4248573
	ASPF303616B*+TXV		24,000	18,000	13.0	15.0	22,300	17,800	22,000	8.5	12,000	1443988
	ASPF313716A*+TXV		24,000	18,000	13.0	15.0	22,300	17,800	22,000	8.5	12,000	3305555
	ASPF313716C*+TXV		24,000	18,000	13.0	15.0	22,300	17,800	22,000	8.5	12,000	4355463
	ASPF313716D*+TXV		24,000	18,000	13.0	15.0	22,300	17,800	22,000	8.5	12,000	4149304
	ASPF313716E*+TXV		24,000	18,000	13.0	15.0	22,300	17,800	22,000	8.5	12,000	4355476
	AT*F193116A*+TXV		24,000	18,000	12.0	14.0	22,300	17,800	24,000	8.2	14,000	1483554
	AVPTC183014A*		22,800	17,100	12.2	14.5	21,200	17,000	23,600	8.3	14,500	4431297
	AVPTC313714A*		24,000	18,000	13.0	15.0	22,300	17,800	24,000	8.5	14,000	4431300
	AWUF31XX16A*		24,000	18,000	12.5	14.5	22,300	17,800	23,000	8.5	13,400	3853248
	AWUF31XX16A*+TXV		24,000	18,000	12.7	15.0	22,300	17,800	23,000	8.5	13,400	3853247
	AWUF32XX16A*		24,000	18,000	12.5	14.5	22,300	17,800	23,000	8.5	13,400	3853250
	AWUF32XX16A*+TXV		24,000	18,000	12.7	15.0	22,300	17,800	23,000	8.5	13,400	3853249
	CA*F3636*6B*+EEP+TXV	MBE1200**-.1A*	24,000	18,000	12.0	14.0	22,300	17,800	24,400	8.2	14,000	1346747
	CA*F3636*6B*+TXV	G*E80703B**	23,600	17,700	12.5	15.0	21,900	17,500	23,000	8.3	14,500	3603257
	CA*F3636*6B*+TXV	G*VC950704CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,000	8.3	14,500	3599231
	CA*F3636*6B*+TXV	G*VC950453BXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	3599184
	CA*F3636*6B*+TXV	G*VC90704CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	3599013
	CA*F3636*6B*+TXV	A*VC950704CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	3598995
	CA*F3636*6B*+TXV	A*VC90704CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	3598985
	CA*F3636*6B*+TXV	G*V90704C**	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	3055727
	CA*F3636*6B*+TXV	G*V950704C**	23,600	17,700	12.2	14.5	21,900	17,500	23,000	8.3	14,500	1464060
	CA*F3636*6B*+TXV	A*V90704C**	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	1444039
	CA*F3636*6B*+TXV	A*V90453B**	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	1430182
	CA*F3636*6B*+TXV	G*V950453B**	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	1347232
	CA*F3636*6B*+TXV	G*E80704B**	23,600	17,700	12.5	15.0	21,900	17,500	23,000	8.3	14,500	1346751
	CA*F3636*6B*+TXV	MBR0800**-.1	24,000	18,000	12.0	14.0	22,300	17,800	24,000	8.2	14,500	1346750
	CA*F3636*6B*+TXV	MBE1600**-.1A*	24,400	18,300	13.0	15.0	22,700	18,200	22,000	8.5	12,000	1346749
	CA*F3636*6B*+TXV	MBE1200**-.1A*	24,000	18,000	12.5	15.0	22,300	17,800	24,000	8.3	14,500	1346748
	CA*F3636*6C*+EEP+TXV		24,000	18,000	12.0	14.0	22,300	17,800	24,400	8.2	14,000	3422841
	CA*F3636*6C*+TXV	A*VC950453BXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	4589656
	CA*F3636*6C*+TXV	G*VC950714CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,000	8.2	14,500	4184894
	CA*F3636*6C*+TXV	A*VC950714CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.2	14,500	4184893
	CA*F3636*6C*+TXV	MBVC1600**-.1A*	24,400	18,300	13.0	15.0	22,700	18,200	22,000	8.5	12,000	3609933
	CA*F3636*6C*+TXV	MBVC1200**-.1A*	24,000	18,000	12.5	15.0	22,300	17,800	24,000	8.5	14,500	3609929
	CA*F3636*6C*+TXV	G*E80703B**	23,600	17,700	12.5	15.0	21,900	17,500	23,000	8.3	14,500	3603308
	CA*F3636*6C*+TXV	G*VC950704CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,000	8.3	14,500	3599232
	CA*F3636*6C*+TXV	G*VC950453BXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	3599185
	CA*F3636*6C*+TXV	G*VC90704CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	3599014
	CA*F3636*6C*+TXV	A*VC950704CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	3598996
	CA*F3636*6C*+TXV	A*VC90704CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	3598986
	CA*F3636*6C*+TXV	MBR0800**-.1	24,000	18,000	12.0	14.0	22,300	17,800	24,000	8.2	14,500	3422842

See Notes on Page 28.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
SS214 0241A* (cont.)	CA*F3636*6C*+TXV	G*V950704C**	23,600	17,700	12.2	14.5	21,900	17,500	23,000	8.3	14,500	3422771
	CA*F3636*6C*+TXV	G*V950453B**	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	3422770
	CA*F3636*6C*+TXV	G*V90704C**	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	3422769
	CA*F3636*6C*+TXV	G*E80704B**	23,600	17,700	12.5	15.0	21,900	17,500	23,000	8.3	14,500	3422768
	CA*F3636*6C*+TXV	A*V90704C**	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	3422767
	CA*F3636*6C*+TXV	A*V90453B**	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	3422766
	CA*F3636*6C*+TXV	MBE1600**-1B*	24,400	18,300	13.0	15.0	22,700	18,200	22,000	8.5	12,000	3422765
	CA*F3636*6C*+TXV	MBE1200**-1B*	24,000	18,000	12.5	15.0	22,300	17,800	24,000	8.5	14,500	3422764
	CA*F3636*6D*+EEP+TXV		24,000	18,000	12.0	14.0	22,300	17,800	24,400	8.0	14,000	4392840
	CA*F3636*6D*+TXV	A*VC950453BXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	4589657
	CA*F3636*6D*+TXV	G*VC950714CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,000	8.2	14,500	4392852
	CA*F3636*6D*+TXV	G*VC950704CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,000	8.3	14,500	4392851
	CA*F3636*6D*+TXV	G*VC950453BXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	4392850
	CA*F3636*6D*+TXV	G*VC90704CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	4392849
	CA*F3636*6D*+TXV	G*E80704B**	23,600	17,700	12.5	15.0	21,900	17,500	23,000	8.3	14,500	4392848
	CA*F3636*6D*+TXV	G*E80703B**	23,600	17,700	12.5	15.0	21,900	17,500	23,000	8.3	14,500	4392847
	CA*F3636*6D*+TXV	A*VC950714CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.2	14,500	4392846
	CA*F3636*6D*+TXV	A*VC950704CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	4392845
	CA*F3636*6D*+TXV	A*VC90704CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	4392844
	CA*F3636*6D*+TXV	MBVC1600**-1A*	24,400	18,300	13.0	15.0	22,700	18,200	22,000	8.5	12,000	4392843
	CA*F3636*6D*+TXV	MBVC1200**-1A*	24,000	18,000	12.5	15.0	22,300	17,800	24,000	8.5	14,500	4392842
	CA*F3636*6D*+TXV	MBR0800**-1	24,000	18,000	12.0	14.0	22,300	17,800	24,000	8.2	14,500	4392841
	CHPF3636B6B*	MBE1200**-1A*	24,000	18,000	12.5	15.0	22,300	17,800	24,000	8.5	14,500	1330425
	CHPF3636B6B*+EEP+TXV		24,000	18,000	12.0	14.0	22,300	17,800	24,400	8.2	14,000	1330361
	CHPF3636B6B*+TXV	G*E80703B**	24,000	18,000	12.5	15.0	22,300	17,800	24,000	8.3	14,500	3603263
	CHPF3636B6B*+TXV	G*VC950453BXA*	24,000	18,000	12.2	14.5	22,300	17,800	24,000	8.3	14,500	3599190
	CHPF3636B6B*+TXV	G*E80704B**	24,000	18,000	12.5	15.0	22,300	17,800	24,000	8.3	14,500	1347589
	CHPF3636B6B*+TXV	G*V950453B**	24,000	18,000	12.2	14.5	22,300	17,800	24,000	8.3	14,500	1330427
	CHPF3636B6C*+EEP+TXV		24,000	18,000	12.0	14.0	22,300	17,800	24,400	8.2	14,000	3300354
	CHPF3636B6C*+TXV	A*VC950453BXA*	24,000	18,000	12.2	14.5	22,300	17,800	24,000	8.3	14,500	4589658
	CHPF3636B6C*+TXV	MBVC1200**-1A*	24,000	18,000	12.5	15.0	22,300	17,800	24,000	8.3	14,500	3610008
	CHPF3636B6C*+TXV	G*E80703B**	24,000	18,000	12.5	15.0	22,300	17,800	24,000	8.3	14,500	3603298
	CHPF3636B6C*+TXV	G*VC950453BXA*	24,000	18,000	12.2	14.5	22,300	17,800	24,000	8.3	14,500	3599191
	CHPF3636B6C*+TXV	G*V950453B**	24,000	18,000	12.2	14.5	22,300	17,800	24,000	8.3	14,500	3300359
	CHPF3636B6C*+TXV	G*E80704B**	24,000	18,000	12.5	15.0	22,300	17,800	24,000	8.3	14,500	3300357
	CHPF3636B6C*+TXV	MBR0800**-1	24,000	18,000	12.0	14.0	22,300	17,800	24,000	8.2	14,500	3300356
	CHPF3636B6C*+TXV	MBE1200**-1B*	24,000	18,000	12.5	15.0	22,300	17,800	24,000	8.5	14,500	3300355
	CHPF3642C6C*+TXV	MBVC1600**-1A*	24,000	18,000	12.5	15.0	22,300	17,800	22,000	8.5	12,000	3610014
	CHPF3642C6C*+TXV	MBE1600**-1B*	24,000	18,000	12.5	15.0	22,300	17,800	22,000	8.5	12,000	3606067
	CHPF3743C6A*+TXV	G*VC950704CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	4589792
	CHPF3743C6A*+TXV	A*VC950704CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	4321106
	CHPF3743C6B*+TXV	G*VC950704CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	4589793
	CHPF3743C6B*+TXV	A*VC950704CXA*	23,600	17,700	12.2	14.5	21,900	17,500	23,600	8.3	14,500	4321107
	CSCF3036N6B*+TXV	A*VC950453BXA*	24,000	18,000	12.2	14.5	22,300	17,800	24,000	8.3	14,500	4589659
	CSCF3036N6B*+TXV	G*E80703B**	24,000	18,000	12.5	15.0	22,300	17,800	24,000	8.3	14,500	3603251
	CSCF3036N6B*+TXV	G*VC950453BXA*	24,000	18,000	12.2	14.5	22,300	17,800	24,000	8.3	14,500	3599189
	CSCF3036N6B*+TXV	G*V950453B**	24,000	18,000	12.2	14.5	22,300	17,800	24,000	8.3	14,500	1296662
	CSCF3036N6B*+TXV	G*E80704B**	24,000	18,000	12.5	15.0	22,300	17,800	24,000	8.3	14,500	1296660
	CT*F3636*6A*+TXV	MBVC1600**-1A*	24,400	18,300	13.0	15.0	22,700	18,200	22,000	8.5	12,000	3610100
	CT*F3636*6A*+TXV	MBVC1200**-1A*	24,000	18,000	12.5	15.0	22,300	17,800	24,000	8.3	14,500	3610097
	CT*F3636*6A*+TXV	G*E80703B**	23,600	17,700	12.5	15.0	21,900	17,500	23,000	8.3	14,500	3603276
	CT*F3636*6A*+TXV	G*E80704B**	23,600	17,700	12.5	15.0	21,900	17,500	23,000	8.3	14,500	1450094
CT*F3636*6A*+TXV	MBR0800**-1	24,000	18,000	12.0	14.0	22,300	17,800	24,000	8.2	14,500	1450093	
CT*F3636*6A*+TXV	MBE1600**-1A*	24,400	18,300	13.0	15.0	22,700	18,200	22,000	8.5	12,000	1450092	
CT*F3636*6A*+TXV	MBE1200**-1A*	24,000	18,000	12.5	15.0	22,300	17,800	24,000	8.3	14,500	1450091	

See Notes on Page 28.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #	
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW		
SSZ14 0301A*	AEPF303616C*+TXV		30,000	23,400	13.0	15.0	27,900	23,400	28,000	8.5	18,000	1443962	
	AEPF313716A*+TXV		30,000	23,400	13.0	15.0	27,900	23,400	28,000	8.6	18,000	3305556	
	AR*F193116B*+TXV		28,800	22,500	12.0	14.0	26,800	22,500	28,000	8.6	18,000	1492626	
	AR*F303016B*+TXV		27,000	21,100	11.0	13.5	25,100	21,100	23,000	8.3	18,000	1492627	
	AR*F303016C*+TXV		27,000	21,100	11.0	13.5	25,100	21,100	23,000	8.3	18,000	4248586	
	ASPF303616B*+TXV		30,000	23,400	13.0	15.0	27,900	23,400	28,000	8.5	18,000	1443989	
	ASPF313716A*+TXV		30,000	23,400	13.0	15.0	27,900	23,400	28,000	8.5	18,000	3305557	
	ASPF313716C*+TXV		30,000	23,400	13.0	15.0	27,900	23,400	28,000	8.6	18,000	4355464	
	ASPF313716D*+TXV		30,000	23,400	13.0	15.0	27,900	23,400	28,000	8.6	18,000	4149305	
	ASPF313716E*+TXV		30,000	23,400	13.0	15.0	27,900	23,400	28,000	8.6	18,000	4355477	
	AT*F193116A*+TXV		28,800	22,500	12.0	14.0	26,800	22,500	28,000	8.5	18,000	1483555	
	AT*F303016A*+TXV		27,000	21,100	11.0	13.5	25,100	21,100	23,000	8.3	18,000	1483556	
	AVPTC313714A*		30,000	23,400	13.0	15.0	27,900	23,400	28,000	8.6	18,000	4431303	
	AWUF31XX16A*		28,800	22,500	12.0	14.0	26,800	22,500	28,000	8.5	18,000	3853216	
	AWUF31XX16A*+TXV		28,800	22,500	12.3	14.5	26,800	22,500	28,000	8.5	18,000	3853251	
	AWUF32XX16A*		28,800	22,500	12.0	14.0	26,800	22,500	28,000	8.5	18,000	3853217	
	AWUF32XX16A*+TXV		28,800	22,500	12.3	14.5	26,800	22,500	28,000	8.5	18,000	3853252	
	CA*F3636*6B*+EEP+TXV	MBE1200** -1A*		28,800	22,500	12.0	14.0	26,800	22,500	28,000	8.5	18,000	1346753
	CA*F3636*6B*+TXV	G*VC950704CXA*		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	3599266
	CA*F3636*6B*+TXV	G*VC950453BXA*		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	3599207
	CA*F3636*6B*+TXV	G*V950704C**		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	1346756
	CA*F3636*6B*+TXV	G*V950453B**		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	1346755
	CA*F3636*6B*+TXV	MBE1200** -1A*		28,800	22,500	13.0	15.0	26,800	22,500	28,000	8.5	18,000	1346754
	CA*F3636*6C*+EEP+TXV			28,800	22,500	12.0	14.0	26,800	22,500	28,000	8.5	18,000	3422843
	CA*F3636*6C*+TXV	A*VC950704CXA*		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	4589661
	CA*F3636*6C*+TXV	A*VC950453BXA*		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	4589660
	CA*F3636*6C*+TXV	A*VC950714CXA*		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	4586513
	CA*F3636*6C*+TXV	G*VC950714CXA*		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	4184895
	CA*F3636*6C*+TXV	MBVC1200** -1A*		28,800	22,500	13.0	15.0	26,800	22,500	28,000	8.5	18,000	3609930
	CA*F3636*6C*+TXV	G*VC950704CXA*		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	3599270
	CA*F3636*6C*+TXV	G*VC950453BXA*		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	3599209
	CA*F3636*6C*+TXV	G*V950704C**		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	3422775
	CA*F3636*6C*+TXV	G*V950453B**		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	3422773
	CA*F3636*6C*+TXV	MBE1200** -1B*		28,800	22,500	13.0	15.0	26,800	22,500	28,000	8.5	18,000	3422772
	CA*F3636*6D*+EEP+TXV			28,800	22,500	12.0	14.0	26,800	22,500	28,000	8.3	18,000	4392853
	CA*F3636*6D*+TXV	A*VC90704CXA*		28,800	22,500	12.0	14.5	26,800	22,500	28,000	8.5	18,000	4594113
	CA*F3636*6D*+TXV	A*VC950704CXA*		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	4589663
	CA*F3636*6D*+TXV	A*VC950453BXA*		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	4589662
	CA*F3636*6D*+TXV	A*VC950714CXA*		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	4586514
	CA*F3636*6D*+TXV	G*VC90704CXA*		28,800	22,500	12.0	14.5	26,800	22,500	28,000	8.5	18,000	4579199
	CA*F3636*6D*+TXV	G*VC950714CXA*		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	4392857
	CA*F3636*6D*+TXV	G*VC950704CXA*		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	4392856
	CA*F3636*6D*+TXV	G*VC950453BXA*		28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	4392855
	CA*F3636*6D*+TXV	MBVC1200** -1A*		28,800	22,500	13.0	15.0	26,800	22,500	28,000	8.5	18,000	4392854
	CA*F3642*6C*+TXV	G*E80704B**		28,800	22,500	12.5	15.0	26,800	22,500	29,000	8.5	18,000	4185009
	CA*F3642*6C*+TXV	A*V80704B**		28,800	22,500	12.5	15.0	26,800	22,500	29,000	8.5	18,000	4185008
	CA*F3743*6A*+EEP+TXV			28,400	22,200	12.0	14.0	26,400	22,200	28,800	8.5	18,000	3000859
	CA*F3743*6A*+EEP+TXV			28,400	22,200	12.0	14.0	26,400	22,200	28,800	8.5	18,000	1401104
	CA*F3743*6A*+TXV	A*VC950704CXA*		28,800	22,500	12.0	14.5	26,800	22,500	28,000	8.5	18,000	4589664

See Notes on Page 28.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
	CA*F3743*6A*+TXV	A*VC950714CXA*	28,800	22,500	12.0	14.5	26,800	22,500	28,000	8.2	18,000	4586515
	CA*F3743*6A*+TXV	G*VC950714CXA*	28,800	22,500	12.0	14.5	26,800	22,500	28,000	8.2	18,000	4184896
	CA*F3743*6A*+TXV	MBVC1600**.-1A*	28,800	22,500	12.5	15.0	26,800	22,500	29,000	8.5	18,000	3609952
	CA*F3743*6A*+TXV	G*VC950704CXA*	28,800	22,500	12.0	14.5	26,800	22,500	28,000	8.5	18,000	3599271
	CA*F3743*6A*+TXV	MBR1600**.-1	28,800	22,500	12.0	14.0	26,800	22,500	29,000	8.5	18,000	3000861
	CA*F3743*6A*+TXV	MBE1600**.-1A*	28,800	22,500	12.5	15.0	26,800	22,500	29,000	8.5	18,000	3000860
	CA*F3743*6A*+TXV	G*V950704C**	28,800	22,500	12.0	14.5	26,800	22,500	28,000	8.5	18,000	1346763
	CA*F3743*6A*+TXV	G*E81155C**	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	1346760
	CA*F3743*6A*+TXV	G*E80905C**	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	1346759
	CA*F3743*6A*+TXV	MBR1600**.-1	28,800	22,500	12.0	14.0	26,800	22,500	29,000	8.5	18,000	1346758
	CA*F3743*6A*+TXV	MBE1600**.-1A*	28,800	22,500	12.5	15.0	26,800	22,500	29,000	8.5	18,000	1346757
	CA*F3743*6D*+EER+TXV		28,400	22,200	12.0	14.0	26,400	22,200	28,800	8.5	18,000	4415219
	CA*F3743*6D*+TXV	A*VC90704CXA*	28,800	22,500	12.0	14.5	26,800	22,500	28,000	8.5	18,000	4594114
	CA*F3743*6D*+TXV	A*VC950704CXA*	28,800	22,500	12.0	14.5	26,800	22,500	27,600	8.5	16,200	4589809
	CA*F3743*6D*+TXV	A*VC950714CXA*	28,800	22,500	12.0	14.5	26,800	22,500	27,800	8.2	18,000	4586516
	CA*F3743*6D*+TXV	G*VC90704CXA*	28,800	22,500	12.0	14.5	26,800	22,500	28,000	8.5	18,000	4579200
	CA*F3743*6D*+TXV	G*VC950714CXA*	28,800	22,500	12.0	14.5	26,800	22,500	27,800	8.2	18,000	4415244
	CA*F3743*6D*+TXV	G*VC950704CXA*	28,800	22,500	12.0	14.5	26,800	22,500	27,600	8.5	16,200	4415243
	CA*F3743*6D*+TXV	G*E81155C**	28,800	22,500	12.2	14.5	26,800	22,500	27,800	8.5	16,400	4415242
	CA*F3743*6D*+TXV	G*E80905C**	28,800	22,500	12.2	14.5	26,800	22,500	27,800	8.5	18,000	4415241
	CA*F3743*6D*+TXV	MBVC1600**.-1A*	28,800	22,500	12.5	15.0	26,800	22,500	27,400	8.5	18,000	4415240
	CHPF3642C6B*+TXV	G*E81155C**	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	1347593
	CHPF3642C6B*+TXV	G*E80905C**	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	1347591
SSZ14 0301A* (cont.)	CHPF3642C6C*+EER+TXV		28,800	22,500	12.0	14.0	26,800	22,500	28,000	8.5	18,000	3300360
	CHPF3642C6C*+TXV	A*VC90704CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	4594115
	CHPF3642C6C*+TXV	A*VC950704CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	4589665
	CHPF3642C6C*+TXV	A*VC950714CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.2	18,000	4586517
	CHPF3642C6C*+TXV	G*VC90704CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	4579201
	CHPF3642C6C*+TXV	G*VC950714CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.2	18,000	4184897
	CHPF3642C6C*+TXV	MBVC1600**.-1A*	28,800	22,500	12.5	15.0	26,800	22,500	29,000	8.5	18,000	3610015
	CHPF3642C6C*+TXV	G*VC950704CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	3599268
	CHPF3642C6C*+TXV	G*V950704C**	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	3300367
	CHPF3642C6C*+TXV	G*E81155C**	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	3300364
	CHPF3642C6C*+TXV	G*E80905C**	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	3300363
	CHPF3642C6C*+TXV	MBR1600**.-1	28,800	22,500	12.0	14.0	26,800	22,500	29,000	8.5	18,000	3300362
	CHPF3642C6C*+TXV	MBE1600**.-1B*	28,800	22,500	12.5	15.0	26,800	22,500	29,000	8.5	18,000	3300361
	CHPF3743C6A*+TXV	G*VC950704CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	3599265
	CHPF3743C6A*+TXV	G*V950704C**	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	1330430
	CHPF3743C6A*A*+TXV	MBR1600**.-1	28,800	22,500	12.0	14.0	26,800	22,500	29,000	8.5	18,000	1330364
	CHPF3743C6A*A*+TXV	MBE1600**.-1A*	28,800	22,500	12.5	15.0	26,800	22,500	29,000	8.5	18,000	1330363
	CHPF3743C6A+EER+TXV		28,800	22,500	12.0	14.0	26,800	22,500	28,000	8.5	18,000	1330362
	CHPF3743C6B*+EER+TXV		28,800	22,500	12.0	14.0	26,800	22,500	28,000	8.5	18,000	3300368
	CHPF3743C6B*+TXV	A*VC90704CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	4594116
	CHPF3743C6B*+TXV	A*VC950704CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	4589666
	CHPF3743C6B*+TXV	A*VC950714CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.2	18,000	4586518
	CHPF3743C6B*+TXV	G*VC90704CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	4579202
	CHPF3743C6B*+TXV	G*VC950714CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.2	18,000	4184898
	CHPF3743C6B*+TXV	MBVC1600**.-1A*	28,800	22,500	12.5	15.0	26,800	22,500	29,000	8.5	18,000	3610024
	CHPF3743C6B*+TXV	G*VC950704CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	3599269

See Notes on Page 28.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #	
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW		
SSZ14 0301A* (cont.)	CHPF3743C6B*+TXV	G*V950704C**	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	3300373	
	CHPF3743C6B*+TXV	MBR1600** -1	28,800	22,500	12.0	14.0	26,800	22,500	29,000	8.5	18,000	3300370	
	CHPF3743C6B*+TXV	MBE1600** -1B*	28,800	22,500	12.5	15.0	26,800	22,500	29,000	8.5	18,000	3300369	
	CSCF3642N6C*+TXV	A*VC90704CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	4594117	
	CSCF3642N6C*+TXV	A*VC950704CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	4589667	
	CSCF3642N6C*+TXV	A*VC950714CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.2	18,000	4586519	
	CSCF3642N6C*+TXV	G*VC90704CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	4579203	
	CSCF3642N6C*+TXV	G*VC950714CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.2	18,000	4184899	
	CSCF3642N6C*+TXV	G*VC950704CXA*	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	3599264	
	CSCF3642N6C*+TXV	G*V950704C**	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	1296607	
	CSCF3642N6C*+TXV	G*E81155C**	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	1296593	
	CSCF3642N6C*+TXV	G*E80905C**	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	1296592	
	CT*F3636*6A*+TXV	A*VC950714CXA*	28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	4586520	
	CT*F3636*6A*+TXV	G*VC950714CXA*	28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	4184900	
	CT*F3636*6A*+TXV	MBVC1200** -1A*	28,800	22,500	13.0	15.0	26,800	22,500	28,000	8.5	18,000	3610098	
	CT*F3636*6A*+TXV	G*VC950704CXA*	28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	3599267	
	CT*F3636*6A*+TXV	G*VC950453BXA*	28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	3599208	
	CT*F3636*6A*+TXV	G*V950704C**	28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	1450098	
	CT*F3636*6A*+TXV	G*V950453B**	28,800	22,500	12.0	15.0	26,800	22,500	28,000	8.5	18,000	1450097	
	CT*F3636*6A*+TXV	MBE1200** -1A*	28,800	22,500	13.0	15.0	26,800	22,500	28,000	8.5	18,000	1450096	
	CT*F3642*6A*+EEP+TXV		28,400	22,200	12.0	14.0	26,400	22,200	28,800	8.5	18,000	1450099	
	CT*F3642*6A*+TXV	MBVC1600** -1A*	28,800	22,500	12.5	15.0	26,800	22,500	29,000	8.5	18,000	3610114	
	CT*F3642*6A*+TXV	G*VC950704CXA*	28,800	22,500	12.0	14.5	26,800	22,500	28,000	8.5	18,000	3599272	
	CT*F3642*6A*+TXV	G*V950704C**	28,800	22,500	12.0	14.5	26,800	22,500	28,000	8.5	18,000	1450106	
	CT*F3642*6A*+TXV	G*E81155C**	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	1450103	
	CT*F3642*6A*+TXV	G*E80905C**	28,800	22,500	12.2	14.5	26,800	22,500	29,000	8.5	18,000	1450102	
	CT*F3642*6A*+TXV	MBR1600** -1	28,800	22,500	12.0	14.0	26,800	22,500	29,000	8.5	18,000	1450101	
	CT*F3642*6A*+TXV	MBE1600** -1A*	28,800	22,500	12.5	15.0	26,800	22,500	29,000	8.5	18,000	1450100	
	SSZ14 0361B*	AEPF313716A*		34,800	25,100	13.0	15.0	32,400	24,900	33,000	8.9	20,000	4260444
		AEPF313716A*+TXV		35,400	25,500	12.7	15.0	32,900	25,300	33,000	8.9	20,000	4260445
AEPF426016C*			35,400	25,500	13.0	15.0	32,900	25,300	33,400	9.0	20,000	4260446	
AEPF426016C*+TXV			35,400	25,500	13.0	15.0	32,900	25,300	33,400	9.0	20,000	4260447	
AR*F374316B*			35,000	25,200	12.0	14.0	32,600	25,100	33,400	8.7	20,000	4260448	
AR*F374316B*+TXV			35,000	25,200	12.0	14.0	32,600	25,100	33,000	8.7	20,000	4260449	
AR*F374316C*			35,000	25,200	12.0	14.0	32,600	25,100	33,400	8.7	20,000	4358383	
AR*F374316C*+TXV			35,000	25,200	12.0	14.0	32,600	25,100	33,000	8.7	20,000	4358384	
ASPF313716A*			35,000	25,200	12.5	15.0	32,600	25,100	33,000	9.0	20,000	4260450	
ASPF313716A*+TXV			35,000	25,200	12.5	15.0	32,600	25,100	33,000	9.0	20,000	4260451	
ASPF313716C*			35,000	25,200	12.5	15.0	32,600	25,100	33,000	9.0	20,000	4355467	
ASPF313716C*+TXV			35,000	25,200	12.5	15.0	32,600	25,100	33,000	9.0	20,000	4355468	
ASPF313716D*			35,000	25,200	12.5	15.0	32,600	25,100	33,000	9.0	20,000	4260452	
ASPF313716D*+TXV			35,000	25,200	12.5	15.0	32,600	25,100	33,000	9.0	20,000	4260453	
ASPF313716E*			35,000	25,200	12.5	15.0	32,600	25,100	33,000	9.0	20,000	4355480	
ASPF313716E*+TXV			35,000	25,200	12.5	15.0	32,600	25,100	33,000	9.0	20,000	4355481	
ASPF426016B*			35,400	25,500	13.0	15.0	32,900	25,300	33,000	9.0	20,000	4260454	
ASPF426016B*+TXV			35,400	25,500	13.0	15.0	32,900	25,300	33,000	9.0	20,000	4260455	
ASPF426016C*			35,400	25,500	13.0	15.0	32,900	25,300	33,000	9.0	20,000	4358385	
ASPF426016C*+TXV			35,400	25,500	13.0	15.0	32,900	25,300	33,000	9.0	20,000	4358386	
ASPF426016D*		35,400	25,500	13.0	15.0	32,900	25,300	33,000	9.0	20,000	4260456		

See Notes on Page 28.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #	
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW		
SSZ14 0361B* (cont.)	ASPF426016D*+TXV		35,400	25,500	13.0	15.0	32,900	25,300	33,000	9.0	20,000	4260457	
	ASPF426016E*		35,400	25,500	13.0	15.0	32,900	25,300	33,000	9.0	20,000	4358387	
	ASPF426016E*+TXV		35,400	25,500	13.0	15.0	32,900	25,300	33,000	9.0	20,000	4358388	
	AVPTC313714A*		34,800	25,100	13.0	15.0	32,400	24,900	33,000	8.9	20,000	4432057	
	AVPTC426014A*		35,400	25,500	13.0	15.0	32,900	25,300	33,400	9.0	20,000	4431309	
	CA*F4961*6A*	A*VC951155DXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4594122
	CA*F4961*6A*	A*VC950915DXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.7	20,000	4594121
	CA*F4961*6A*	A*VC950905DXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.9	20,000	4594120
	CA*F4961*6A*	A*VC950905CXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.7	20,000	4594119
	CA*F4961*6A*	A*VC90905DXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4594118
	CA*F4961*6A*	A*VC950714CXA*		34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4261879
	CA*F4961*6A*	G*E80905C**		34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4261878
	CA*F4961*6A*	G*E81155C**		34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4261877
	CA*F4961*6A*	MBVC2000**-.1A*		35,000	25,200	13.0	15.0	32,600	25,100	33,000	9.0	20,000	4260477
	CA*F4961*6A*	MBVC1600**-.1A*		35,000	25,200	12.2	14.5	32,600	25,100	33,000	9.0	20,000	4260475
	CA*F4961*6A*	MBR1600**-.1		34,600	24,900	12.0	14.0	32,200	24,800	33,400	8.5	20,000	4260473
	CA*F4961*6A*	MBE2000**-.1		35,000	25,200	13.0	15.0	32,600	25,100	33,000	9.0	20,000	4260471
	CA*F4961*6A*	MBE1600**-.1A*		35,000	25,200	12.2	14.5	32,600	25,100	33,400	8.8	20,000	4260469
	CA*F4961*6A*	G*VC950905CXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.7	20,000	4260466
	CA*F4961*6A*	G*VC950714CXA*		34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4260465
	CA*F4961*6A*	A*VC950704CXA*		34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4260464
	CA*F4961*6A*	G*VC950905DXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.9	20,000	4260463
	CA*F4961*6A*	G*VC950915DXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.7	20,000	4260462
	CA*F4961*6A*	G*VC90905DXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4260461
	CA*F4961*6A*	A*VC90704CXA*		34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4260460
	CA*F4961*6A*	G*VC951155DXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4260459
	CA*F4961*6A*	G*VC950704CXA*		34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4260458
	CA*F4961*6A*+EEP			34,800	25,100	12.0	14.0	32,400	24,900	33,400	8.5	20,000	4260467
	CA*F4961*6A*+EEP+TXV			35,000	25,200	12.0	14.0	32,600	25,100	33,400	8.5	20,000	4260468
	CA*F4961*6A*+TXV	A*VC951155DXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4594127
	CA*F4961*6A*+TXV	A*VC950915DXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4594126
	CA*F4961*6A*+TXV	A*VC950905DXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.9	20,000	4594125
	CA*F4961*6A*+TXV	A*VC950905CXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.7	20,000	4594124
	CA*F4961*6A*+TXV	A*VC90905DXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4594123
	CA*F4961*6A*+TXV	G*VC90704CXA*		34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4581678
	CA*F4961*6A*+TXV	G*E81155C**		34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4261883
	CA*F4961*6A*+TXV	G*E80905C**		34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4261882
	CA*F4961*6A*+TXV	G*E80704B**		34,000	24,500	12.0	14.5	31,600	24,300	33,000	8.8	20,000	4261881
	CA*F4961*6A*+TXV	A*VC950714CXA*		34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4261880
	CA*F4961*6A*+TXV	G*VC950915DXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4260487
	CA*F4961*6A*+TXV	G*VC950704CXA*		34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4260486
	CA*F4961*6A*+TXV	A*VC950704CXA*		34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4260485
	CA*F4961*6A*+TXV	G*VC950905DXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.9	20,000	4260484
	CA*F4961*6A*+TXV	G*VC950905CXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.7	20,000	4260483
	CA*F4961*6A*+TXV	G*VC950714CXA*		34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4260482
	CA*F4961*6A*+TXV	G*VC951155DXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4260481
	CA*F4961*6A*+TXV	A*VC90704CXA*		34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4260480
	CA*F4961*6A*+TXV	G*VC90905DXA*		35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4260479
	CA*F4961*6A*+TXV	MBVC2000**-.1*		35,000	25,200	13.0	15.0	32,600	25,100	33,000	9.0	20,000	4260478

See Notes on Page 28.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
SSZ14 0361B* (cont.)	CA*F4961*6A*+TXV	MBVC1600**-.1A*	35,000	25,200	12.2	14.5	32,600	25,100	33,000	9.0	20,000	4260476
	CA*F4961*6A*+TXV	MBR1600**-.1	34,600	24,900	12.0	14.0	32,200	24,800	33,400	8.5	20,000	4260474
	CA*F4961*6A*+TXV	MBE2000**-.1	35,000	25,200	13.0	15.0	32,600	25,100	33,000	9.0	20,000	4260472
	CA*F4961*6A*+TXV	MBE1600**-.1A*	35,000	25,200	12.2	14.5	32,600	25,100	33,400	8.8	20,000	4260470
	CA*F4961*6D*	A*VC951155DXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4594133
	CA*F4961*6D*	A*VC950915DXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.7	20,000	4594132
	CA*F4961*6D*	A*VC950905DXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.9	20,000	4594131
	CA*F4961*6D*	A*VC950905CXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.7	20,000	4594130
	CA*F4961*6D*	A*VC90905DXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4594129
	CA*F4961*6D*	MBVC2000**-.1A*	35,000	25,200	13.0	15.0	32,600	25,100	33,000	9.0	20,000	4431971
	CA*F4961*6D*	MBVC1600**-.1A*	35,000	25,200	12.2	14.5	32,600	25,100	33,000	9.0	20,000	4431969
	CA*F4961*6D*	MBR1600**-.1	34,600	24,900	12.0	14.0	32,200	24,800	33,400	8.5	20,000	4431967
	CA*F4961*6D*	G*VC951155DXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4431966
	CA*F4961*6D*	G*VC950915DXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.7	20,000	4431965
	CA*F4961*6D*	G*VC950905DXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.9	20,000	4431964
	CA*F4961*6D*	G*VC950905CXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.7	20,000	4431963
	CA*F4961*6D*	G*VC950714CXA*	34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4431962
	CA*F4961*6D*	G*VC950704CXA*	34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4431961
	CA*F4961*6D*	G*VC90905DXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4431960
	CA*F4961*6D*	G*E81155C**	34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4431959
	CA*F4961*6D*	G*E80905C**	34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4431958
	CA*F4961*6D*	A*VC950714CXA*	34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4431957
	CA*F4961*6D*	A*VC950704CXA*	34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4431956
	CA*F4961*6D*	A*VC90704CXA*	34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4431955
	CA*F4961*6D*+EEP		34,800	25,100	12.0	14.0	32,400	24,900	33,400	8.5	20,000	4431858
	CA*F4961*6D*+EEP+TXV		35,000	25,200	12.0	14.0	32,600	25,100	33,400	8.5	20,000	4431859
	CA*F4961*6D*+TXV	A*VC951155DXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4594138
	CA*F4961*6D*+TXV	A*VC950915DXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4594137
	CA*F4961*6D*+TXV	A*VC950905DXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.9	20,000	4594136
	CA*F4961*6D*+TXV	A*VC950905CXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.7	20,000	4594135
	CA*F4961*6D*+TXV	A*VC90905DXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4594134
	CA*F4961*6D*+TXV	G*VC90704CXA*	34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4581679
	CA*F4961*6D*+TXV	G*VC951155DXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4431985
	CA*F4961*6D*+TXV	G*VC950915DXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4431984
	CA*F4961*6D*+TXV	G*VC950905DXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.9	20,000	4431983
	CA*F4961*6D*+TXV	G*VC950905CXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.7	20,000	4431982
	CA*F4961*6D*+TXV	G*VC950714CXA*	34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4431981
	CA*F4961*6D*+TXV	G*VC950704CXA*	34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4431980
	CA*F4961*6D*+TXV	G*VC90905DXA*	35,000	25,200	12.5	15.0	32,600	25,100	33,400	8.8	20,000	4431979
	CA*F4961*6D*+TXV	G*E81155C**	34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4431978
	CA*F4961*6D*+TXV	G*E80905C**	34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4431977
	CA*F4961*6D*+TXV	G*E80704B**	34,000	24,500	12.0	14.5	31,600	24,300	33,000	8.8	20,000	4431976
CA*F4961*6D*+TXV	A*VC950714CXA*	34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4431975	
CA*F4961*6D*+TXV	A*VC950704CXA*	34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4431974	
CA*F4961*6D*+TXV	A*VC90704CXA*	34,600	24,900	12.2	14.5	32,200	24,800	33,400	8.5	20,000	4431973	
CA*F4961*6D*+TXV	MBVC2000**-.1*	35,000	25,200	13.0	15.0	32,600	25,100	33,000	9.0	20,000	4431972	
CA*F4961*6D*+TXV	MBVC1600**-.1A*	35,000	25,200	12.2	14.5	32,600	25,100	33,000	9.0	20,000	4431970	

See Notes on Page 28.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
SSZ14 0361B* (cont.)	CA*F4961*6D*+TXV	MBR1600** -1	34,600	24,900	12.0	14.0	32,200	24,800	33,400	8.5	20,000	4431968
	CHPF4860D6C*	A*VC90905DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261892
	CHPF4860D6C*	A*VC951155DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261891
	CHPF4860D6C*	G*VC90905DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261884
	CHPF4860D6C*	MBE2000** -1A*	34,600	24,900	13.0	15.0	32,200	24,800	33,000	9.0	20,000	4260491
	CHPF4860D6C*	G*VC951155DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4260488
	CHPF4860D6C*+EEP		34,800	25,100	12.0	14.0	32,400	24,900	33,000	8.5	20,000	4260489
	CHPF4860D6C*+EEP+TXV		35,000	25,200	12.0	14.0	32,600	25,100	33,000	8.5	20,000	4260490
	CHPF4860D6C*+TXV	A*VC951155DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261894
	CHPF4860D6C*+TXV	A*VC90905DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261893
	CHPF4860D6C*+TXV	G*VC90905DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261885
	CHPF4860D6C*+TXV	G*VC951155DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4260493
	CHPF4860D6C*+TXV	MBE2000** -1A*	34,600	24,900	13.0	15.0	32,200	24,800	33,000	9.0	20,000	4260492
	CHPF4860D6D*	A*VC90905DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261898
	CHPF4860D6D*	A*VC951155DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261897
	CHPF4860D6D*	A*VC950704CXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261896
	CHPF4860D6D*	A*VC950714CXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.5	20,000	4261895
	CHPF4860D6D*	G*VC90905DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261886
	CHPF4860D6D*	MBVC2000** -1A*	34,600	24,900	13.0	15.0	32,200	24,800	33,000	9.0	20,000	4260501
	CHPF4860D6D*	MBE2000** -1B	34,600	24,900	13.0	15.0	32,200	24,800	33,000	9.0	20,000	4260499
	CHPF4860D6D*	G*VC951155DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4260496
	CHPF4860D6D*	G*VC950704CXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4260495
	CHPF4860D6D*	G*VC950714CXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.5	20,000	4260494
	CHPF4860D6D*+EEP		34,800	25,100	12.0	14.0	32,400	24,900	33,000	8.6	20,000	4260497
	CHPF4860D6D*+EEP+TXV		35,000	25,200	12.0	14.0	32,600	25,100	33,000	8.6	20,000	4260498
	CHPF4860D6D*+TXV	A*VC950905DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261901
	CHPF4860D6D*+TXV	A*VC90905DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261900
	CHPF4860D6D*+TXV	A*VC951155DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261899
	CHPF4860D6D*+TXV	G*VC950905DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261888
	CHPF4860D6D*+TXV	G*VC90905DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261887
	CHPF4860D6D*+TXV	G*VC951155DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4260503
	CHPF4860D6D*+TXV	MBVC2000** -1*	34,600	24,900	13.0	15.0	32,200	24,800	33,000	9.0	20,000	4260502
	CHPF4860D6D*+TXV	MBE2000** -1B	34,600	24,900	13.0	15.0	32,200	24,800	33,000	9.0	20,000	4260500
	CSCF4860N6C*	A*VC951155DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261903
	CSCF4860N6C*	A*VC90905DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261902
	CSCF4860N6C*	G*VC90905DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261889
	CSCF4860N6C*	G*VC951155DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4260504
	CSCF4860N6C*+TXV	A*VC90905DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261905
	CSCF4860N6C*+TXV	A*VC951155DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261904
	CSCF4860N6C*+TXV	G*VC90905DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4261890
CSCF4860N6C*+TXV	G*VC951155DXA*	34,600	24,900	12.5	15.0	32,200	24,800	33,400	8.8	20,000	4260505	

¹ Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F

⁴ HSPF = Heating Seasonal Performance Factor

NOTES:

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
	AEPF426016C*		41,000	31,600	13.0	15.0	38,100	31,200	40,000	9.0	27,400	3068919
	AEPF426016C*+TXV		41,000	31,600	13.0	15.0	38,100	31,200	40,000	9.0	27,400	1492630
	AR*F374316B*		40,000	30,800	12.0	14.0	37,200	30,500	40,000	9.0	25,000	3068920
	AR*F374316B*+TXV		40,000	30,800	12.0	14.0	37,200	30,500	40,000	9.0	25,000	1492650
	AR*F374316C*		40,000	30,800	12.0	14.0	37,200	30,500	40,000	9.0	25,000	4358345
	ASPF426016B*		41,000	31,600	13.0	15.0	38,100	31,200	40,000	9.0	27,400	3068924
	ASPF426016B*+TXV		41,000	31,600	13.0	15.0	38,100	31,200	40,000	9.0	27,400	1492631
	ASPF426016C*		41,000	31,600	13.0	15.0	38,100	31,200	40,000	9.0	27,400	4358346
	ASPF426016C*+TXV		41,000	31,600	13.0	15.0	38,100	31,200	40,000	9.0	27,400	4358347
	ASPF426016D*		41,000	31,600	13.0	15.0	38,100	31,200	40,000	9.0	27,400	4149311
	ASPF426016D*+TXV		41,000	31,600	13.0	15.0	38,100	31,200	40,000	9.0	27,400	4149310
	ASPF426016E*		41,000	31,600	13.0	15.0	38,100	31,200	40,000	9.0	27,400	4358348
	ASPF426016E*+TXV		41,000	31,600	13.0	15.0	38,100	31,200	40,000	9.0	27,400	4358349
	AT*F374316A*		40,000	30,800	12.0	14.0	37,200	30,500	40,000	9.0	25,000	3068925
	AT*F374316A*+TXV		40,000	30,800	12.0	14.0	37,200	30,500	40,000	9.0	25,000	1483559
	AVPTC426014A*		41,000	31,600	13.0	15.0	38,100	31,200	40,000	9.0	27,400	4431314
	CA*F4860*6B*+TXV	A*VC950704CXA*	40,000	30,800	12.2	14.5	37,200	30,500	41,000	8.8	25,000	4589698
	CA*F4860*6B*+TXV	G*VC950704CXA*	40,000	30,800	12.2	14.5	37,200	30,500	41,000	8.8	25,000	3599314
	CA*F4860*6B*+TXV	G*V950704C**	40,000	30,800	12.2	14.5	37,200	30,500	41,000	8.8	25,000	3070890
	CA*F4860*6D*+TXV	A*VC950704CXA*	40,000	30,800	12.2	14.5	37,200	30,500	41,000	8.8	25,000	4589699
	CA*F4860*6D*+TXV	G*VC950704CXA*	40,000	30,800	12.2	14.5	37,200	30,500	41,000	8.8	25,000	3880786
	CA*F4860*6D*+TXV	G*V950704C**	40,000	30,800	12.2	14.5	37,200	30,500	41,000	8.8	25,000	3880774
	CA*F4961*6A*	A*VC90905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4594144
	CA*F4961*6A*	A*VC951155DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4589701
	CA*F4961*6A*	A*VC950905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4589700
	CA*F4961*6A*	G*VC90905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4579204
SSZ14	CA*F4961*6A*	MBVC2000**-1A*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3609978
0421A*	CA*F4961*6A*	G*VC951155DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3599542
	CA*F4961*6A*	G*VC950905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3599392
	CA*F4961*6A*	G*V951155D**	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3068939
	CA*F4961*6A*	G*V950905D**	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3068938
	CA*F4961*6A*	MBR2000**-1	40,000	30,800	12.0	14.0	37,200	30,500	41,000	9.0	25,000	3068937
	CA*F4961*6A*	MBE2000**-1	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3068936
	CA*F4961*6A*+EEP		41,000	31,600	12.0	14.0	38,100	31,200	41,000	9.0	27,400	3068935
	CA*F4961*6A*+EEP+TXV		41,000	31,600	12.0	14.0	38,100	31,200	41,000	9.0	27,400	1347227
	CA*F4961*6A*+TXV	A*VC951155DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4589703
	CA*F4961*6A*+TXV	A*VC950905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4589702
	CA*F4961*6A*+TXV	MBVC2000**-1*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3609994
	CA*F4961*6A*+TXV	G*VC951155DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3599540
	CA*F4961*6A*+TXV	G*VC950905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3599390
	CA*F4961*6A*+TXV	MBR2000**-1	40,000	30,800	12.0	14.0	37,200	30,500	41,000	9.0	25,000	1347181
	CA*F4961*6A*+TXV	G*V951155D**	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	1346777
	CA*F4961*6A*+TXV	G*V950905D**	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	1346776
	CA*F4961*6A*+TXV	MBE2000**-1	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	1346775
	CA*F4961*6D*	A*VC90905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4594145
	CA*F4961*6D*	A*VC951155DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4589705
	CA*F4961*6D*	A*VC950905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4589704
	CA*F4961*6D*	G*VC90905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4579205
	CA*F4961*6D*	MBVC2000**-1A*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4431990
	CA*F4961*6D*	MBR2000**-1	40,000	30,800	12.0	14.0	37,200	30,500	41,000	9.0	25,000	4431988
	CA*F4961*6D*	G*VC951155DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4431987
	CA*F4961*6D*	G*VC950905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4431986
	CA*F4961*6D*+EEP		41,000	31,600	12.0	14.0	38,100	31,200	41,000	9.0	27,400	4431860
	CA*F4961*6D*+EEP+TXV		41,000	31,600	12.0	14.0	38,100	31,200	41,000	9.0	27,400	4431861

See Notes on Page 28.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
SSZ14 0421A* (cont.)	CA*F4961*6D*+TXV	A*VC951155DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4589707
	CA*F4961*6D*+TXV	A*VC950905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4589706
	CA*F4961*6D*+TXV	G*VC951155DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4431993
	CA*F4961*6D*+TXV	G*VC950905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4431992
	CA*F4961*6D*+TXV	MBVC2000**1*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4431991
	CA*F4961*6D*+TXV	MBR2000**1	40,000	30,800	12.0	14.0	37,200	30,500	41,000	9.0	25,000	4431989
	CHPF4860D6C*	G*VC951155DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3599543
	CHPF4860D6C*	G*VC950905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3599393
	CHPF4860D6C*	G*V951155D**	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3068948
	CHPF4860D6C*	G*V950905D**	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3068947
	CHPF4860D6C*	MBE2000**1A*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3068946
	CHPF4860D6C*+EEP		41,000	31,600	12.0	14.0	38,100	31,200	41,000	9.0	27,400	3068945
	CHPF4860D6C*+EEP+TXV		41,000	31,600	12.0	14.0	38,100	31,200	41,000	9.0	27,400	1330369
	CHPF4860D6C*+TXV	MBE2000**1B	40,000	30,800	12.5	15.0	37,200	30,500	41,000	8.5	25,000	3606068
	CHPF4860D6C*+TXV	G*VC951155DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3599539
	CHPF4860D6C*+TXV	G*VC950905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3599389
	CHPF4860D6C*+TXV	G*V951155D**	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	1330433
	CHPF4860D6C*+TXV	G*V950905D**	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	1330432
	CHPF4860D6C*+TXV	MBE2000**1	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	1330431
	CHPF4860D6D*	A*VC90905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4594146
	CHPF4860D6D*	A*VC951155DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4589709
	CHPF4860D6D*	A*VC950905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4589708
	CHPF4860D6D*	G*VC90905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4579206
	CHPF4860D6D*	MBVC2000**1A*	40,000	30,800	12.0	15.0	37,200	30,500	41,000	9.0	25,000	3610039
	CHPF4860D6D*	G*VC951155DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3599545
	CHPF4860D6D*	G*VC950905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3599395
	CHPF4860D6D*	MBE2000**1B	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3300386
	CHPF4860D6D*	G*V951155D**	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3300383
	CHPF4860D6D*	G*V950905D**	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3300382
	CHPF4860D6D*+EEP		41,000	31,600	12.0	14.0	38,100	31,200	41,000	9.0	27,400	3300384
	CHPF4860D6D*+EEP+TXV		41,000	31,600	12.0	14.0	38,100	31,200	41,000	9.0	27,400	3300385
	CHPF4860D6D*+TXV	A*VC951155DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4589711
	CHPF4860D6D*+TXV	A*VC950905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	4589710
	CHPF4860D6D*+TXV	MBVC2000**1*	40,000	30,800	12.0	15.0	37,200	30,500	41,000	9.0	25,000	3610056
	CHPF4860D6D*+TXV	G*VC951155DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3599546
	CHPF4860D6D*+TXV	G*VC950905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3599396
	CHPF4860D6D*+TXV	G*V951155D**	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3300389
	CHPF4860D6D*+TXV	G*V950905D**	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3300388
	CHPF4860D6D*+TXV	MBE2000**1B	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3300387
	CT*F4860*6A*	MBVC2000**1A*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3610132
	CT*F4860*6A*	G*VC951155DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3599544
	CT*F4860*6A*	G*VC950905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3599394
	CT*F4860*6A*	G*V951155D**	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3068956
	CT*F4860*6A*	G*V950905D**	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3068955
	CT*F4860*6A*	MBR2000**1	40,000	30,800	12.0	14.0	37,200	30,500	41,000	9.0	25,000	3068954
	CT*F4860*6A*	MBE2000**1	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3068953
	CT*F4860*6A*+TXV	MBVC2000**1*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3610153
	CT*F4860*6A*+TXV	G*VC951155DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3599541
	CT*F4860*6A*+TXV	G*VC950905DXA*	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	3599391
	CT*F4860*6A*+TXV	G*V951155D**	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	1450121
CT*F4860*6A*+TXV	G*V950905D**	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	1450120	
CT*F4860*6A*+TXV	MBR2000**1	40,000	30,800	12.0	14.0	37,200	30,500	41,000	9.0	25,000	1450119	
CT*F4860*6A*+TXV	MBE2000**1	40,000	30,800	12.5	15.0	37,200	30,500	41,000	9.0	25,000	1450118	

See Notes on Page 36.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
SSZ14 0481A*	AEPF426016C*		47,000	35,700	13.0	15.0	43,700	35,400	47,000	8.8	30,000	3068959
	AEPF426016C*+TXV		47,000	35,700	13.0	15.0	43,700	35,400	47,000	8.8	30,000	1492632
	AR*F374316B*		47,000	35,700	12.0	14.0	43,700	35,400	47,000	8.5	30,000	3068960
	AR*F374316B*+TXV		47,000	35,700	12.0	14.0	43,700	35,400	47,000	8.5	30,000	1492651
	AR*F374316C*		47,000	35,700	12.0	14.0	43,700	35,400	47,000	8.5	30,000	4358350
	AR*F374316C*+TXV		47,000	35,700	12.0	14.0	43,700	35,400	47,000	8.5	30,000	4358351
	AR*F486016B*+TXV		45,000	34,200	11.5	13.5	41,900	33,900	46,000	8.5	30,000	3060423
	AR*F486016C*+TXV		45,000	34,200	11.5	13.5	41,900	33,900	46,000	8.5	30,000	3896079
	ASPF426016B*		47,000	35,700	13.0	15.0	43,700	35,400	47,000	8.8	30,000	3068964
	ASPF426016B*+TXV		47,000	35,700	13.0	15.0	43,700	35,400	47,000	8.8	30,000	1492633
	ASPF426016C*		47,000	35,700	13.0	15.0	43,700	35,400	47,000	8.8	30,000	4358352
	ASPF426016C*+TXV		47,000	35,700	13.0	15.0	43,700	35,400	47,000	8.8	30,000	4358353
	ASPF426016D*		47,000	35,700	13.0	15.0	43,700	35,400	47,000	8.8	30,000	4149313
	ASPF426016D*+TXV		47,000	35,700	13.0	15.0	43,700	35,400	47,000	8.8	30,000	4149312
	ASPF426016E*		47,000	35,700	13.0	15.0	43,700	35,400	47,000	8.8	30,000	4358354
	ASPF426016E*+TXV		47,000	35,700	13.0	15.0	43,700	35,400	47,000	8.8	30,000	4358355
	AT*F374316A*		47,000	35,700	12.0	14.0	43,700	35,400	47,000	8.5	30,000	3068965
	AT*F374316A*+TXV		47,000	35,700	12.0	14.0	43,700	35,400	47,000	8.5	30,000	1483560
	AVPTC426014A*		47,000	35,700	13.0	15.0	43,700	35,400	47,000	8.8	30,000	4431319
	CA*F4961*6A*	A*VC91155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4594148
	CA*F4961*6A*	A*VC90905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4594147
	CA*F4961*6A*	A*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589715
	CA*F4961*6A*	A*VC950915DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589714
	CA*F4961*6A*	A*VC950905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589713
	CA*F4961*6A*	A*VC950905CXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589712
	CA*F4961*6A*	G*VC91155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4579614
	CA*F4961*6A*	G*VC90905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4579613
	CA*F4961*6A*	G*VC950905CXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4184982
	CA*F4961*6A*	G*VC950915DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4184908
	CA*F4961*6A*	MBVC2000**-.1A*	46,000	35,000	12.5	15.0	42,800	34,700	46,000	9.0	30,000	3609979
	CA*F4961*6A*	G*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3599579
	CA*F4961*6A*	G*VC950905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3599426
	CA*F4961*6A*	G*V951155D**	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3068979
	CA*F4961*6A*	G*V950905D**	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3068978
	CA*F4961*6A*	MBR2000**-.1	46,000	35,000	12.0	14.0	42,800	34,700	47,000	8.5	30,000	3068976
	CA*F4961*6A*	MBE2000**-.1	46,000	35,000	12.5	15.0	42,800	34,700	46,000	9.0	30,000	3068975
	CA*F4961*6A*+EEP		46,000	35,000	12.0	14.0	42,800	34,700	47,000	8.8	30,000	3068974
	CA*F4961*6A*+EEP+TXV		46,000	35,000	12.0	14.0	42,800	34,700	47,000	8.8	30,000	1347228
	CA*F4961*6A*+TXV	A*VC90905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4594149
	CA*F4961*6A*+TXV	A*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589719
	CA*F4961*6A*+TXV	A*VC950915DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589718
	CA*F4961*6A*+TXV	A*VC950905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589717
	CA*F4961*6A*+TXV	A*VC950905CXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589716
	CA*F4961*6A*+TXV	G*VC90905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4579615
	CA*F4961*6A*+TXV	G*VC950905CXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4184983
	CA*F4961*6A*+TXV	G*VC950915DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4184909
	CA*F4961*6A*+TXV	MBVC2000**-.1*	46,000	35,000	12.5	15.0	42,800	34,700	46,000	9.0	30,000	3609995
	CA*F4961*6A*+TXV	G*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3599577
	CA*F4961*6A*+TXV	G*VC950905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3599424

See Notes on Page 36.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
SSZ14 0481A* (cont.)	CA*F4961*6A*+TXV	G*V950905D**	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	1347183
	CA*F4961*6A*+TXV	MBR2000** -1	46,000	35,000	12.0	14.0	42,800	34,700	47,000	8.5	30,000	1347182
	CA*F4961*6A*+TXV	G*V951155D**	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	1346780
	CA*F4961*6A*+TXV	MBE2000** -1	46,000	35,000	12.5	15.0	42,800	34,700	46,000	9.0	30,000	1346778
	CA*F4961*6D*	A*VC91155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4594151
	CA*F4961*6D*	A*VC90905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4594150
	CA*F4961*6D*	A*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589723
	CA*F4961*6D*	A*VC950915DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589722
	CA*F4961*6D*	A*VC950905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589721
	CA*F4961*6D*	A*VC950905CXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589720
	CA*F4961*6D*	G*VC91155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4579617
	CA*F4961*6D*	G*VC90905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4579616
	CA*F4961*6D*	MBVC2000** -1A*	46,000	35,000	12.5	15.0	42,800	34,700	46,000	9.0	30,000	4431999
	CA*F4961*6D*	MBR2000** -1	46,000	35,000	12.0	14.0	42,800	34,700	47,000	8.5	30,000	4431998
	CA*F4961*6D*	G*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4431997
	CA*F4961*6D*	G*VC950915DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4431996
	CA*F4961*6D*	G*VC950905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4431995
	CA*F4961*6D*	G*VC950905CXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4431994
	CA*F4961*6D*+EEP		46,000	35,000	12.0	14.0	42,800	34,700	47,000	8.8	30,000	4431862
	CA*F4961*6D*+EEP+TXV		46,000	35,000	12.0	14.0	42,800	34,700	47,000	8.8	30,000	4431863
	CA*F4961*6D*+TXV	A*VC91155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4594153
	CA*F4961*6D*+TXV	A*VC90905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4594152
	CA*F4961*6D*+TXV	A*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589727
	CA*F4961*6D*+TXV	A*VC950915DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589726
	CA*F4961*6D*+TXV	A*VC950905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589725
	CA*F4961*6D*+TXV	A*VC950905CXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589724
	CA*F4961*6D*+TXV	G*VC91155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4579619
	CA*F4961*6D*+TXV	G*VC90905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4579618
	CA*F4961*6D*+TXV	MBR2000** -1	46,000	35,000	12.0	14.0	42,800	34,700	47,000	8.5	30,000	4514556
	CA*F4961*6D*+TXV	G*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4432004
	CA*F4961*6D*+TXV	G*VC950915DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4432003
	CA*F4961*6D*+TXV	G*VC950905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4432002
	CA*F4961*6D*+TXV	G*VC950905CXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4432001
	CA*F4961*6D*+TXV	MBVC2000** -1*	46,000	35,000	12.5	15.0	42,800	34,700	46,000	9.0	30,000	4432000
	CHPF4860D6C*	G*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3599580
	CHPF4860D6C*	G*V951155D**	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3068985
	CHPF4860D6C*+EEP		47,000	35,700	12.0	14.0	43,700	35,400	46,000	9.0	30,000	3068983
	CHPF4860D6C*+EEP+TXV		47,000	35,700	12.0	14.0	43,700	35,400	46,000	9.0	30,000	1330370
	CHPF4860D6C*+TXV	MBVC2000** -1*	46,000	35,000	12.5	15.0	42,800	34,700	47,000	8.5	30,000	4393026
	CHPF4860D6C*+TXV	MBE2000** -1B	46,000	35,000	12.5	15.0	42,800	34,700	46,000	8.5	30,000	3606069
	CHPF4860D6C*+TXV	G*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3599576
	CHPF4860D6C*+TXV	G*V951155D**	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	1330435
	CHPF4860D6C*A*	MBR2000** -1	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3068984
	CHPF4860D6C*A*+TXV	MBR2000** -1	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	1330434
	CHPF4860D6D*	A*VC91155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4594154
	CHPF4860D6D*	A*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589728
	CHPF4860D6D*	G*VC91155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4579620
	CHPF4860D6D*	G*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3599583
	CHPF4860D6D*	MBR2000** -1	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3300393
	CHPF4860D6D*	G*V951155D**	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3300390
CHPF4860D6D*+EEP		47,000	35,700	12.0	14.0	43,700	35,400	46,000	9.0	30,000	3300391	
CHPF4860D6D*+EEP+TXV		47,000	35,700	12.0	14.0	43,700	35,400	46,000	9.0	30,000	3300392	

See Notes on Page 36.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
SSZ14 0481A* (cont.)	CHPF4860D6D*+TXV	A*VC91155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4594155
	CHPF4860D6D*+TXV	A*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589729
	CHPF4860D6D*+TXV	G*VC91155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4579621
	CHPF4860D6D*+TXV	MBVC2000** -1*	46,000	35,000	12.5	15.0	42,800	34,700	46,000	8.5	30,000	3930741
	CHPF4860D6D*+TXV	G*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3599584
	CHPF4860D6D*+TXV	G*V951155D**	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3300396
	CHPF4860D6D*+TXV	MBR2000** -1	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3300394
	CHPF4860D6D*A*	MBR2000** -1	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3300395
	CSCF4860N6C*	A*VC91155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4594157
	CSCF4860N6C*	A*VC90905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4594156
	CSCF4860N6C*	A*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589733
	CSCF4860N6C*	A*VC950915DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589732
	CSCF4860N6C*	A*VC950905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589731
	CSCF4860N6C*	A*VC950905CXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589730
	CSCF4860N6C*	G*VC91155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4579623
	CSCF4860N6C*	G*VC90905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4579622
	CSCF4860N6C*	G*VC950905CXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4184984
	CSCF4860N6C*	G*VC950915DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4184910
	CSCF4860N6C*	G*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3599581
	CSCF4860N6C*	G*VC950905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3599427
	CSCF4860N6C*	G*V951155D**	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3068989
	CSCF4860N6C*	G*V950905D**	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3068988
	CSCF4860N6C*+TXV	A*VC91155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4594159
	CSCF4860N6C*+TXV	A*VC90905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4594158
	CSCF4860N6C*+TXV	A*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589737
	CSCF4860N6C*+TXV	A*VC950915DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589736
	CSCF4860N6C*+TXV	A*VC950905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589735
	CSCF4860N6C*+TXV	A*VC950905CXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4589734
	CSCF4860N6C*+TXV	G*VC91155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4579625
	CSCF4860N6C*+TXV	G*VC90905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4579624
	CSCF4860N6C*+TXV	G*VC950905CXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4184985
	CSCF4860N6C*+TXV	G*VC950915DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	4184911
	CSCF4860N6C*+TXV	G*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3599575
	CSCF4860N6C*+TXV	G*VC950905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3599423
	CSCF4860N6C*+TXV	G*V951155D**	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	1296668
	CSCF4860N6C*+TXV	G*V950905D**	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	1296667
	CT*F4860*6A*	MBVC2000** -1A*	46,000	35,000	12.5	15.0	42,800	34,700	46,000	9.0	30,000	3610133
	CT*F4860*6A*	G*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3599582
	CT*F4860*6A*	G*VC950905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3599428
	CT*F4860*6A*	G*V951155D**	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3068994
	CT*F4860*6A*	G*V950905D**	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3068993
	CT*F4860*6A*	MBR2000** -1	46,000	35,000	12.0	14.0	42,800	34,700	47,000	8.5	30,000	3068991
	CT*F4860*6A*	MBE2000** -1	46,000	35,000	12.5	15.0	42,800	34,700	46,000	9.0	30,000	3068990
	CT*F4860*6A*+TXV	MBVC2000** -1*	46,000	35,000	12.5	15.0	42,800	34,700	46,000	9.0	30,000	3610154
	CT*F4860*6A*+TXV	G*VC951155DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3599578
	CT*F4860*6A*+TXV	G*VC950905DXA*	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	3599425
	CT*F4860*6A*+TXV	G*V951155D**	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	1450126
	CT*F4860*6A*+TXV	MBR2000** -1	46,000	35,000	12.0	14.0	42,800	34,700	47,000	8.5	30,000	1450124
CT*F4860*6A*+TXV	MBE2000** -1	46,000	35,000	12.5	15.0	42,800	34,700	46,000	9.0	30,000	1450123	
CT*F4860*6A*+TXV	G*V950905D**	46,000	35,000	12.0	14.5	42,800	34,700	47,000	8.5	30,000	1450122	

See Notes on Page 36.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
SSZ14 0601A*	AEPF426016C*		57,000	42,200	12.0	14.5	53,000	41,900	59,000	8.8	39,000	3068997
	AEPF426016C*+TXV		57,000	42,200	12.0	14.5	53,000	41,900	59,000	8.8	39,000	1492634
	AR*F374316B*		57,000	42,200	11.5	13.5	53,000	41,900	57,000	8.5	33,000	3068998
	AR*F374316B*+TXV		57,000	42,200	11.5	13.5	53,000	41,900	57,000	8.5	33,000	3018432
	AR*F374316C*		57,000	42,200	11.5	13.5	53,000	41,900	57,000	8.5	33,000	4358356
	AR*F374316C*+TXV		57,000	42,200	11.5	13.5	53,000	41,900	57,000	8.5	33,000	4358357
	AR*F496116A*		57,000	42,200	12.2	14.0	53,000	41,900	57,000	8.5	33,000	3068999
	AR*F496116A*+TXV		57,000	42,200	12.2	14.0	53,000	41,900	57,000	8.5	33,000	1492635
	AR*F496116C*		57,000	42,200	12.2	14.0	53,000	41,900	57,000	8.5	33,000	4358358
	AR*F496116C*+TXV		57,000	42,200	12.2	14.0	53,000	41,900	57,000	8.5	33,000	4358359
	ASPF426016B*		57,000	42,200	12.0	14.5	53,000	41,900	59,000	8.8	39,000	3069003
	ASPF426016B*+TXV		57,000	42,200	12.0	14.5	53,000	41,900	59,000	8.8	39,000	1492636
	ASPF426016C*		57,000	42,200	12.0	14.5	53,000	41,900	59,000	8.8	39,000	4358360
	ASPF426016C*+TXV		57,000	42,200	12.0	14.5	53,000	41,900	59,000	8.8	39,000	4358361
	ASPF426016D*		57,000	42,200	12.0	14.5	53,000	41,900	59,000	8.8	39,000	4149315
	ASPF426016D*+TXV		57,000	42,200	12.0	14.5	53,000	41,900	59,000	8.8	39,000	4149314
	ASPF426016E*		57,000	42,200	12.0	14.5	53,000	41,900	59,000	8.8	39,000	4358362
	ASPF426016E*+TXV		57,000	42,200	12.0	14.5	53,000	41,900	59,000	8.8	39,000	4358363
	AT*F374316A*		57,000	42,200	11.5	13.5	53,000	41,900	57,000	8.5	33,000	3069004
	AT*F374316A*+TXV		57,000	42,200	11.5	13.5	53,000	41,900	57,000	8.5	33,000	1483561
	AT*F486016A*		57,000	42,200	11.5	13.5	53,000	41,900	57,000	8.5	33,000	3069005
	AT*F486016A*+TXV		57,000	42,200	11.5	13.5	53,000	41,900	57,000	8.5	33,000	1483562
	AVPTC426014A*		57,000	42,200	12.0	14.5	53,000	41,900	59,000	8.8	39,000	4431327
	CA*F4961*6A*	A*VC951155DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4589741
	CA*F4961*6A*	A*VC950915DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4589740
	CA*F4961*6A*	A*VC950905DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4589739
	CA*F4961*6A*	A*VC950905CXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4589738
	CA*F4961*6A*	G*VC950905CXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4184986
	CA*F4961*6A*	G*VC950915DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4184912
	CA*F4961*6A*	MBVC2000** -1A*	56,500	41,800	12.5	15.0	52,500	41,500	57,000	9.0	33,000	3609981
	CA*F4961*6A*	G*VC951155DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	3599619
	CA*F4961*6A*	G*VC950905DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	3599454
	CA*F4961*6A*	G*V951155D**	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	3069018
	CA*F4961*6A*	G*V950905D**	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	3069017
	CA*F4961*6A*	MBR2000** -1	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	3069016
	CA*F4961*6A*	MBE2000** -1	56,500	41,800	12.5	15.0	52,500	41,500	57,000	9.0	33,000	3069015
	CA*F4961*6A*+EEP		57,000	42,200	12.0	14.0	53,000	41,900	58,000	8.8	39,500	3069014
	CA*F4961*6A*+EEP+TXV		57,000	42,200	12.0	14.0	53,000	41,900	58,000	8.8	39,500	1347229
	CA*F4961*6A*+TXV	A*VC951155DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4589745
	CA*F4961*6A*+TXV	A*VC950915DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4589744
	CA*F4961*6A*+TXV	A*VC950905DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4589743
	CA*F4961*6A*+TXV	A*VC950905CXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4589742
	CA*F4961*6A*+TXV	G*VC950905CXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4184987
	CA*F4961*6A*+TXV	G*VC950915DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4184913
	CA*F4961*6A*+TXV	MBVC2000** -1*	56,500	41,800	12.5	15.0	52,500	41,500	57,000	9.0	33,000	3609996
	CA*F4961*6A*+TXV	G*VC951155DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	3599617
	CA*F4961*6A*+TXV	G*VC950905DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	3599452
	CA*F4961*6A*+TXV	MBR2000** -1	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	1347184
	CA*F4961*6A*+TXV	G*V951155D**	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	1346783

See Notes on Page 36.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
SSZ14 0601A* (cont.)	CA*F4961*6A*+TXV	G*V950905D**	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	1346782
	CA*F4961*6A*+TXV	MBE2000**_1	56,500	41,800	12.5	15.0	52,500	41,500	57,000	9.0	33,000	1346781
	CA*F4961*6D*	A*VC951155DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4589749
	CA*F4961*6D*	A*VC950915DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4589748
	CA*F4961*6D*	A*VC950905DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4589747
	CA*F4961*6D*	A*VC950905CXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4589746
	CA*F4961*6D*	MBVC2000**_1A*	56,500	41,800	12.5	15.0	52,500	41,500	57,000	9.0	33,000	4432010
	CA*F4961*6D*	MBR2000**_1	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4432009
	CA*F4961*6D*	G*VC951155DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4432008
	CA*F4961*6D*	G*VC950915DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4432007
	CA*F4961*6D*	G*VC950905DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4432006
	CA*F4961*6D*	G*VC950905CXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4432005
	CA*F4961*6D*+EEP		57,000	42,200	12.0	14.0	53,000	41,900	58,000	8.8	39,500	4431864
	CA*F4961*6D*+EEP+TXV		57,000	42,200	12.0	14.0	53,000	41,900	58,000	8.8	39,500	4431865
	CA*F4961*6D*+TXV	A*VC951155DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4589753
	CA*F4961*6D*+TXV	A*VC950915DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4589752
	CA*F4961*6D*+TXV	A*VC950905DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4589751
	CA*F4961*6D*+TXV	A*VC950905CXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4589750
	CA*F4961*6D*+TXV	MBR2000**_1	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4514557
	CA*F4961*6D*+TXV	G*VC951155DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4432015
	CA*F4961*6D*+TXV	G*VC950915DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4432014
	CA*F4961*6D*+TXV	G*VC950905DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4432013
	CA*F4961*6D*+TXV	G*VC950905CXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	4432012
	CA*F4961*6D*+TXV	MBVC2000**_1*	56,500	41,800	12.5	15.0	52,500	41,500	57,000	9.0	33,000	4432011
	CHPF4860D6C*	G*VC951155DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3599613
	CHPF4860D6C*	G*VC950905DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3599455
	CHPF4860D6C*	G*V951155D**	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3069029
	CHPF4860D6C*	G*V950905D**	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3069028
	CHPF4860D6C*	MBE2000**_1A*	56,500	41,800	12.5	15.0	52,500	41,500	57,000	9.0	33,000	3069026
	CHPF4860D6C*+EEP		57,000	42,200	12.0	14.0	53,000	41,900	58,000	8.8	39,500	3069025
	CHPF4860D6C*+EEP+TXV		57,000	42,200	12.0	14.0	53,000	41,900	58,000	8.8	39,500	1330372
	CHPF4860D6C*+TXV	G*VC951155DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3599612
	CHPF4860D6C*+TXV	G*VC950905DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3599451
	CHPF4860D6C*+TXV	G*V951155D**	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	1330437
	CHPF4860D6C*+TXV	G*V950905D**	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	1330436
	CHPF4860D6C*+TXV	MBE2000**_1A*	56,500	41,800	12.5	15.0	52,500	41,500	57,000	9.0	33,000	1330371
	CHPF4860D6C*A*	MBR2000**_1	57,000	42,200	12.0	14.0	53,000	41,900	57,000	8.8	38,000	3069027
	CHPF4860D6C*A*+TXV	MBR2000**_1	57,000	42,200	12.0	14.0	53,000	41,900	57,000	8.8	38,000	1330373
	CHPF4860D6D*	A*VC951155DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	4589757
	CHPF4860D6D*	A*VC950915DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	4589756
	CHPF4860D6D*	A*VC950905DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	4589755
	CHPF4860D6D*	A*VC950905CXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	4589754
	CHPF4860D6D*	G*VC950905CXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	4184988
	CHPF4860D6D*	G*VC950915DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	4184914
	CHPF4860D6D*	MBVC2000**_1A*	56,500	41,800	12.5	15.0	52,500	41,500	57,000	9.0	33,000	3610041
	CHPF4860D6D*	G*VC951155DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3599615
	CHPF4860D6D*	G*VC950905DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3599457
	CHPF4860D6D*	MBR2000**_1	57,000	42,200	12.0	14.0	53,000	41,900	57,000	8.8	38,000	3300403
	CHPF4860D6D*	MBE2000**_1B	56,500	41,800	12.5	15.0	52,500	41,500	57,000	9.0	33,000	3300401

See Notes on Page 36.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	EER ²	SEER ¹	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
SSZ14 0601A* (cont.)	CHPF4860D6D*	G*V951155D**	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3300398
	CHPF4860D6D*	G*V950905D**	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3300397
	CHPF4860D6D*+EEP		57,000	42,200	12.0	14.0	53,000	41,900	58,000	8.8	39,500	3300399
	CHPF4860D6D*+EEP+TXV		57,000	42,200	12.0	14.0	53,000	41,900	58,000	8.8	39,500	3300400
	CHPF4860D6D*+TXV	A*VC951155DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	4589761
	CHPF4860D6D*+TXV	A*VC950915DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	4589760
	CHPF4860D6D*+TXV	A*VC950905DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	4589759
	CHPF4860D6D*+TXV	A*VC950905CXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	4589758
	CHPF4860D6D*+TXV	G*VC950905CXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	4184989
	CHPF4860D6D*+TXV	G*VC950915DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	4184915
	CHPF4860D6D*+TXV	MBVC2000** -1*	56,500	41,800	12.5	15.0	52,500	41,500	57,000	9.0	33,000	3610057
	CHPF4860D6D*+TXV	G*VC951155DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3599616
	CHPF4860D6D*+TXV	G*VC950905DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3599458
	CHPF4860D6D*+TXV	G*V951155D**	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3300407
	CHPF4860D6D*+TXV	G*V950905D**	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3300406
	CHPF4860D6D*+TXV	MBR2000** -1	57,000	42,200	12.0	14.0	53,000	41,900	57,000	8.8	38,000	3300404
	CHPF4860D6D*+TXV	MBE2000** -1B	56,500	41,800	12.5	15.0	52,500	41,500	57,000	9.0	33,000	3300402
	CHPF4860D6D*A*	MBR2000** -1	57,000	42,200	12.0	14.0	53,000	41,900	57,000	8.8	38,000	3300405
	CSCF4860N6C*	A*VC951155DXA*	56,500	41,800	11.5	13.5	52,500	41,500	57,000	8.5	33,000	4589763
	CSCF4860N6C*	A*VC90905DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	4589762
	CSCF4860N6C*	G*VC951155DXA*	56,500	41,800	11.5	13.5	52,500	41,500	57,000	8.5	33,000	3599614
	CSCF4860N6C*	G*VC90905DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3599117
	CSCF4860N6C*	G*V951155D**	56,500	41,800	11.5	13.5	52,500	41,500	57,000	8.5	33,000	3069033
	CSCF4860N6C*	G*V90905D**	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3069032
	CSCF4860N6C*+TXV	A*VC951155DXA*	56,500	41,800	11.5	13.5	52,500	41,500	57,000	8.5	33,000	4589765
	CSCF4860N6C*+TXV	A*VC90905DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	4589764
	CSCF4860N6C*+TXV	G*VC951155DXA*	56,500	41,800	11.5	13.5	52,500	41,500	57,000	8.5	33,000	3599611
	CSCF4860N6C*+TXV	G*VC90905DXA*	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	3599116
	CSCF4860N6C*+TXV	G*V951155D**	56,500	41,800	11.5	13.5	52,500	41,500	57,000	8.5	33,000	1296670
	CSCF4860N6C*+TXV	G*V90905D**	56,500	41,800	11.5	14.0	52,500	41,500	57,000	8.5	33,000	1296669
	CT*F4860*6A*	MBVC2000** -1A*	56,500	41,800	12.5	15.0	52,500	41,500	57,000	9.0	33,000	3610134
	CT*F4860*6A*	G*VC951155DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	3599620
	CT*F4860*6A*	G*VC950905DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	3599456
	CT*F4860*6A*	G*V951155D**	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	3069037
	CT*F4860*6A*	G*V950905D**	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	3069036
	CT*F4860*6A*	MBR2000** -1	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	3069035
	CT*F4860*6A*	MBE2000** -1	56,500	41,800	12.5	15.0	52,500	41,500	57,000	9.0	33,000	3069034
	CT*F4860*6A*+TXV	MBVC2000** -1*	56,500	41,800	12.5	15.0	52,500	41,500	57,000	9.0	33,000	3610155
	CT*F4860*6A*+TXV	G*VC951155DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	3599618
	CT*F4860*6A*+TXV	G*VC950905DXA*	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	3599453
	CT*F4860*6A*+TXV	G*V951155D**	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	1450130
	CT*F4860*6A*+TXV	G*V950905D**	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	1450129
	CT*F4860*6A*+TXV	MBR2000** -1	56,500	41,800	12.0	14.0	52,500	41,500	57,000	8.5	33,000	1450128
	CT*F4860*6A*+TXV	MBE2000** -1	56,500	41,800	12.5	15.0	52,500	41,500	57,000	9.0	33,000	1450127

¹ Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F


³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F

⁴ HSPF = Heating Seasonal Performance Factor

NOTES:


- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

DIMENSIONS

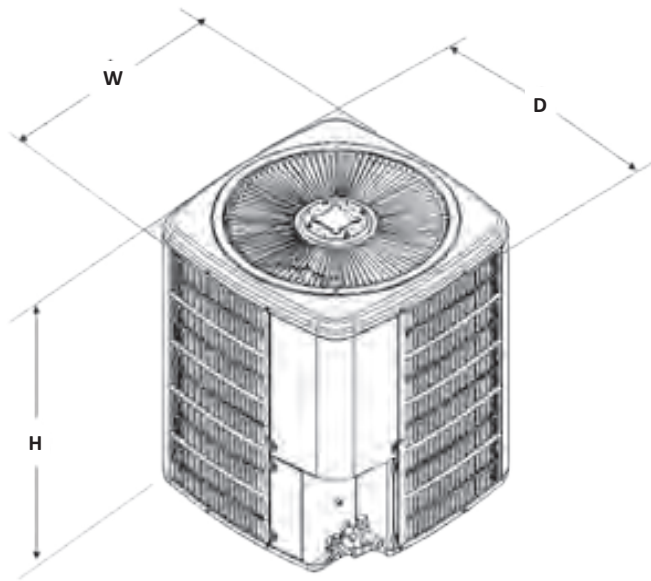

MODEL	DIMENSIONS		
	W"	D"	H"
SSZ140181A	29	29	34 $\frac{1}{4}$
SSZ140241A	29	29	38 $\frac{1}{4}$
SSZ140301A	29	29	38 $\frac{1}{4}$
SSZ140361B	29	29	38 $\frac{1}{4}$
SSZ140421A	35 $\frac{1}{2}$	35 $\frac{1}{2}$	38 $\frac{1}{4}$
SSZ140481A	35 $\frac{1}{2}$	35 $\frac{1}{2}$	38 $\frac{1}{4}$
SSZ140601A	35 $\frac{1}{2}$	35 $\frac{1}{2}$	38 $\frac{1}{4}$

WIRING DIAGRAM—SSZ14018/30/42-601AF, 241AJ, 361B*

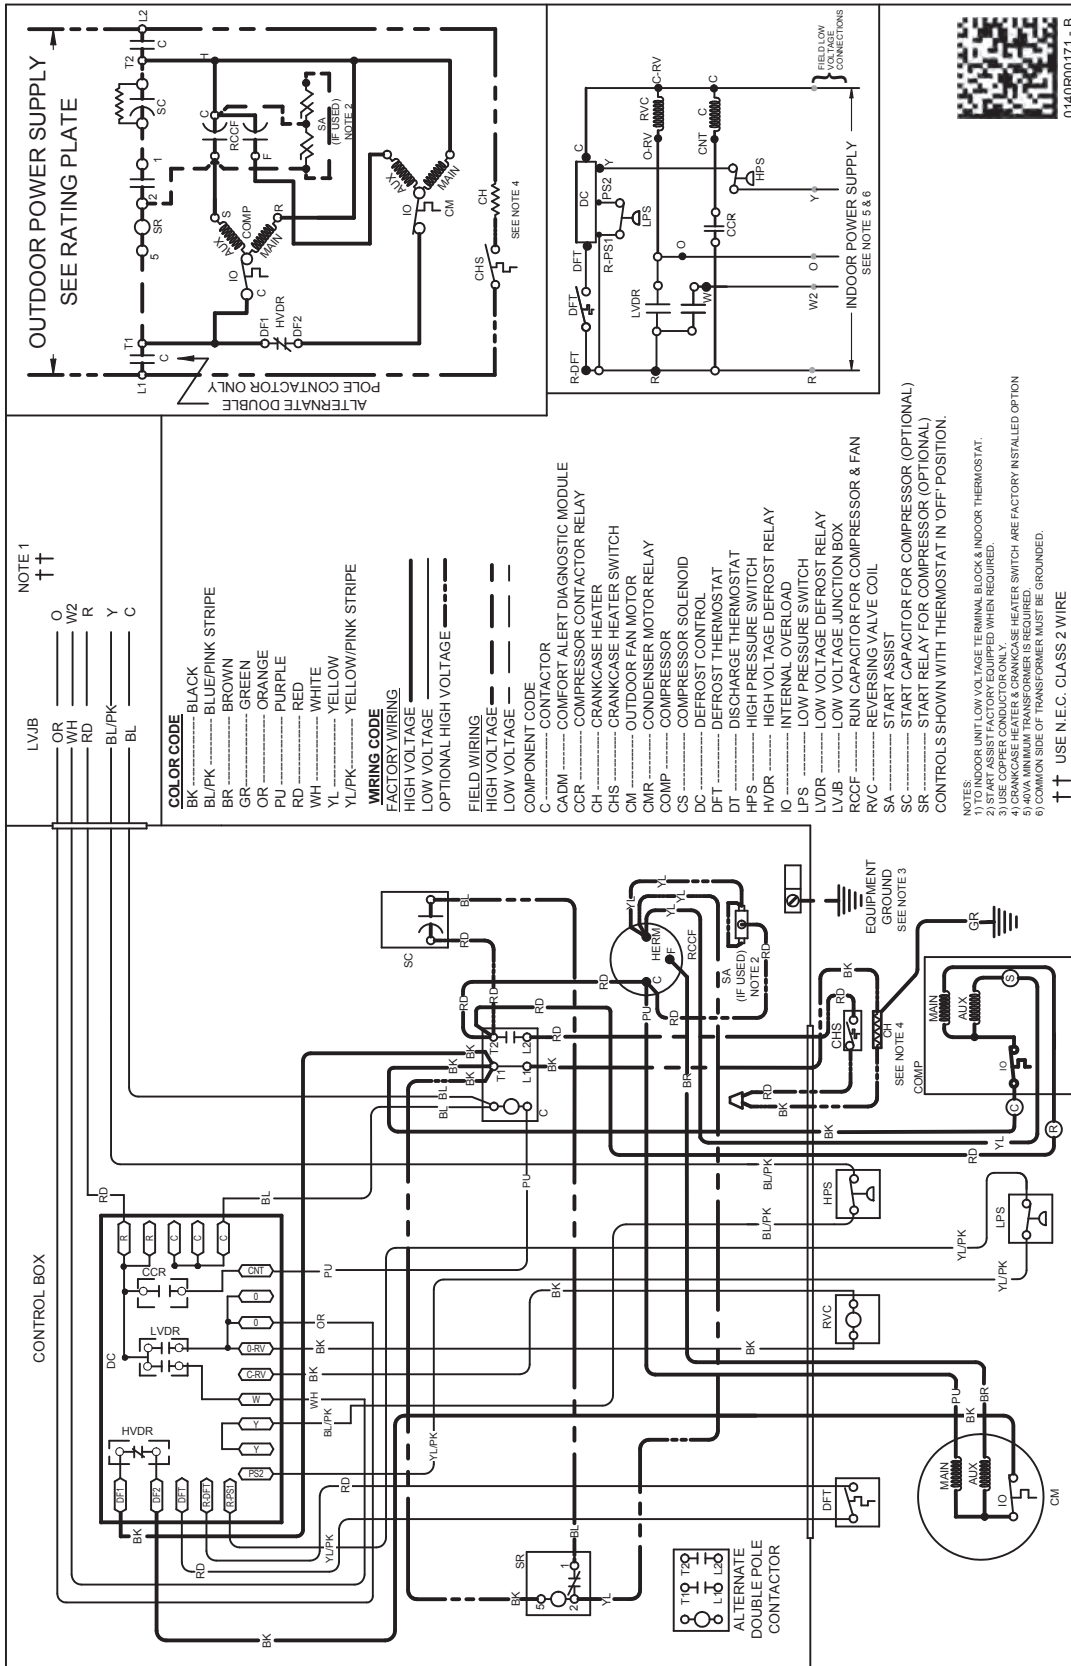

WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

ACCESSORIES

MODEL	DESCRIPTION	SSZ14 0181A	SSZ14 0241A	SSZ14 0301A	SSZ14 0361B	SSZ14 0421A	SSZ14 0481A	SSZ14 0601A
ABK-20	Anchor Bracket Kit *	X	X	X	X	X	X	X
AFE18-60A	All-fuel Kit	X	X	X	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X			
CSR-U-2	Hard-start Kit				X	X	X	X
CSR-U-3	Hard-start Kit						X	X
FSK01A ¹	Freeze Protection Kit	X	X	X	X	X	X	X
OT/EHR18-60	Emergency Heat Relay kit	X	X	X	X	X	X	X
OT18-60A ²	Outdoor Thermostat w/ Lockout Stat	X	X	X	X	X	X	X
TX2N4 ³	TXV Kit	X						
TX2N4A ³	TXV Kit	X	X					
TX3N4 ³	TXV Kit			X	X			
TX5N4 ³	TXV Kit					X	X	X

* Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Required for heat pump applications where ambient temperatures fall below 0 °F with 50% or higher relative humidity.

³ Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device. The TXV should always be sized based on the tonnage of the outdoor unit.

